

**Geleceğin
Akışını
Değıştir!**



AKIS

2024/05



Engineered to Perfection



GEARBOX MACHINES






Speed: 0,27-3,20 m/s

Capacity: 100-9.750 kg

Travel Distance: 11-51 meter



MUGEN MF 1 PRO E MUGEN MF 1



mugen
MF1 PRO-E 7,5 kW
1,0 M-800 KG

21-30 Metre Seyir Mesafesi

21-30 Meter Travel Distance




1:1 Askı

1:1 Suspension

3500 Kg Statik Yük

3500 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)	Makine Ağırlığı (Kg.)
Product	Speed (m/s)	Capacity (Kg)	Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)	Machine Weigth (Kg.)
MUGEN MF 1 Pro-E	1,00	400	5,5	425*5*10	13,0	67/2	30	160
MUGEN MF 1 Pro-E	1,00	500	7,5	425*5*10	17,0	67/2	30	170
MUGEN MF 1 Pro-E	1,00	630	5,5	425*5*10	13,0	67/2	21	160
MUGEN MF 1 Pro-E	1,00	800	7,5	425*5*10	17,0	67/2	21	170



mugen
MF1-7,5 kW
1,0 M-800 KG

21-30 Metre Seyir Mesafesi

21-30 Meter Travel Distance





1:1 Askı

1:1 Suspension

3500 Kg Statik Yük

3500 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)	Makine Ağırlığı (Kg.)
Product	Speed (m/s)	Capacity (Kg)	Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)	Machine Weigth (Kg.)
MUGEN MF 1	1,0	400	5,5	425*5*10	13	67/2	30	175
MUGEN MF 1	1,0	500	7,5	425*5*10	17	67/2	30	190
MUGEN MF 1	1,0	630	5,5	425*5*10	13	67/2	21	175
MUGEN MF 1	1,0	800	7,5	425*5*10	17	67/2	21	190

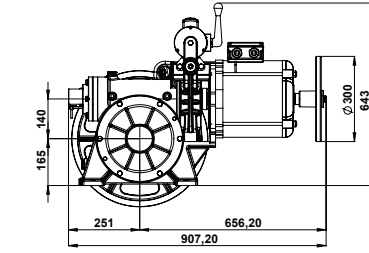

mugen
MF2-7,5 kW
1,0 M-800 KG



21-30 Metre Seyir Mesafesi

21-30 Meter Travel Distance





1:1 Askı

1:1 Suspension

3500 Kg Statik Yük

3500 Kg Static Load





Ürün	Hız (m/s)	Kapasite (Kg)	Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)	Makine Ağırlığı (Kg.)
Product	Speed (m/s)	Capacity (Kg)	Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)	Machine Weigh (Kg.)
MUGEN MF2	0,63	630	5,5 kW	400*5*10	13,0	47/1	30	210
MUGEN MF2	0,63	800	7,5 kW	400*6*10	17,0	47/1	30	225
MUGEN MF2	0,63	800	5,5 kW	400*5*10	13,0	47/1	21	210
MUGEN MF2	0,63	1000	7,5 kW	400*6*10	17,0	47/1	21	225
MUGEN MF2	0,71	560	5,5 kW	480*5*10	13,0	53/1	30	225
MUGEN MF2	0,71	750	7,5 kW	480*6*10	17,0	53/1	30	230
MUGEN MF2	0,71	800	5,5 kW	480*5*10	13,0	53/1	21	225
MUGEN MF2	0,71	1000	7,5 kW	480*6*10	17,0	53/1	21	230
MUGEN MF2	1,00	400	5,5 kW	480*5*10	13,0	38/1	30	225
MUGEN MF2	1,00	500	7,5 kW	480*5*10	17,0	38/1	30	230
MUGEN MF2	1,00	630	5,5 kW	480*5*10	13,0	38/1	21	225
MUGEN MF2	1,00	800	7,5 kW	480*5*10	17,0	38/1	21	230
MUGEN M2	0,63 TEK HIZ	320	3,5 HP	480*4*10	8,0	58/2	21	220
MUGEN M2	1,00-0,25	480	5,5 HP	480*5*10	9,5/6,5	38/1	21	225
MUGEN M2	1,00-0,25	500	6,2 HP	480*5*10	11,5/6,8	38/1	21	250
MUGEN M2	1,00-0,25	720	8,2 HP	480*5*10	14/8,5	38/1	21	270
MUGEN M2	1,00-0,25	880	10,5 HP	480*5*10	18,5/15,0	38/1	21	290
MUGEN M2	0,80-0,20	560	5,5 HP	550*5*10	9,5/6,5	55/1	21	210
MUGEN M2	0,71-0,17	630	5,5 HP	480*5*10	9,5/6,5	53/1	21	225
MUGEN M2	0,71-0,17	700	6,2 HP	480*5*10	11,5/6,8	53/1	21	250
MUGEN M2	0,71-0,17	900	8,2 HP	480*5*10	14/8,5	53/1	21	270
MUGEN M2	0,71-0,17	1000	10,5 HP	480*6*10	18,5/15,0	53/1	21	290
MUGEN M2	0,63-0,15	700	5,5 HP	400*5*10	9,5/6,5	47/1	21	210
MUGEN M2	0,63-0,15	800	6,2 HP	400*5*10	11,5/6,8	47/1	21	245
MUGEN M2	0,63-0,15	1000	8,2 HP	400*6*10	14/8,5	47/1	21	265

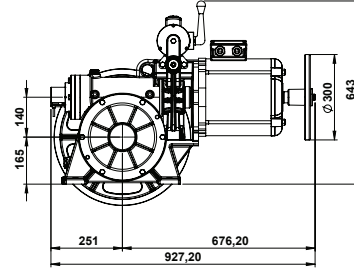

VOLPI
VOLPI VF2-7,5 kW
1,0 M-800 KG

33-51 Metre Seyir Mesafesi
33-51 Meter Travel Distance
1:1 Askı
1:1 Suspension
3500 Kg Statik Yük
3500 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)	Makine Ağırlığı (Kg.)
Product	Speed (m/s)	Capacity (Kg)	Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)	Machine Weigth (Kg.)
VF2	0,63	800	5,5 kW	400*5*10	14,4	47/1	33	225
VF2	0,63	1000	7,5 kW	400*6*10	17,0	47/1	33	235
VF2	0,71	800	5,5 kW	480*5*10	14,4	53/1	33	225
VF2	0,71	1000	7,5 kW	480*6*10	17,0	53/1	33	235
VF2	1,00	630	5,5 kW	480*5*10	14,4	38/1	33	225
VF2	1,00	800	7,5 kW	480*5*10	17,0	38/1	33	235

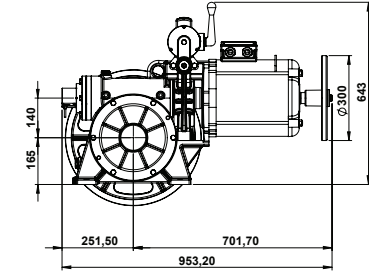

volpi
VOLPI VF2X-7,5 kW
1,0 M-800 KG



33-51 Metre Seyir Mesafesi

33-51 Meter Travel Distance





1:1 Askı

1:1 Suspension

3500 Kg Statik Yük

3500 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)	Makine Ağırlığı (Kg.)
Product	Speed (m/s)	Capacity (Kg)	Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)	Machine Weigh (Kg.)
VF2X	0,63	700	4,0 kW	400*5*10	10,5	47/1	51	220
VF2X	0,63	800	5,5 kW	400*5*10	13,5	47/1	51	230
VF2X	0,63	1000	7,5 kW	400*6*10	17,5	47/1	51	245
VF2X	0,71	630	4,0 kW	480*5*10	10,5	52/1	51	225
VF2X	0,71	800	5,5 kW	480*5*10	13,5	52/1	51	235
VF2X	0,71	1000	7,5 kW	480*6*10	17,5	52/1	51	250
VF2X	1,00	450	4,0 kW	480*5*10	10,5	38/1	51	225
VF2X	1,00	630	5,5 kW	480*5*10	13,5	38/1	51	235
VF2X	1,00	800	7,5 kW	480*5*10	17,5	38/1	51	250
VF2X	1,60	320	4,0 kW	480*4*10	10,5	48/2	51	225
VF2X	1,60	450	5,5 kW	480*4*10	13,5	48/2	51	235
VF2X	1,60	630	7,5 kW	480*5*10	17,5	48/2	51	250
V2X	0,63 TEK HIZ	320	3,5 HP	480*4*10	8,0	58/2	33	225
V2X	1,00-0,25	480	5,5 HP	480*5*10	9,5/6,5	38/1	33	245
V2X	1,00-0,25	500	6,2 HP	480*5*10	11,5/6,8	38/1	33	260
V2X	1,00-0,25	720	8,2 HP	480*5*10	14/8,5	38/1	33	280
V2X	1,00-0,25	880	10,5 HP	480*5*10	18,5/15,0	38/1	33	300
V2X	0,80-0,20	560	5,5 HP	550*5*10	9,5/6,5	55/1	33	245
V2X	0,71-0,17	630	5,5 HP	480*5*10	9,5/6,5	52/1	33	245
V2X	0,71-0,17	700	6,2 HP	480*5*10	11,5/6,8	52/1	33	260
V2X	0,71-0,17	900	8,2 HP	480*5*10	14/8,5	52/1	33	280
V2X	0,71-0,17	1000	10,5 HP	480*6*10	18,5/15,0	52/1	33	300
V2X	0,63-0,15	700	5,5 HP	400*5*10	9,5/6,5	47/1	33	255
V2X	0,63-0,15	800	6,2 HP	400*5*10	11,5/6,8	47/1	33	265
V2X	0,63-0,15	1000	8,2 HP	400*6*10	14/8,5	47/1	33	280



MAKİS
volpi vf2x 7,5 kW
12M. çift tambur tek halat 2:1 askı

6,5-40 Metre Seyir Mesafesi

6,5-40 Meter Travel Distance

1:1 Askı

1:1 Suspension





3500 Kg Statik Yük

3500 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg) _Kabin Ağırlığı Dahil		Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)
Product	Speed (m/s)	Capacity (Kg) _Cabin Weight Included		Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)
VF2X	0,59	469	Tek Tambur Tek Halat-13M.	4,0	400*10	10,5	53/1	13
VF2X	0,59	644	Tek Tambur Tek Halat-13M.	5,5	400*10	13,5	53/1	13
VF2X	0,59	878	Tek Tambur Tek Halat-13M.	7,5	400*10	17,5	53/1	13
VF2X	0,59	469	Tek Tambur Çift Halat-6,5M.	4,0	400*10	10,5	53/1	6,5
VF2X	0,59	644	Tek Tambur Çift Halat-6,5M.	5,5	400*10	13,5	53/1	6,5
VF2X	0,59	878	Tek Tambur Çift Halat-6,5M.	7,5	400*10	17,5	53/1	6,5
VF2X	0,59	469	Çift Tambur Tek halat-13M.	4,0	400*10	10,5	53/1	13
VF2X	0,59	644	Çift Tambur Tek halat-13M.	5,5	400*10	13,5	53/1	13
VF2X	0,59	878	Çift Tambur Tek halat-13M.	7,5	400*10	17,5	53/1	13
VF2X	0,59	469	Çift Tambur 4 Halat-6,5M.	4,0	400*10	10,5	53/1	6,5
VF2X	0,59	644	Çift Tambur 4 Halat-6,5M.	5,5	400*10	13,5	53/1	6,5
VF2X	0,59	878	Çift Tambur 4 Halat-6,5M.	7,5	400*10	17,5	53/1	6,5
VF2X	0,59	469	Tek Tambur Tek Halat-26M.	4,0	400*10	10,5	53/1	26
VF2X	0,59	644	Tek Tambur Tek Halat-26M.	5,5	400*10	13,5	53/1	26
VF2X	0,59	878	Tek Tambur Tek Halat-26M.	7,5	400*10	17,5	53/1	26
VF2X	0,59	469	Tek Tambur Çift Halat-13M.	4,0	400*10	10,5	53/1	13
VF2X	0,59	644	Tek Tambur Çift Halat-13M.	5,5	400*10	13,5	53/1	13
VF2X	0,59	878	Tek Tambur Çift Halat-13M.	7,5	400*10	17,5	53/1	13
VF2X	0,59	469	Çift Tambur Tek Halat-26M.	4,0	400*10	10,5	53/1	26
VF2X	0,59	644	Çift Tambur Tek Halat-26M.	5,5	400*10	13,5	53/1	26
VF2X	0,59	878	Çift Tambur Tek Halat-26M.	7,5	400*10	17,5	53/1	26
VF2X	0,59	469	Çift Tambur 4 Halat-13M.	4,0	400*10	10,5	53/1	13
VF2X	0,59	644	Çift Tambur 4 Halat-13M.	5,5	400*10	13,5	53/1	13
VF2X	0,59	878	Çift Tambur 4 Halat-13M.	7,5	400*10	17,5	53/1	13
VF2X	0,59	469	Tek Tambur Tek Halat-40M.	4,0	400*10	10,5	53/1	40
VF2X	0,59	644	Tek Tambur Tek Halat-40M.	5,5	400*10	13,5	53/1	40
VF2X	0,59	878	Tek Tambur Tek Halat-40M.	7,5	400*10	17,5	53/1	40
VF2X	0,59	469	Tek Tambur Çift Halat-20M.	4,0	400*10	10,5	53/1	20
VF2X	0,59	644	Tek Tambur Çift Halat-20M.	5,5	400*10	13,5	53/1	20
VF2X	0,59	878	Tek Tambur Çift Halat-20M.	7,5	400*10	17,5	53/1	20
VF2X	0,59	469	Çift Tambur Tek Halat-40M.	4,0	400*10	10,5	53/1	40
VF2X	0,59	644	Çift Tambur Tek Halat-40M.	5,5	400*10	13,5	53/1	40
VF2X	0,59	878	Çift Tambur Tek Halat-40M.	7,5	400*10	17,5	53/1	40
VF2X	0,59	469	Çift Tambur 4 Halat-20M.	4,0	400*10	10,5	53/1	20
VF2X	0,59	644	Çift Tambur 4 Halat-20M.	5,5	400*10	13,5	53/1	20
VF2X	0,59	878	Çift Tambur 4 Halat-20M.	7,5	400*10	17,5	53/1	20

Ürün	Hız (m/s)	Kapasite (Kg) _Kabin Ağırlığı Dahil		Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)
Product	Speed (m/s)	Capacity (Kg) _Cabin Weight Included		Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)
VF2X	0,67	422	Tek Tambur Tek Halat-13M.	4,0	400*10	10,5	47/1	13
VF2X	0,67	580	Tek Tambur Tek Halat-13M.	5,5	400*10	13,5	47/1	13
VF2X	0,67	791	Tek Tambur Tek Halat-13M.	7,5	400*10	17,5	47/1	13
VF2X	0,67	422	Tek Tambur Çift Halat-6,5M.	4,0	400*10	10,5	47/1	6,5
VF2X	0,67	580	Tek Tambur Çift Halat-6,5M.	5,5	400*10	13,5	47/1	6,5
VF2X	0,67	791	Tek Tambur Çift Halat-6,5M.	7,5	400*10	17,5	47/1	6,5
VF2X	0,67	422	Çift Tambur Tek halat-13M.	4,0	400*10	10,5	47/1	13
VF2X	0,67	580	Çift Tambur Tek halat-13M.	5,5	400*10	13,5	47/1	13
VF2X	0,67	791	Çift Tambur Tek halat-13M.	7,5	400*10	17,5	47/1	13
VF2X	0,67	422	Çift Tambur 4 Halat-6,5M.	4,0	400*10	10,5	47/1	6,5
VF2X	0,67	580	Çift Tambur 4 Halat-6,5M.	5,5	400*10	13,5	47/1	6,5
VF2X	0,67	791	Çift Tambur 4 Halat-6,5M.	7,5	400*10	17,5	47/1	6,5
VF2X	0,67	422	Tek Tambur Tek Halat-26M.	4,0	400*10	10,5	47/1	26
VF2X	0,67	580	Tek Tambur Tek Halat-26M.	5,5	400*10	13,5	47/1	26
VF2X	0,67	791	Tek Tambur Tek Halat-26M.	7,5	400*10	17,5	47/1	26
VF2X	0,67	422	Tek Tambur Çift Halat-13M.	4,0	400*10	10,5	47/1	13
VF2X	0,67	580	Tek Tambur Çift Halat-13M.	5,5	400*10	13,5	47/1	13
VF2X	0,67	791	Tek Tambur Çift Halat-13M.	7,5	400*10	17,5	47/1	13
VF2X	0,67	422	Çift Tambur Tek Halat-26M.	4,0	400*10	10,5	47/1	26
VF2X	0,67	580	Çift Tambur Tek Halat-26M.	5,5	400*10	13,5	47/1	26
VF2X	0,67	791	Çift Tambur Tek Halat-26M.	7,5	400*10	17,5	47/1	26
VF2X	0,67	422	Çift Tambur 4 Halat-13M.	4,0	400*10	10,5	47/1	13
VF2X	0,67	580	Çift Tambur 4 Halat-13M.	5,5	400*10	13,5	47/1	13
VF2X	0,67	791	Çift Tambur 4 Halat-13M.	7,5	400*10	17,5	47/1	13
VF2X	0,67	422	Tek Tambur Tek Halat-40M.	4,0	400*10	10,5	47/1	40
VF2X	0,67	580	Tek Tambur Tek Halat-40M.	5,5	400*10	13,5	47/1	40
VF2X	0,67	791	Tek Tambur Tek Halat-40M.	7,5	400*10	17,5	47/1	40
VF2X	0,67	422	Tek Tambur Çift Halat-20M.	4,0	400*10	10,5	47/1	20
VF2X	0,67	580	Tek Tambur Çift Halat-20M.	5,5	400*10	13,5	47/1	20
VF2X	0,67	791	Tek Tambur Çift Halat-20M.	7,5	400*10	17,5	47/1	20
VF2X	0,67	422	Çift Tambur Tek Halat-40M.	4,0	400*10	10,5	47/1	40
VF2X	0,67	580	Çift Tambur Tek Halat-40M.	5,5	400*10	13,5	47/1	40
VF2X	0,67	791	Çift Tambur Tek Halat-40M.	7,5	400*10	17,5	47/1	40
VF2X	0,67	422	Çift Tambur 4 Halat-20M.	4,0	400*10	10,5	47/1	20
VF2X	0,67	580	Çift Tambur 4 Halat-20M.	5,5	400*10	13,5	47/1	20
VF2X	0,67	791	Çift Tambur 4 Halat-20M.	7,5	400*10	17,5	47/1	20
VF2X	0,83	334	Tek Tambur Tek Halat-13M.	4,0	400*10	10,5	38/1	13
VF2X	0,83	459	Tek Tambur Tek Halat-13M.	5,5	400*10	13,5	38/1	13
VF2X	0,83	626	Tek Tambur Tek Halat-13M.	7,5	400*10	17,5	38/1	13
VF2X	0,83	334	Tek Tambur Çift Halat-6,5M.	4,0	400*10	10,5	38/1	6,5
VF2X	0,83	459	Tek Tambur Çift Halat-6,5M.	5,5	400*10	13,5	38/1	6,5
VF2X	0,83	626	Tek Tambur Çift Halat-6,5M.	7,5	400*10	17,5	38/1	6,5
VF2X	0,83	334	Çift Tambur Tek halat-13M.	4,0	400*10	10,5	38/1	13
VF2X	0,83	459	Çift Tambur Tek halat-13M.	5,5	400*10	13,5	38/1	13
VF2X	0,83	626	Çift Tambur Tek halat-13M.	7,5	400*10	17,5	38/1	13
VF2X	0,83	334	Çift Tambur 4 Halat-6,5M.	4,0	400*10	10,5	38/1	6,5
VF2X	0,83	459	Çift Tambur 4 Halat-6,5M.	5,5	400*10	13,5	38/1	6,5
VF2X	0,83	626	Çift Tambur 4 Halat-6,5M.	7,5	400*10	17,5	38/1	6,5
VF2X	0,83	334	Tek Tambur Tek Halat-26M.	4,0	400*10	10,5	38/1	26
VF2X	0,83	459	Tek Tambur Tek Halat-26M.	5,5	400*10	13,5	38/1	26
VF2X	0,83	626	Tek Tambur Tek Halat-26M.	7,5	400*10	17,5	38/1	26
VF2X	0,83	334	Tek Tambur Çift Halat-13M.	4,0	400*10	10,5	38/1	13
VF2X	0,83	459	Tek Tambur Çift Halat-13M.	5,5	400*10	13,5	38/1	13
VF2X	0,83	626	Tek Tambur Çift Halat-13M.	7,5	400*10	17,5	38/1	13

Ürün	Hız (m/s)	Kapasite (Kg) _Kabin Ağırlığı Dahil		Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)
Product	Speed (m/s)	Capacity (Kg) _Cabin Weight Included		Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)
VF2X	0,83	334	Çift Tambur Tek Halat-26M.	4,0	400*10	10,5	38/1	26
VF2X	0,83	459	Çift Tambur Tek Halat-26M.	5,5	400*10	13,5	38/1	26
VF2X	0,83	626	Çift Tambur Tek Halat-26M.	7,5	400*10	17,5	38/1	26
VF2X	0,83	334	Çift Tambur 4 Halat-13M.	4,0	400*10	10,5	38/1	13
VF2X	0,83	459	Çift Tambur 4 Halat-13M.	5,5	400*10	13,5	38/1	13
VF2X	0,83	626	Çift Tambur 4 Halat-13M.	7,5	400*10	17,5	38/1	13
VF2X	0,83	334	Tek Tambur Tek Halat-40M.	4,0	400*10	10,5	38/1	40
VF2X	0,83	459	Tek Tambur Tek Halat-40M.	5,5	400*10	13,5	38/1	40
VF2X	0,83	626	Tek Tambur Tek Halat-40M.	7,5	400*10	17,5	38/1	40
VF2X	0,83	334	Tek Tambur Çift Halat-20M.	4,0	400*10	10,5	38/1	20
VF2X	0,83	459	Tek Tambur Çift Halat-20M.	5,5	400*10	13,5	38/1	20
VF2X	0,83	626	Tek Tambur Çift Halat-20M.	7,5	400*10	17,5	38/1	20
VF2X	0,83	334	Çift Tambur Tek Halat-40M.	4,0	400*10	10,5	38/1	40
VF2X	0,83	459	Çift Tambur Tek Halat-40M.	5,5	400*10	13,5	38/1	40
VF2X	0,83	626	Çift Tambur Tek Halat-40M.	7,5	400*10	17,5	38/1	40
VF2X	0,83	334	Çift Tambur 4 Halat-20M.	4,0	400*10	10,5	38/1	20
VF2X	0,83	459	Çift Tambur 4 Halat-20M.	5,5	400*10	13,5	38/1	20
VF2X	0,83	626	Çift Tambur 4 Halat-20M.	7,5	400*10	17,5	38/1	20
VF2X	1,31	245	Tek Tambur Tek Halat-13M.	4,0	400*10	10,5	48/2	13
VF2X	1,31	336	Tek Tambur Tek Halat-13M.	5,5	400*10	13,5	48/2	13
VF2X	1,31	459	Tek Tambur Tek Halat-13M.	7,5	400*10	17,5	48/2	13
VF2X	1,31	245	Tek Tambur Çift Halat-6,5M.	4,0	400*10	10,5	48/2	6,5
VF2X	1,31	336	Tek Tambur Çift Halat-6,5M.	5,5	400*10	13,5	48/2	6,5
VF2X	1,31	459	Tek Tambur Çift Halat-6,5M.	7,5	400*10	17,5	48/2	6,5
VF2X	1,31	245	Çift Tambur Tek halat-13M.	4,0	400*10	10,5	48/2	13
VF2X	1,31	336	Çift Tambur Tek halat-13M.	5,5	400*10	13,5	48/2	13
VF2X	1,31	459	Çift Tambur Tek halat-13M.	7,5	400*10	17,5	48/2	13
VF2X	1,31	245	Çift Tambur 4 Halat-6,5M.	4,0	400*10	10,5	48/2	6,5
VF2X	1,31	336	Çift Tambur 4 Halat-6,5M.	5,5	400*10	13,5	48/2	6,5
VF2X	1,31	459	Çift Tambur 4 Halat-6,5M.	7,5	400*10	17,5	48/2	6,5
VF2X	1,31	245	Tek Tambur Tek Halat-26M.	4,0	400*10	10,5	48/2	26
VF2X	1,31	336	Tek Tambur Tek Halat-26M.	5,5	400*10	13,5	48/2	26
VF2X	1,31	459	Tek Tambur Tek Halat-26M.	7,5	400*10	17,5	48/2	26
VF2X	1,31	245	Tek Tambur Çift Halat-13M.	4,0	400*10	10,5	48/2	13
VF2X	1,31	336	Tek Tambur Çift Halat-13M.	5,5	400*10	13,5	48/2	13
VF2X	1,31	459	Tek Tambur Çift Halat-13M.	7,5	400*10	17,5	48/2	13
VF2X	1,31	245	Çift Tambur Tek Halat-26M.	4,0	400*10	10,5	48/2	26
VF2X	1,31	336	Çift Tambur Tek Halat-26M.	5,5	400*10	13,5	48/2	26
VF2X	1,31	459	Çift Tambur Tek Halat-26M.	7,5	400*10	17,5	48/2	26
VF2X	1,31	245	Çift Tambur 4 Halat-13M.	4,0	400*10	10,5	48/2	13
VF2X	1,31	336	Çift Tambur 4 Halat-13M.	5,5	400*10	13,5	48/2	13
VF2X	1,31	459	Çift Tambur 4 Halat-13M.	7,5	400*10	17,5	48/2	13
VF2X	1,31	245	Tek Tambur Tek Halat-40M.	4,0	400*10	10,5	48/2	40
VF2X	1,31	336	Tek Tambur Tek Halat-40M.	5,5	400*10	13,5	48/2	40
VF2X	1,31	459	Tek Tambur Tek Halat-40M.	7,5	400*10	17,5	48/2	40
VF2X	1,31	245	Tek Tambur Çift Halat-20M.	4,0	400*10	10,5	48/2	20
VF2X	1,31	336	Tek Tambur Çift Halat-20M.	5,5	400*10	13,5	48/2	20
VF2X	1,31	459	Tek Tambur Çift Halat-20M.	7,5	400*10	17,5	48/2	20
VF2X	1,31	245	Çift Tambur Tek Halat-40M.	4,0	400*10	10,5	48/2	40
VF2X	1,31	336	Çift Tambur Tek Halat-40M.	5,5	400*10	13,5	48/2	40
VF2X	1,31	459	Çift Tambur Tek Halat-40M.	7,5	400*10	17,5	48/2	40
VF2X	1,31	245	Çift Tambur 4 Halat-20M.	4,0	400*10	10,5	48/2	20
VF2X	1,31	336	Çift Tambur 4 Halat-20M.	5,5	400*10	13,5	48/2	20
VF2X	1,31	459	Çift Tambur 4 Halat-20M.	7,5	400*10	17,5	48/2	20

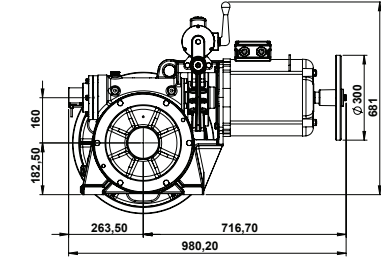

volpi
VF3-9,0 kW
1,0 M-1125 KG



33-51 Metre Seyir Mesafesi

33-51 Meter Travel Distance





1:1 Askı

1:1 Suspension

4500 Kg Statik Yük

4500 Kg Static Load





Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Güç (kW) Power (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Tahvil Oranı Ratio	Seyir Mesafesi (m.) Travel Distance (m.)	Makine Ağırlığı (Kg.) Machine Weigth (Kg.)
VF3	1,00	1125	9,0 kW	500*6*10	19,5	39/1	33	295
VF3	1,00	1440	11,0 kW	500*7*10	22,0	39/1	33	315
VF3	1,00	1500	15 kW	500*7*10	31,0	39/1	33	350
VF3	1,20	600	5,5 kW	620*5*10	14,4	39/1	33	285
VF3	1,20	800	7,5 kW	620*5*10	17,0	39/1	33	295
VF3	1,20	960	9,0 kW	620*6*10	19,5	39/1	33	305
VF3	1,20	1125	11,0 kW	620*6*10	22,0	39/1	33	325
VF3	1,20	1440	15 kW	620*6*10	31,0	39/1	33	365
VF3	1,60	500	5,5 kW	500*5*10	14,4	49/2	33	275
VF3	1,60	680	7,5 kW	500*5*10	17,0	49/2	33	285
VF3	1,60	800	9,0 Kw	500*5*10	19,5	49/2	33	295
VF3	1,60	1000	11,0 kW	500*6*10	22,0	49/2	33	315
VF3	1,60	1300	15 Kw	500*6*10	31,0	49/2	33	350
VF3	2,00	400	5,5 kW	620*5*10	14,4	49/2	33	285
VF3	2,00	550	7,5 kW	620*5*10	17,0	49/2	33	295
VF3	2,00	630	9,0 kW	620*5*10	19,5	49/2	33	305
VF3	2,00	800	11,0 kW	620*5*10	22,0	49/2	33	325
VF3	2,00	1050	15,0 kW	620*6*10	31,0	49/2	33	365
VF3	2,40	320	5,5 kW	500*5*10	14,4	46/3	33	275
VF3	2,40	400	7,5 kW	500*5*10	17,0	46/3	33	285
VF3	2,40	525	9,0 kW	500*5*10	19,5	46/3	33	295
VF3	2,40	640	11,0 kW	500*5*10	22,0	46/3	33	315
VF3	2,40	880	15,0 kW	500*6*10	31,0	46/3	33	350
VF3	3,20	320	7,5 kW	620*5*10	17,0	46/3	33	295
VF3	3,20	450	9,0 kW	620*5*10	19,5	46/3	33	305
VF3	3,20	525	11,0 kW	620*5*10	22,0	46/3	33	325
VF3	3,20	720	15,0 kW	620*5*10	31,0	46/3	33	365

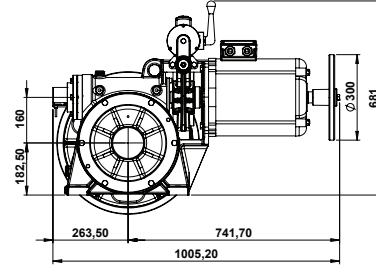

volpi
VF3X-9,0 kW
1 M-1125 KG

33-51 Metre Seyir Mesafesi
33-51 Meter Travel Distance
1:1 Askı
1:1 Suspension
4500 Kg Statik Yük
4500 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)	Makine Ağırlığı (Kg.)
Product	Speed (m/s)	Capacity (Kg)	Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)	Machine Weigth (Kg.)
VF3X	1,00	1125	9,0 kW	500*6*10	21,0	39/1	51	315
VF3X	1,00	1440	11,0 kW	500*7*10	23,0	39/1	51	350
VF3X	1,00	1500	15,0 kW	500*7*10	31,00	39/1	51	355
VF3X	1,20	600	5,5 kW	620*5*10	13,5	39/1	51	295
VF3X	1,20	800	7,5 kW	620*5*10	17,5	39/1	51	305
VF3X	1,20	960	9,0 kW	620*6*10	21,0	39/1	51	325
VF3X	1,20	1125	11,0 kW	620*6*10	23,0	39/1	51	365
VF3X	1,20	1400	15,0 kW	620*6*10	31,00	39/1	51	370
VF3X	1,60	800	9,0 kW	500*5*10	21,0	49/2	51	315
VF3X	1,60	1000	11,0 kW	500*6*10	23,0	49/2	51	350
VF3X	1,60	1300	15,0 kW	500*6*10	31,00	49/2	51	355
VF3X	2,00	400	5,5 kW	620*5*10	13,5	49/2	51	295
VF3X	2,00	550	7,5 kW	620*5*10	17,5	49/2	51	305
VF3X	2,00	630	9,0 kW	620*5*10	21,0	49/2	51	325
VF3X	2,00	800	11,0 kW	620*6*10	23,0	49/2	51	365
VF3X	2,00	1050	15,0 kW	620*6*10	31,0	49/2	51	370
VF3X	2,40	320	5,5 kW	500*5*10	13,5	46/3	51	285
VF3X	2,40	400	7,5 kW	500*5*10	17,5	46/3	51	295
VF3X	2,40	525	9,0 kW	500*5*10	21,0	46/3	51	315
VF3X	2,40	640	11,0 kW	500*5*10	23,0	46/3	51	350
VF3X	2,40	880	15,0 kW	500*6*10	31,0	46/3	51	355
VF3X	3,20	320	7,5 kW	620*5*10	17,5	46/3	51	305
VF3X	3,20	450	9,0 kW	620*5*10	21,0	46/3	51	325
VF3X	3,20	525	11,0 kW	620*5*10	23,0	46/3	51	365
VF3X	3,20	720	15,0 kW	620*5*10	31,0	46/3	51	370
V3X	1,00-0,25	1000	10,5 HP	500*6*10	18,5/15,0	39/1	33	375
V3X	1,00-0,25	1200	12,5 HP	500*6*10	20,5/15,0	39/1	33	385
V3X	1,00-0,25	1350	14 HP	500*6*10	22,5/12,0	39/1	33	395
V3X	1,00-0,25	1400	16 HP	500*7*10	25,0/17,0	39/1	33	405



volpi

VOLPI VF3X 7,5 kW
26M. Çift Tambur Tek Halat

6,5-40 Metre Seyir Mesafesi

6,5-40 Meter Travel Distance

1:1 Askı

1:1 Suspension

3500 Kg Statik Yük

3500 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg) _Kabin Ağırlığı Dahil		Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)
Product	Speed (m/s)	Capacity (Kg) _Cabin Weight Included		Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)
VF3X	0,57	795	Tek Tambur Tek Halat-13M.	5,5	400*10	13,5	55/1	13
VF3X	0,57	1084	Tek Tambur Tek Halat-13M.	7,5	400*10	17,5	55/1	13
VF3X	0,57	1300	Tek Tambur Tek Halat-13M.	9,0	400*10	21,0	55/1	13
VF3X	0,57	1590	Tek Tambur Tek Halat-13M.	11,0	400*10	23,0	55/1	13
VF3X	0,57	2167	Tek Tambur Tek Halat-13M.	15,0	400*10	31,0	55/1	13
VF3X	0,57	795	Tek Tambur Çift Halat-6,5M.	5,5	400*10	13,5	55/1	6,5
VF3X	0,57	1084	Tek Tambur Çift Halat-6,5M.	7,5	400*10	17,5	55/1	6,5
VF3X	0,57	1300	Tek Tambur Çift Halat-6,5M.	9,0	400*10	21,0	55/1	6,5
VF3X	0,57	1590	Tek Tambur Çift Halat-6,5M.	11,0	400*10	23,0	55/1	6,5
VF3X	0,57	2167	Tek Tambur Çift Halat-6,5M.	15,0	400*10	31,0	55/1	6,5
VF3X	0,57	795	Çift Tambur Tek halat-13M.	5,5	400*10	13,5	55/1	13
VF3X	0,57	1084	Çift Tambur Tek halat-13M.	7,5	400*10	17,5	55/1	13
VF3X	0,57	1300	Çift Tambur Tek halat-13M.	9,0	400*10	21,0	55/1	13
VF3X	0,57	1590	Çift Tambur Tek halat-13M.	11,0	400*10	23,0	55/1	13
VF3X	0,57	2167	Çift Tambur Tek halat-13M.	15,0	400*10	31,0	55/1	13
VF3X	0,57	795	Çift Tambur 4 Halat-6,5M.	5,5	400*10	13,5	55/1	6,5
VF3X	0,57	1084	Çift Tambur 4 Halat-6,5M.	7,5	400*10	17,5	55/1	6,5
VF3X	0,57	1300	Çift Tambur 4 Halat-6,5M.	9,0	400*10	21,0	55/1	6,5
VF3X	0,57	1590	Çift Tambur 4 Halat-6,5M.	11,0	400*10	23,0	55/1	6,5
VF3X	0,57	2167	Çift Tambur 4 Halat-6,5M.	15,0	400*10	31,0	55/1	6,5
VF3X	0,57	795	Tek Tambur Tek Halat-26M.	5,5	400*10	13,5	55/1	26
VF3X	0,57	1084	Tek Tambur Tek Halat-26M.	7,5	400*10	17,5	55/1	26
VF3X	0,57	1300	Tek Tambur Tek Halat-26M.	9,0	400*10	21,0	55/1	26
VF3X	0,57	1590	Tek Tambur Tek Halat-26M.	11,0	400*10	23,0	55/1	26
VF3X	0,57	2167	Tek Tambur Tek Halat-26M.	15,0	400*10	31,0	55/1	26
VF3X	0,57	795	Tek Tambur Çift Halat-13M.	5,5	400*10	13,5	55/1	13
VF3X	0,57	1084	Tek Tambur Çift Halat-13M.	7,5	400*10	17,5	55/1	13
VF3X	0,57	1300	Tek Tambur Çift Halat-13M.	9,0	400*10	21,0	55/1	13
VF3X	0,57	1590	Tek Tambur Çift Halat-13M.	11,0	400*10	23,0	55/1	13
VF3X	0,57	2167	Tek Tambur Çift Halat-13M.	15,0	400*10	31,0	55/1	13
VF3X	0,57	795	Çift Tambur Tek Halat-26M.	5,5	400*10	13,5	55/1	26
VF3X	0,57	1084	Çift Tambur Tek Halat-26M.	7,5	400*10	17,5	55/1	26
VF3X	0,57	1300	Çift Tambur Tek Halat-26M.	9,0	400*10	21,0	55/1	26
VF3X	0,57	1590	Çift Tambur Tek Halat-26M.	11,0	400*10	23,0	55/1	26
VF3X	0,57	2167	Çift Tambur Tek Halat-26M.	15,0	400*10	31,0	55/1	26

Ürün	Hız (m/s)	Kapasite (Kg) _Kabin Ağırlığı Dahil		Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)
Product	Speed (m/s)	Capacity (Kg) _Cabin Weight Included		Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)
VF3X	0,57	795	Çift Tambur 4 Halat-13M.	5,5	400*10	13,5	55/1	13
VF3X	0,57	1084	Çift Tambur 4 Halat-13M.	7,5	400*10	17,5	55/1	13
VF3X	0,57	1300	Çift Tambur 4 Halat-13M.	9,0	400*10	21,0	55/1	13
VF3X	0,57	1590	Çift Tambur 4 Halat-13M.	11,0	400*10	23,0	55/1	13
VF3X	0,57	2167	Çift Tambur 4 Halat-13M.	15,0	400*10	31,0	55/1	13
VF3X	0,57	795	Tek Tambur Tek Halat-40M.	5,5	400*10	13,5	55/1	40
VF3X	0,57	1084	Tek Tambur Tek Halat-40M.	7,5	400*10	17,5	55/1	40
VF3X	0,57	1300	Tek Tambur Tek Halat-40M.	9,0	400*10	21,0	55/1	40
VF3X	0,57	1590	Tek Tambur Tek Halat-40M.	11,0	400*10	23,0	55/1	40
VF3X	0,57	2167	Tek Tambur Tek Halat-40M.	15,0	400*10	31,0	55/1	40
VF3X	0,57	795	Tek Tambur Çift Halat-20M.	5,5	400*10	13,5	55/1	20
VF3X	0,57	1084	Tek Tambur Çift Halat-20M.	7,5	400*10	17,5	55/1	20
VF3X	0,57	1300	Tek Tambur Çift Halat-20M.	9,0	400*10	21,0	55/1	20
VF3X	0,57	1590	Tek Tambur Çift Halat-20M.	11,0	400*10	23,0	55/1	20
VF3X	0,57	2167	Tek Tambur Çift Halat-20M.	15,0	400*10	31,0	55/1	20
VF3X	0,57	795	Çift Tambur Tek Halat-40M.	5,5	400*10	13,5	55/1	40
VF3X	0,57	1084	Çift Tambur Tek Halat-40M.	7,5	400*10	17,5	55/1	40
VF3X	0,57	1300	Çift Tambur Tek Halat-40M.	9,0	400*10	21,0	55/1	40
VF3X	0,57	1590	Çift Tambur Tek Halat-40M.	11,0	400*10	23,0	55/1	40
VF3X	0,57	2167	Çift Tambur Tek Halat-40M.	15,0	400*10	31,0	55/1	40
VF3X	0,57	795	Çift Tambur 4 Halat-20M.	5,5	400*10	13,5	55/1	20
VF3X	0,57	1084	Çift Tambur 4 Halat-20M.	7,5	400*10	17,5	55/1	20
VF3X	0,57	1300	Çift Tambur 4 Halat-20M.	9,0	400*10	21,0	55/1	20
VF3X	0,57	1590	Çift Tambur 4 Halat-20M.	11,0	400*10	23,0	55/1	20
VF3X	0,57	2167	Çift Tambur 4 Halat-20M.	15,0	400*10	31,0	55/1	20
VF3X	0,71	605	Tek Tambur Tek Halat-13M.	5,5	400*10	13,5	44/1	13
VF3X	0,71	825	Tek Tambur Tek Halat-13M.	7,5	400*10	17,5	44/1	13
VF3X	0,71	990	Tek Tambur Tek Halat-13M.	9,0	400*10	21,0	44/1	13
VF3X	0,71	1211	Tek Tambur Tek Halat-13M.	11,0	400*10	23,0	44/1	13
VF3X	0,71	1651	Tek Tambur Tek Halat-13M.	15,0	400*10	31,0	44/1	13
VF3X	0,71	605	Tek Tambur Çift Halat-6,5M.	5,5	400*10	13,5	44/1	6,5
VF3X	0,71	825	Tek Tambur Çift Halat-6,5M.	7,5	400*10	17,5	44/1	6,5
VF3X	0,71	990	Tek Tambur Çift Halat-6,5M.	9,0	400*10	21,0	44/1	6,5
VF3X	0,71	1211	Tek Tambur Çift Halat-6,5M.	11,0	400*10	23,0	44/1	6,5
VF3X	0,71	1651	Tek Tambur Çift Halat-6,5M.	15,0	400*10	31,0	44/1	6,5
VF3X	0,71	605	Çift Tambur Tek halat-13M.	5,5	400*10	13,5	44/1	13
VF3X	0,71	825	Çift Tambur Tek halat-13M.	7,5	400*10	17,5	44/1	13
VF3X	0,71	990	Çift Tambur Tek halat-13M.	9,0	400*10	21,0	44/1	13
VF3X	0,71	1211	Çift Tambur Tek halat-13M.	11,0	400*10	23,0	44/1	13
VF3X	0,71	1651	Çift Tambur Tek halat-13M.	15,0	400*10	31,0	44/1	13
VF3X	0,71	605	Çift Tambur 4 Halat-6,5M.	5,5	400*10	13,5	44/1	6,5
VF3X	0,71	825	Çift Tambur 4 Halat-6,5M.	7,5	400*10	17,5	44/1	6,5
VF3X	0,71	990	Çift Tambur 4 Halat-6,5M.	9,0	400*10	21,0	44/1	6,5
VF3X	0,71	1211	Çift Tambur 4 Halat-6,5M.	11,0	400*10	23,0	44/1	6,5
VF3X	0,71	1651	Çift Tambur 4 Halat-6,5M.	15,0	400*10	31,0	44/1	6,5
VF3X	0,71	605	Tek Tambur Tek Halat-26M.	5,5	400*10	13,5	44/1	26
VF3X	0,71	825	Tek Tambur Tek Halat-26M.	7,5	400*10	17,5	44/1	26
VF3X	0,71	990	Tek Tambur Tek Halat-26M.	9,0	400*10	21,0	44/1	26
VF3X	0,71	1211	Tek Tambur Tek Halat-26M.	11,0	400*10	23,0	44/1	26
VF3X	0,71	1651	Tek Tambur Tek Halat-26M.	15,0	400*10	31,0	44/1	26

Ürün	Hız (m/s)	Kapasite (Kg)_Kabin Ağırlığı Dahil		Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)
Product	Speed (m/s)	Capacity (Kg)_Cabin Weight Included		Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)
VF3X	0,71	605	Tek Tambur Çift Halat-13M.	5,5	400*10	13,5	44/1	13
VF3X	0,71	825	Tek Tambur Çift Halat-13M.	7,5	400*10	17,5	44/1	13
VF3X	0,71	990	Tek Tambur Çift Halat-13M.	9,0	400*10	21,0	44/1	13
VF3X	0,71	1211	Tek Tambur Çift Halat-13M.	11,0	400*10	23,0	44/1	13
VF3X	0,71	1651	Tek Tambur Çift Halat-13M.	15,0	400*10	31,0	44/1	13
VF3X	0,71	605	Çift Tambur Tek Halat-26M.	5,5	400*10	13,5	44/1	26
VF3X	0,71	825	Çift Tambur Tek Halat-26M.	7,5	400*10	17,5	44/1	26
VF3X	0,71	990	Çift Tambur Tek Halat-26M.	9,0	400*10	21,0	44/1	26
VF3X	0,71	1211	Çift Tambur Tek Halat-26M.	11,0	400*10	23,0	44/1	26
VF3X	0,71	1651	Çift Tambur Tek Halat-26M.	15,0	400*10	31,0	44/1	26
VF3X	0,71	605	Çift Tambur 4 Halat-13M.	5,5	400*10	13,5	44/1	13
VF3X	0,71	825	Çift Tambur 4 Halat-13M.	7,5	400*10	17,5	44/1	13
VF3X	0,71	990	Çift Tambur 4 Halat-13M.	9,0	400*10	21,0	44/1	13
VF3X	0,71	1211	Çift Tambur 4 Halat-13M.	11,0	400*10	23,0	44/1	13
VF3X	0,71	1651	Çift Tambur 4 Halat-13M.	15,0	400*10	31,0	44/1	13
VF3X	0,71	605	Tek Tambur Tek Halat-40M.	5,5	400*10	13,5	44/1	40
VF3X	0,71	825	Tek Tambur Tek Halat-40M.	7,5	400*10	17,5	44/1	40
VF3X	0,71	990	Tek Tambur Tek Halat-40M.	9,0	400*10	21,0	44/1	40
VF3X	0,71	1211	Tek Tambur Tek Halat-40M.	11,0	400*10	23,0	44/1	40
VF3X	0,71	1651	Tek Tambur Tek Halat-40M.	15,0	400*10	31,0	44/1	40
VF3X	0,71	605	Tek Tambur Çift Halat-20M.	5,5	400*10	13,5	44/1	20
VF3X	0,71	825	Tek Tambur Çift Halat-20M.	7,5	400*10	17,5	44/1	20
VF3X	0,71	990	Tek Tambur Çift Halat-20M.	9,0	400*10	21,0	44/1	20
VF3X	0,71	1211	Tek Tambur Çift Halat-20M.	11,0	400*10	23,0	44/1	20
VF3X	0,71	1651	Tek Tambur Çift Halat-20M.	15,0	400*10	31,0	44/1	20
VF3X	0,71	605	Çift Tambur Tek Halat-40M.	5,5	400*10	13,5	44/1	40
VF3X	0,71	825	Çift Tambur Tek Halat-40M.	7,5	400*10	17,5	44/1	40
VF3X	0,71	990	Çift Tambur Tek Halat-40M.	9,0	400*10	21,0	44/1	40
VF3X	0,71	1211	Çift Tambur Tek Halat-40M.	11,0	400*10	23,0	44/1	40
VF3X	0,71	1651	Çift Tambur Tek Halat-40M.	15,0	400*10	31,0	44/1	40
VF3X	0,71	605	Çift Tambur 4 Halat-20M.	5,5	400*10	13,5	44/1	20
VF3X	0,71	825	Çift Tambur 4 Halat-20M.	7,5	400*10	17,5	44/1	20
VF3X	0,71	990	Çift Tambur 4 Halat-20M.	9,0	400*10	21,0	44/1	20
VF3X	0,71	1211	Çift Tambur 4 Halat-20M.	11,0	400*10	23,0	44/1	20
VF3X	0,71	1651	Çift Tambur 4 Halat-20M.	15,0	400*10	31,0	44/1	20
VF3X	0,81	547	Tek Tambur Tek Halat-13M.	5,5	400*10	13,5	39/1	13
VF3X	0,81	747	Tek Tambur Tek Halat-13M.	7,5	400*10	17,5	39/1	13
VF3X	0,81	896	Tek Tambur Tek Halat-13M.	9,0	400*10	21,0	39/1	13
VF3X	0,81	1095	Tek Tambur Tek Halat-13M.	11,0	400*10	23,0	39/1	13
VF3X	0,81	1493	Tek Tambur Tek Halat-13M.	15,0	400*10	31,0	39/1	13
VF3X	0,81	547	Tek Tambur Çift Halat-6,5M.	5,5	400*10	13,5	39/1	6,5
VF3X	0,81	747	Tek Tambur Çift Halat-6,5M.	7,5	400*10	17,5	39/1	6,5
VF3X	0,81	896	Tek Tambur Çift Halat-6,5M.	9,0	400*10	21,0	39/1	6,5
VF3X	0,81	1095	Tek Tambur Çift Halat-6,5M.	11,0	400*10	23,0	39/1	6,5
VF3X	0,81	1493	Tek Tambur Çift Halat-6,5M.	15,0	400*10	31,0	39/1	6,5
VF3X	0,81	547	Çift Tambur Tek halat-13M.	5,5	400*10	13,5	39/1	13
VF3X	0,81	747	Çift Tambur Tek halat-13M.	7,5	400*10	17,5	39/1	13
VF3X	0,81	896	Çift Tambur Tek halat-13M.	9,0	400*10	21,0	39/1	13
VF3X	0,81	1095	Çift Tambur Tek halat-13M.	11,0	400*10	23,0	39/1	13
VF3X	0,81	1493	Çift Tambur Tek halat-13M.	15,0	400*10	31,0	39/1	13
VF3X	0,81	547	Çift Tambur 4 Halat-6,5M.	5,5	400*10	13,5	39/1	6,5
VF3X	0,81	747	Çift Tambur 4 Halat-6,5M.	7,5	400*10	17,5	39/1	6,5
VF3X	0,81	896	Çift Tambur 4 Halat-6,5M.	9,0	400*10	21,0	39/1	6,5

Ürün	Hız (m/s)	Kapasite (Kg) _Kabin Ağırlığı Dahil	Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)	
Product	Speed (m/s)	Capacity (Kg) _Cabin Weight Included	Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)	
VF3X	0,81	1095	Çift Tambur 4 Halat-6,5M.	11,0	400*10	23,0	39/1	6,5
VF3X	0,81	1493	Çift Tambur 4 Halat-6,5M.	15,0	400*10	31,0	39/1	6,5
VF3X	0,81	547	Tek Tambur Tek Halat-26M.	5,5	400*10	13,5	39/1	26
VF3X	0,81	747	Tek Tambur Tek Halat-26M.	7,5	400*10	17,5	39/1	26
VF3X	0,81	896	Tek Tambur Tek Halat-26M.	9,0	400*10	21,0	39/1	26
VF3X	0,81	1095	Tek Tambur Tek Halat-26M.	11,0	400*10	23,0	39/1	26
VF3X	0,81	1493	Tek Tambur Tek Halat-26M.	15,0	400*10	31,0	39/1	26
VF3X	0,81	547	Tek Tambur Çift Halat-13M.	5,5	400*10	13,5	39/1	13
VF3X	0,81	747	Tek Tambur Çift Halat-13M.	7,5	400*10	17,5	39/1	13
VF3X	0,81	896	Tek Tambur Çift Halat-13M.	9,0	400*10	21,0	39/1	13
VF3X	0,81	1095	Tek Tambur Çift Halat-13M.	11,0	400*10	23,0	39/1	13
VF3X	0,81	1493	Tek Tambur Çift Halat-13M.	15,0	400*10	31,0	39/1	13
VF3X	0,81	547	Çift Tambur Tek Halat-26M.	5,5	400*10	13,5	39/1	26
VF3X	0,81	747	Çift Tambur Tek Halat-26M.	7,5	400*10	17,5	39/1	26
VF3X	0,81	896	Çift Tambur Tek Halat-26M.	9,0	400*10	21,0	39/1	26
VF3X	0,81	1095	Çift Tambur Tek Halat-26M.	11,0	400*10	23,0	39/1	26
VF3X	0,81	1493	Çift Tambur Tek Halat-26M.	15,0	400*10	31,0	39/1	26
VF3X	0,81	547	Çift Tambur 4 Halat-13M.	5,5	400*10	13,5	39/1	13
VF3X	0,81	747	Çift Tambur 4 Halat-13M.	7,5	400*10	17,5	39/1	13
VF3X	0,81	896	Çift Tambur 4 Halat-13M.	9,0	400*10	21,0	39/1	13
VF3X	0,81	1095	Çift Tambur 4 Halat-13M.	11,0	400*10	23,0	39/1	13
VF3X	0,81	1493	Çift Tambur 4 Halat-13M.	15,0	400*10	31,0	39/1	13
VF3X	0,81	547	Tek Tambur Tek Halat-40M.	5,5	400*10	13,5	39/1	40
VF3X	0,81	747	Tek Tambur Tek Halat-40M.	7,5	400*10	17,5	39/1	40
VF3X	0,81	896	Tek Tambur Tek Halat-40M.	9,0	400*10	21,0	39/1	40
VF3X	0,81	1095	Tek Tambur Tek Halat-40M.	11,0	400*10	23,0	39/1	40
VF3X	0,81	1493	Tek Tambur Tek Halat-40M.	15,0	400*10	31,0	39/1	40
VF3X	0,81	547	Tek Tambur Çift Halat-20M.	5,5	400*10	13,5	39/1	20
VF3X	0,81	747	Tek Tambur Çift Halat-20M.	7,5	400*10	17,5	39/1	20
VF3X	0,81	896	Tek Tambur Çift Halat-20M.	9,0	400*10	21,0	39/1	20
VF3X	0,81	1095	Tek Tambur Çift Halat-20M.	11,0	400*10	23,0	39/1	20
VF3X	0,81	1493	Tek Tambur Çift Halat-20M.	15,0	400*10	31,0	39/1	20
VF3X	0,81	547	Çift Tambur Tek Halat-40M.	5,5	400*10	13,5	39/1	40
VF3X	0,81	747	Çift Tambur Tek Halat-40M.	7,5	400*10	17,5	39/1	40
VF3X	0,81	896	Çift Tambur Tek Halat-40M.	9,0	400*10	21,0	39/1	40
VF3X	0,81	1095	Çift Tambur Tek Halat-40M.	11,0	400*10	23,0	39/1	40
VF3X	0,81	1493	Çift Tambur Tek Halat-40M.	15,0	400*10	31,0	39/1	40
VF3X	0,81	547	Çift Tambur 4 Halat-20M.	5,5	400*10	13,5	39/1	20
VF3X	0,81	747	Çift Tambur 4 Halat-20M.	7,5	400*10	17,5	39/1	20
VF3X	0,81	896	Çift Tambur 4 Halat-20M.	9,0	400*10	21,0	39/1	20
VF3X	0,81	1095	Çift Tambur 4 Halat-20M.	11,0	400*10	23,0	39/1	20
VF3X	0,81	1493	Çift Tambur 4 Halat-20M.	15,0	400*10	31,0	39/1	20
VF3X	1,28	376	Tek Tambur Tek Halat-13M.	5,5	400*10	13,5	49/2	13
VF3X	1,28	513	Tek Tambur Tek Halat-13M.	7,5	400*10	17,5	49/2	13
VF3X	1,28	616	Tek Tambur Tek Halat-13M.	9,0	400*10	21,0	49/2	13
VF3X	1,28	753	Tek Tambur Tek Halat-13M.	11,0	400*10	23,0	49/2	13
VF3X	1,28	1027	Tek Tambur Tek Halat-13M.	15,0	400*10	31,0	49/2	13
VF3X	1,28	376	Tek Tambur Çift Halat-6,5M.	5,5	400*10	13,5	49/2	6,5
VF3X	1,28	513	Tek Tambur Çift Halat-6,5M.	7,5	400*10	17,5	49/2	6,5
VF3X	1,28	616	Tek Tambur Çift Halat-6,5M.	9,0	400*10	21,0	49/2	6,5
VF3X	1,28	753	Tek Tambur Çift Halat-6,5M.	11,0	400*10	23,0	49/2	6,5
VF3X	1,28	1027	Tek Tambur Çift Halat-6,5M.	15,0	400*10	31,0	49/2	6,5
VF3X	1,28	376	Çift Tambur Tek halat-13M.	5,5	400*10	13,5	49/2	13

Ürün	Hız (m/s)	Kapasite (Kg) _Kabin Ağırlığı Dahil		Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)
Product	Speed (m/s)	Capacity (Kg) _Cabin Weight Included		Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)
VF3X	1,28	513	Çift Tambur Tek halat-13M.	7,5	400*10	17,5	49/2	13
VF3X	1,28	616	Çift Tambur Tek halat-13M.	9,0	400*10	21,0	49/2	13
VF3X	1,28	753	Çift Tambur Tek halat-13M.	11,0	400*10	23,0	49/2	13
VF3X	1,28	1027	Çift Tambur Tek halat-13M.	15,0	400*10	31,0	49/2	13
VF3X	1,28	376	Çift Tambur 4 Halat-6,5M.	5,5	400*10	13,5	49/2	6,5
VF3X	1,28	513	Çift Tambur 4 Halat-6,5M.	7,5	400*10	17,5	49/2	6,5
VF3X	1,28	616	Çift Tambur 4 Halat-6,5M.	9,0	400*10	21,0	49/2	6,5
VF3X	1,28	753	Çift Tambur 4 Halat-6,5M.	11,0	400*10	23,0	49/2	6,5
VF3X	1,28	1027	Çift Tambur 4 Halat-6,5M.	15,0	400*10	31,0	49/2	6,5
VF3X	1,28	376	Tek Tambur Tek Halat-26M.	5,5	400*10	13,5	49/2	26
VF3X	1,28	513	Tek Tambur Tek Halat-26M.	7,5	400*10	17,5	49/2	26
VF3X	1,28	616	Tek Tambur Tek Halat-26M.	9,0	400*10	21,0	49/2	26
VF3X	1,28	753	Tek Tambur Tek Halat-26M.	11,0	400*10	23,0	49/2	26
VF3X	1,28	1027	Tek Tambur Tek Halat-26M.	15,0	400*10	31,0	49/2	26
VF3X	1,28	376	Tek Tambur Çift Halat-13M.	5,5	400*10	13,5	49/2	13
VF3X	1,28	513	Tek Tambur Çift Halat-13M.	7,5	400*10	17,5	49/2	13
VF3X	1,28	616	Tek Tambur Çift Halat-13M.	9,0	400*10	21,0	49/2	13
VF3X	1,28	753	Tek Tambur Çift Halat-13M.	11,0	400*10	23,0	49/2	13
VF3X	1,28	1027	Tek Tambur Çift Halat-13M.	15,0	400*10	31,0	49/2	13
VF3X	1,28	376	Çift Tambur Tek Halat-26M.	5,5	400*10	13,5	49/2	26
VF3X	1,28	513	Çift Tambur Tek Halat-26M.	7,5	400*10	17,5	49/2	26
VF3X	1,28	616	Çift Tambur Tek Halat-26M.	9,0	400*10	21,0	49/2	26
VF3X	1,28	753	Çift Tambur Tek Halat-26M.	11,0	400*10	23,0	49/2	26
VF3X	1,28	1027	Çift Tambur Tek Halat-26M.	15,0	400*10	31,0	49/2	26
VF3X	1,28	376	Çift Tambur 4 Halat-13M.	5,5	400*10	13,5	49/2	13
VF3X	1,28	513	Çift Tambur 4 Halat-13M.	7,5	400*10	17,5	49/2	13
VF3X	1,28	616	Çift Tambur 4 Halat-13M.	9,0	400*10	21,0	49/2	13
VF3X	1,28	753	Çift Tambur 4 Halat-13M.	11,0	400*10	23,0	49/2	13
VF3X	1,28	1027	Çift Tambur 4 Halat-13M.	15,0	400*10	31,0	49/2	13
VF3X	1,28	376	Tek Tambur Tek Halat-40M.	5,5	400*10	13,5	49/2	40
VF3X	1,28	513	Tek Tambur Tek Halat-40M.	7,5	400*10	17,5	49/2	40
VF3X	1,28	616	Tek Tambur Tek Halat-40M.	9,0	400*10	21,0	49/2	40
VF3X	1,28	753	Tek Tambur Tek Halat-40M.	11,0	400*10	23,0	49/2	40
VF3X	1,28	1027	Tek Tambur Tek Halat-40M.	15,0	400*10	31,0	49/2	40
VF3X	1,28	376	Tek Tambur Çift Halat-20M.	5,5	400*10	13,5	49/2	20
VF3X	1,28	513	Tek Tambur Çift Halat-20M.	7,5	400*10	17,5	49/2	20
VF3X	1,28	616	Tek Tambur Çift Halat-20M.	9,0	400*10	21,0	49/2	20
VF3X	1,28	753	Tek Tambur Çift Halat-20M.	11,0	400*10	23,0	49/2	20
VF3X	1,28	1027	Tek Tambur Çift Halat-20M.	15,0	400*10	31,0	49/2	20
VF3X	1,28	376	Çift Tambur Tek Halat-40M.	5,5	400*10	13,5	49/2	40
VF3X	1,28	513	Çift Tambur Tek Halat-40M.	7,5	400*10	17,5	49/2	40
VF3X	1,28	616	Çift Tambur Tek Halat-40M.	9,0	400*10	21,0	49/2	40
VF3X	1,28	753	Çift Tambur Tek Halat-40M.	11,0	400*10	23,0	49/2	40
VF3X	1,28	1027	Çift Tambur Tek Halat-40M.	15,0	400*10	31,0	49/2	40
VF3X	1,28	376	Çift Tambur 4 Halat-20M.	5,5	400*10	13,5	49/2	20
VF3X	1,28	513	Çift Tambur 4 Halat-20M.	7,5	400*10	17,5	49/2	20
VF3X	1,28	616	Çift Tambur 4 Halat-20M.	9,0	400*10	21,0	49/2	20
VF3X	1,28	753	Çift Tambur 4 Halat-20M.	11,0	400*10	23,0	49/2	20
VF3X	1,28	1027	Çift Tambur 4 Halat-20M.	15,0	400*10	31,0	49/2	20

**33 Metre Seyir Mesafesi**





33 Meter Travel Distance

1:1 Askı

1:1 Suspension


1500 Kg Statik Yük

1500 Kg Static Load

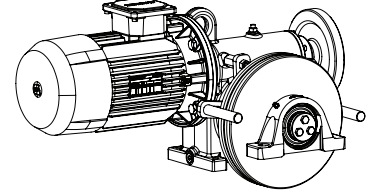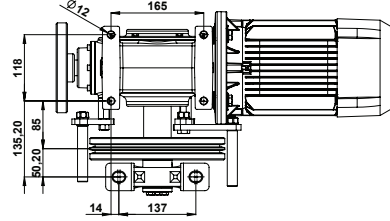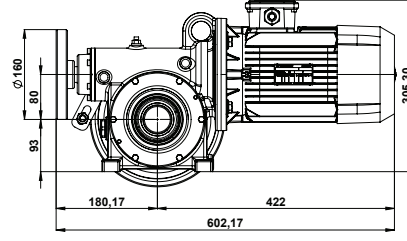


Z 40-1,5 HP

Ürün	Hız (m/s)	Kapasite (Kg)	Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)	Makine Ağırlığı (Kg.)
Product	Speed (m/s)	Capacity (Kg)	Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)	Machine Weigth (Kg.)
Z40	0,27	150	1,5HP/1,1KW	240*2*6,5	2,9	41/1	33	50

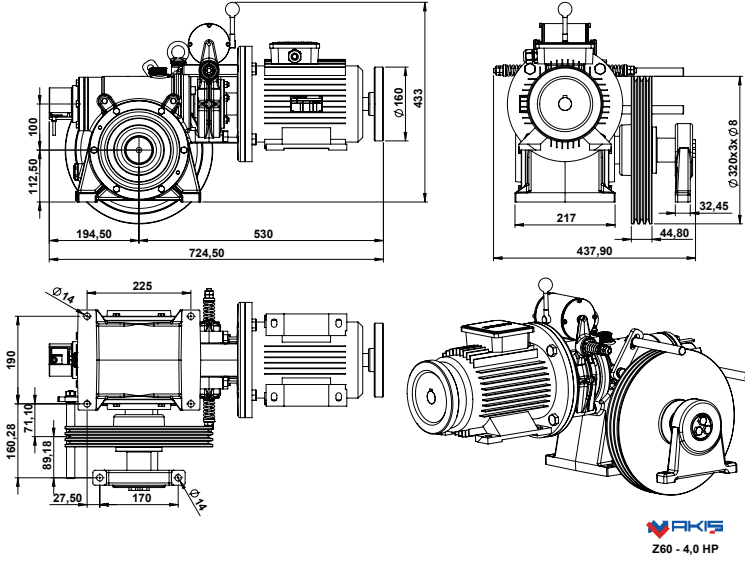

33 Metre Seyir Mesafesi

33 Meter Travel Distance


1:1 Askı

1:1 Suspension

2500 Kg Statik Yük

2500 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)	Makine Ağırlığı (Kg.)
Product	Speed (m/s)	Capacity (Kg)	Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)	Machine Weigth (Kg.)
ZF60	1,00	320	5,44 HP / 4,0 kW	400*4*10	8,4	62/2	33	130
Z60	0,58	400	4,0 HP / 3,0 kW	400*4*10	6,7	54/1	33	125
Z60	0,46	500	4,0 HP / 3,0 kW	320*3*8	6,7	54/1	33	120

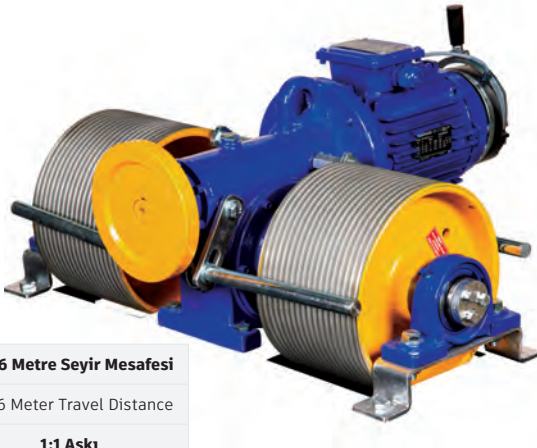

13-26 Metre Seyir Mesafesi





13-26 Meter Travel Distance

1:1 Ask1

1:1 Suspension

1500 Kg Statik Yük

1500 Kg Static Load



Ürün	Hız (m/s)	Kapasite (Kg)_Kabin Ağırlığı Dahil		Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)	Makine Ağırlığı (kg)
Product	Speed (m/s)	Capacity (Kg)_Cabin Weight Included		Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)	Machine Weigth (kg)
Z40	0,27	100	13M. Tek Tamburlu	1,5HP/1,1KW	240*6,5 Tambur	2,9	41/1	13	55
Z40	0,27	100	26M. Tek Tamburlu	1,5HP/1,1KW	240*6,5 Tambur	2,9	41/1	26	60
Z40	0,27	100	13M. Çift Tamburlu	1,5HP/1,1KW	240*6,5 Tambur	2,9	41/1	13	60
Z40	0,27	100	26M. Çift Tamburlu	1,5HP/1,1KW	240*6,5 Tambur	2,9	41/1	26	65



13-26 Metre Seyir Mesafesi





13-26 Meter Travel Distance

1:1 Ask1





1:1 Suspension

2500 Kg Statik Yük

2500 Kg Static Load



Ürün	Hız (m/s)	Kapasite (Kg) _Kabin Ağırlığı Dahil		Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)	Makine Ağırlığı (kg)
Product	Speed (m/s)	Capacity (Kg) _Cabin Weight Included		Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)	Machine Weighth (kg)
Z60	0,46	250	13M. Tek Tamburlu	4HP/3KW	320*8 Tambur	6,7	54/1	13	125
Z60	0,46	250	26M. Tek Tamburlu	4HP/3KW	320*8 Tambur	6,7	54/1	26	135
Z60	0,46	250	13M. Çift Tamburlu	4HP/3KW	320*8 Tambur	6,7	54/1	13	140
Z60	0,46	250	26M. Çift Tamburlu	4HP/3KW	320*8 Tambur	6,7	54/1	26	150

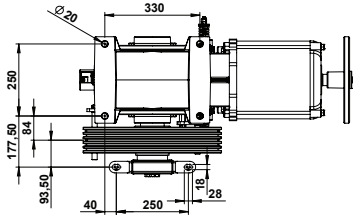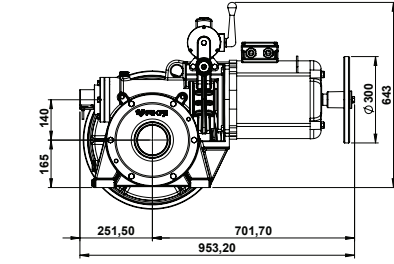
33-51 Metre Seyir Mesafesi

33-51 Meter Travel Distance



1:1 Askı

1:1 Suspension

3500 Kg Statik Yük

3500 Kg Static Load

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Güç (kW) Power (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Tahvil Oranı Ratio	Seyir Mesafesi (m.) Travel Distance (m.)	Makine Ağırlığı (Kg.) Machine Weight (Kg.)
ZF82	1,00	450	4,0 kW	480*5*10	10,50	38/1	51	285
ZF82	1,00	630	5,5 kW	480*5*10	13,50	38/1	51	290
ZF82	1,00	800	7,5 kW	480*5*10	17,50	38/1	51	310
ZF82	1,60	320	4,0 kW	480*4*10	10,50	48/2	51	285
ZF82	1,60	450	5,5 kW	480*5*10	13,50	48/2	51	290
ZF82	1,60	630	7,5 kW	480*5*10	17,50	48/2	51	310
Z82	1,00-0,25	450	5,5 HP	480*5*10	9,5/6,5	38/1	33	315
Z82	1,00-0,25	525	6,2 HP	480*5*10	11,5/6,8	38/1	33	325
Z82	1,00-0,25	630	8,2 HP	480*5*10	14,0/8,5	38/1	33	340
Z82	1,00-0,25	960	10,5 HP	480*5*10	18,5/11,5	38/1	33	350

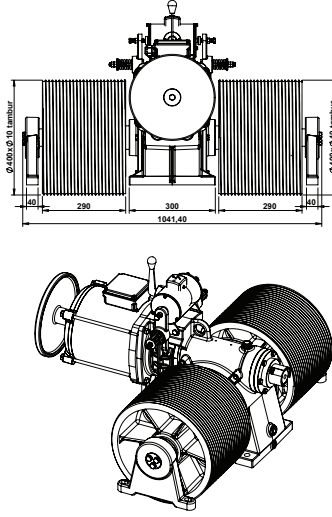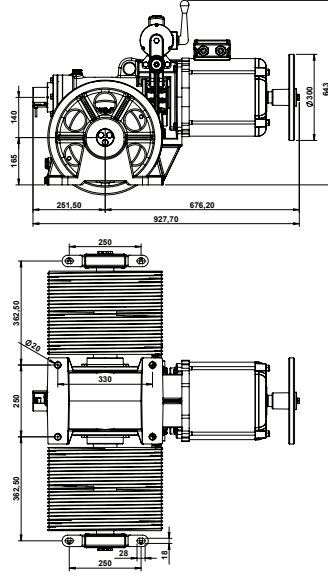

AKIS
ZF 82-7,5 kW
26M. ÇİFT TAMBUR TEK HALAT

6,5-40 Metre Seyir Mesafesi

6,5-40 Meter Travel Distance

1:1 Askı

1:1 Suspension


3500 Kg Statik Yük

3500 Kg Static Load

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) _Kabin Ağırlığı Dahil Capacity (Kg) _Cabin Weight Included		Güç (kW) Power (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Tahvil Oranı Ratio	Seyir Mesafesi (m.) Travel Distance (m.)
ZF 82	0,59	469	Tek Tambur Tek Halat-13M.	4,0	400*10	10,5	53/1	13
ZF 82	0,59	644	Tek Tambur Tek Halat-13M.	5,5	400*10	13,5	53/1	13
ZF 82	0,59	878	Tek Tambur Tek Halat-13M.	7,5	400*10	17,5	53/1	13
ZF 82	0,59	469	Tek Tambur Çift Halat-6,5M.	4,0	400*10	10,5	53/1	6,5
ZF 82	0,59	644	Tek Tambur Çift Halat-6,5M.	5,5	400*10	13,5	53/1	6,5
ZF 82	0,59	878	Tek Tambur Çift Halat-6,5M.	7,5	400*10	17,5	53/1	6,5
ZF 82	0,59	469	Çift Tambur Tek halat-13M.	4,0	400*10	10,5	53/1	13
ZF 82	0,59	644	Çift Tambur Tek halat-13M.	5,5	400*10	13,5	53/1	13
ZF 82	0,59	878	Çift Tambur Tek halat-13M.	7,5	400*10	17,5	53/1	13
ZF 82	0,59	469	Çift Tambur 4 Halat-6,5M.	4,0	400*10	10,5	53/1	6,5
ZF 82	0,59	644	Çift Tambur 4 Halat-6,5M.	5,5	400*10	13,5	53/1	6,5
ZF 82	0,59	878	Çift Tambur 4 Halat-6,5M.	7,5	400*10	17,5	53/1	6,5
ZF 82	0,59	469	Tek Tambur Tek Halat-26M.	4,0	400*10	10,5	53/1	26
ZF 82	0,59	644	Tek Tambur Tek Halat-26M.	5,5	400*10	13,5	53/1	26
ZF 82	0,59	878	Tek Tambur Tek Halat-26M.	7,5	400*10	17,5	53/1	26
ZF 82	0,59	469	Tek Tambur Çift Halat-13M.	4,0	400*10	10,5	53/1	13
ZF 82	0,59	644	Tek Tambur Çift Halat-13M.	5,5	400*10	13,5	53/1	13
ZF 82	0,59	878	Tek Tambur Çift Halat-13M.	7,5	400*10	17,5	53/1	13
ZF 82	0,59	469	Çift Tambur Tek Halat-26M.	4,0	400*10	10,5	53/1	26
ZF 82	0,59	644	Çift Tambur Tek Halat-26M.	5,5	400*10	13,5	53/1	26
ZF 82	0,59	878	Çift Tambur Tek Halat-26M.	7,5	400*10	17,5	53/1	26
ZF 82	0,59	469	Çift Tambur 4 Halat-13M.	4,0	400*10	10,5	53/1	13
ZF 82	0,59	644	Çift Tambur 4 Halat-13M.	5,5	400*10	13,5	53/1	13
ZF 82	0,59	878	Çift Tambur 4 Halat-13M.	7,5	400*10	17,5	53/1	13
ZF 82	0,59	469	Tek Tambur Tek Halat-40M.	4,0	400*10	10,5	53/1	40
ZF 82	0,59	644	Tek Tambur Tek Halat-40M.	5,5	400*10	13,5	53/1	40
ZF 82	0,59	878	Tek Tambur Tek Halat-40M.	7,5	400*10	17,5	53/1	40
ZF 82	0,59	469	Tek Tambur Çift Halat-20M.	4,0	400*10	10,5	53/1	20
ZF 82	0,59	644	Tek Tambur Çift Halat-20M.	5,5	400*10	13,5	53/1	20
ZF 82	0,59	878	Tek Tambur Çift Halat-20M.	7,5	400*10	17,5	53/1	20
ZF 82	0,59	469	Çift Tambur Tek Halat-40M.	4,0	400*10	10,5	53/1	40
ZF 82	0,59	644	Çift Tambur Tek Halat-40M.	5,5	400*10	13,5	53/1	40
ZF 82	0,59	878	Çift Tambur Tek Halat-40M.	7,5	400*10	17,5	53/1	40
ZF 82	0,59	469	Çift Tambur 4 Halat-20M.	4,0	400*10	10,5	53/1	20
ZF 82	0,59	644	Çift Tambur 4 Halat-20M.	5,5	400*10	13,5	53/1	20
ZF 82	0,59	878	Çift Tambur 4 Halat-20M.	7,5	400*10	17,5	53/1	20

Ürün	Hız (m/s)	Kapasite (Kg)_Kabin Ağırlığı Dahil		Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)
Product	Speed (m/s)	Capacity (Kg)_Cabin Weight Included		Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)
ZF 82	0,67	422	Tek Tambur Tek Halat-13M.	4,0	400*10	10,5	47/1	13
ZF 82	0,67	580	Tek Tambur Tek Halat-13M.	5,5	400*10	13,5	47/1	13
ZF 82	0,67	791	Tek Tambur Tek Halat-13M.	7,5	400*10	17,5	47/1	13
ZF 82	0,67	422	Tek Tambur Çift Halat-6,5M.	4,0	400*10	10,5	47/1	6,5
ZF 82	0,67	580	Tek Tambur Çift Halat-6,5M.	5,5	400*10	13,5	47/1	6,5
ZF 82	0,67	791	Tek Tambur Çift Halat-6,5M.	7,5	400*10	17,5	47/1	6,5
ZF 82	0,67	422	Çift Tambur Tek halat-13M.	4,0	400*10	10,5	47/1	13
ZF 82	0,67	580	Çift Tambur Tek halat-13M.	5,5	400*10	13,5	47/1	13
ZF 82	0,67	791	Çift Tambur Tek halat-13M.	7,5	400*10	17,5	47/1	13
ZF 82	0,67	422	Çift Tambur 4 Halat-6,5M.	4,0	400*10	10,5	47/1	6,5
ZF 82	0,67	580	Çift Tambur 4 Halat-6,5M.	5,5	400*10	13,5	47/1	6,5
ZF 82	0,67	791	Çift Tambur 4 Halat-6,5M.	7,5	400*10	17,5	47/1	6,5
ZF 82	0,67	422	Tek Tambur Tek Halat-26M.	4,0	400*10	10,5	47/1	26
ZF 82	0,67	580	Tek Tambur Tek Halat-26M.	5,5	400*10	13,5	47/1	26
ZF 82	0,67	791	Tek Tambur Tek Halat-26M.	7,5	400*10	17,5	47/1	26
ZF 82	0,67	422	Tek Tambur Çift Halat-13M.	4,0	400*10	10,5	47/1	13
ZF 82	0,67	580	Tek Tambur Çift Halat-13M.	5,5	400*10	13,5	47/1	13
ZF 82	0,67	791	Tek Tambur Çift Halat-13M.	7,5	400*10	17,5	47/1	13
ZF 82	0,67	422	Çift Tambur Tek Halat-26M.	4,0	400*10	10,5	47/1	26
ZF 82	0,67	580	Çift Tambur Tek Halat-26M.	5,5	400*10	13,5	47/1	26
ZF 82	0,67	791	Çift Tambur Tek Halat-26M.	7,5	400*10	17,5	47/1	26
ZF 82	0,67	422	Çift Tambur 4 Halat-13M.	4,0	400*10	10,5	47/1	13
ZF 82	0,67	580	Çift Tambur 4 Halat-13M.	5,5	400*10	13,5	47/1	13
ZF 82	0,67	791	Çift Tambur 4 Halat-13M.	7,5	400*10	17,5	47/1	13
ZF 82	0,67	422	Tek Tambur Tek Halat-40M.	4,0	400*10	10,5	47/1	40
ZF 82	0,67	580	Tek Tambur Tek Halat-40M.	5,5	400*10	13,5	47/1	40
ZF 82	0,67	791	Tek Tambur Tek Halat-40M.	7,5	400*10	17,5	47/1	40
ZF 82	0,67	422	Tek Tambur Çift Halat-20M.	4,0	400*10	10,5	47/1	20
ZF 82	0,67	580	Tek Tambur Çift Halat-20M.	5,5	400*10	13,5	47/1	20
ZF 82	0,67	791	Tek Tambur Çift Halat-20M.	7,5	400*10	17,5	47/1	20
ZF 82	0,67	422	Çift Tambur Tek Halat-40M.	4,0	400*10	10,5	47/1	40
ZF 82	0,67	580	Çift Tambur Tek Halat-40M.	5,5	400*10	13,5	47/1	40
ZF 82	0,67	791	Çift Tambur Tek Halat-40M.	7,5	400*10	17,5	47/1	40
ZF 82	0,67	422	Çift Tambur 4 Halat-20M.	4,0	400*10	10,5	47/1	20
ZF 82	0,67	580	Çift Tambur 4 Halat-20M.	5,5	400*10	13,5	47/1	20
ZF 82	0,67	791	Çift Tambur 4 Halat-20M.	7,5	400*10	17,5	47/1	20
ZF 82	0,83	334	Tek Tambur Tek Halat-13M.	4,0	400*10	10,5	38/1	13
ZF 82	0,83	459	Tek Tambur Tek Halat-13M.	5,5	400*10	13,5	38/1	13
ZF 82	0,83	626	Tek Tambur Tek Halat-13M.	7,5	400*10	17,5	38/1	13
ZF 82	0,83	334	Tek Tambur Çift Halat-6,5M.	4,0	400*10	10,5	38/1	6,5
ZF 82	0,83	459	Tek Tambur Çift Halat-6,5M.	5,5	400*10	13,5	38/1	6,5
ZF 82	0,83	626	Tek Tambur Çift Halat-6,5M.	7,5	400*10	17,5	38/1	6,5
ZF 82	0,83	334	Çift Tambur Tek halat-13M.	4,0	400*10	10,5	38/1	13
ZF 82	0,83	459	Çift Tambur Tek halat-13M.	5,5	400*10	13,5	38/1	13
ZF 82	0,83	626	Çift Tambur Tek halat-13M.	7,5	400*10	17,5	38/1	13
ZF 82	0,83	334	Çift Tambur 4 Halat-6,5M.	4,0	400*10	10,5	38/1	6,5
ZF 82	0,83	459	Çift Tambur 4 Halat-6,5M.	5,5	400*10	13,5	38/1	6,5
ZF 82	0,83	626	Çift Tambur 4 Halat-6,5M.	7,5	400*10	17,5	38/1	6,5
ZF 82	0,83	334	Tek Tambur Tek Halat-26M.	4,0	400*10	10,5	38/1	26
ZF 82	0,83	459	Tek Tambur Tek Halat-26M.	5,5	400*10	13,5	38/1	26
ZF 82	0,83	626	Tek Tambur Tek Halat-26M.	7,5	400*10	17,5	38/1	26
ZF 82	0,83	334	Tek Tambur Çift Halat-13M.	4,0	400*10	10,5	38/1	13
ZF 82	0,83	459	Tek Tambur Çift Halat-13M.	5,5	400*10	13,5	38/1	13
ZF 82	0,83	626	Tek Tambur Çift Halat-13M.	7,5	400*10	17,5	38/1	13

Ürün	Hız (m/s)	Kapasite (Kg) _Kabin Ağırlığı Dahil		Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)
Product	Speed (m/s)	Capacity (Kg) _Cabin Weight Included		Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)
ZF 82	0,83	334	Çift Tambur Tek Halat-26M.	4,0	400*10	10,5	38/1	26
ZF 82	0,83	459	Çift Tambur Tek Halat-26M.	5,5	400*10	13,5	38/1	26
ZF 82	0,83	626	Çift Tambur Tek Halat-26M.	7,5	400*10	17,5	38/1	26
ZF 82	0,83	334	Çift Tambur 4 Halat-13M.	4,0	400*10	10,5	38/1	13
ZF 82	0,83	459	Çift Tambur 4 Halat-13M.	5,5	400*10	13,5	38/1	13
ZF 82	0,83	626	Çift Tambur 4 Halat-13M.	7,5	400*10	17,5	38/1	13
ZF 82	0,83	334	Tek Tambur Tek Halat-40M.	4,0	400*10	10,5	38/1	40
ZF 82	0,83	459	Tek Tambur Tek Halat-40M.	5,5	400*10	13,5	38/1	40
ZF 82	0,83	626	Tek Tambur Tek Halat-40M.	7,5	400*10	17,5	38/1	40
ZF 82	0,83	334	Tek Tambur Çift Halat-20M.	4,0	400*10	10,5	38/1	20
ZF 82	0,83	459	Tek Tambur Çift Halat-20M.	5,5	400*10	13,5	38/1	20
ZF 82	0,83	626	Tek Tambur Çift Halat-20M.	7,5	400*10	17,5	38/1	20
ZF 82	0,83	334	Çift Tambur Tek Halat-40M.	4,0	400*10	10,5	38/1	40
ZF 82	0,83	459	Çift Tambur Tek Halat-40M.	5,5	400*10	13,5	38/1	40
ZF 82	0,83	626	Çift Tambur Tek Halat-40M.	7,5	400*10	17,5	38/1	40
ZF 82	0,83	334	Çift Tambur 4 Halat-20M.	4,0	400*10	10,5	38/1	20
ZF 82	0,83	459	Çift Tambur 4 Halat-20M.	5,5	400*10	13,5	38/1	20
ZF 82	0,83	626	Çift Tambur 4 Halat-20M.	7,5	400*10	17,5	38/1	20
ZF 82	1,31	245	Tek Tambur Tek Halat-13M.	4,0	400*10	10,5	48/2	13
ZF 82	1,31	336	Tek Tambur Tek Halat-13M.	5,5	400*10	13,5	48/2	13
ZF 82	1,31	459	Tek Tambur Tek Halat-13M.	7,5	400*10	17,5	48/2	13
ZF 82	1,31	245	Tek Tambur Çift Halat-6,5M.	4,0	400*10	10,5	48/2	6,5
ZF 82	1,31	336	Tek Tambur Çift Halat-6,5M.	5,5	400*10	13,5	48/2	6,5
ZF 82	1,31	459	Tek Tambur Çift Halat-6,5M.	7,5	400*10	17,5	48/2	6,5
ZF 82	1,31	245	Çift Tambur Tek halat-13M.	4,0	400*10	10,5	48/2	13
ZF 82	1,31	336	Çift Tambur Tek halat-13M.	5,5	400*10	13,5	48/2	13
ZF 82	1,31	459	Çift Tambur Tek halat-13M.	7,5	400*10	17,5	48/2	13
ZF 82	1,31	245	Çift Tambur 4 Halat-6,5M.	4,0	400*10	10,5	48/2	6,5
ZF 82	1,31	336	Çift Tambur 4 Halat-6,5M.	5,5	400*10	13,5	48/2	6,5
ZF 82	1,31	459	Çift Tambur 4 Halat-6,5M.	7,5	400*10	17,5	48/2	6,5
ZF 82	1,31	245	Tek Tambur Tek Halat-26M.	4,0	400*10	10,5	48/2	26
ZF 82	1,31	336	Tek Tambur Tek Halat-26M.	5,5	400*10	13,5	48/2	26
ZF 82	1,31	459	Tek Tambur Tek Halat-26M.	7,5	400*10	17,5	48/2	26
ZF 82	1,31	245	Tek Tambur Çift Halat-13M.	4,0	400*10	10,5	48/2	13
ZF 82	1,31	336	Tek Tambur Çift Halat-13M.	5,5	400*10	13,5	48/2	13
ZF 82	1,31	459	Tek Tambur Çift Halat-13M.	7,5	400*10	17,5	48/2	13
ZF 82	1,31	245	Çift Tambur Tek Halat-26M.	4,0	400*10	10,5	48/2	26
ZF 82	1,31	336	Çift Tambur Tek Halat-26M.	5,5	400*10	13,5	48/2	26
ZF 82	1,31	459	Çift Tambur Tek Halat-26M.	7,5	400*10	17,5	48/2	26
ZF 82	1,31	245	Çift Tambur 4 Halat-13M.	4,0	400*10	10,5	48/2	13
ZF 82	1,31	336	Çift Tambur 4 Halat-13M.	5,5	400*10	13,5	48/2	13
ZF 82	1,31	459	Çift Tambur 4 Halat-13M.	7,5	400*10	17,5	48/2	13
ZF 82	1,31	245	Tek Tambur Tek Halat-40M.	4,0	400*10	10,5	48/2	40
ZF 82	1,31	336	Tek Tambur Tek Halat-40M.	5,5	400*10	13,5	48/2	40
ZF 82	1,31	459	Tek Tambur Tek Halat-40M.	7,5	400*10	17,5	48/2	40
ZF 82	1,31	245	Tek Tambur Çift Halat-20M.	4,0	400*10	10,5	48/2	20
ZF 82	1,31	336	Tek Tambur Çift Halat-20M.	5,5	400*10	13,5	48/2	20
ZF 82	1,31	459	Tek Tambur Çift Halat-20M.	7,5	400*10	17,5	48/2	20
ZF 82	1,31	245	Çift Tambur Tek Halat-40M.	4,0	400*10	10,5	48/2	40
ZF 82	1,31	336	Çift Tambur Tek Halat-40M.	5,5	400*10	13,5	48/2	40
ZF 82	1,31	459	Çift Tambur Tek Halat-40M.	7,5	400*10	17,5	48/2	40
ZF 82	1,31	245	Çift Tambur 4 Halat-20M.	4,0	400*10	10,5	48/2	20
ZF 82	1,31	336	Çift Tambur 4 Halat-20M.	5,5	400*10	13,5	48/2	20
ZF 82	1,31	459	Çift Tambur 4 Halat-20M.	7,5	400*10	17,5	48/2	20

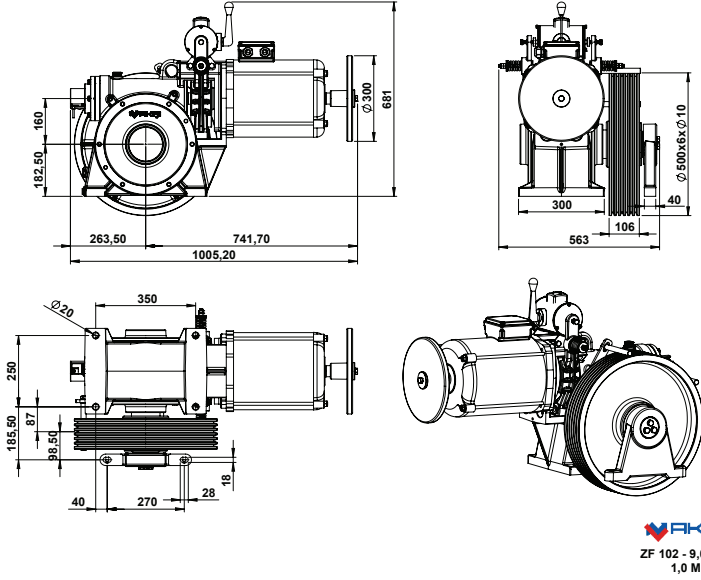
33-51 Metre Seyir Mesafesi

33-51 Meter Travel Distance


1:1 Askı

1:1 Suspension

4500 Kg Statik Yük

4500 Kg Static Load

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Güç (kW) Power (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Tahvil Oranı Ratio	Seyir Mesafesi (m.) Travel Distance (m.)	Makine Ağırlığı (Kg.) Machine Weight (Kg.)
ZF102	1,00	1000	7,5 kW	500*6*10	17,50	39/1	51	335
ZF102	1,00	1125	9,0 kW	500*6*10	21,00	39/1	51	345
ZF102	1,00	1440	11,0 kW	500*7*10	23,00	39/1	51	365
ZF102	1,00	1500	15,0 kW	500*7*10	31,00	39/1	51	370
ZF102	1,20	600	5,5 kW	620*5*10	13,50	39/1	51	345
ZF102	1,20	800	7,5 kW	620*6*10	17,50	39/1	51	350
ZF102	1,20	960	9,0 kW	620*6*10	21,00	39/1	51	360
ZF102	1,20	1125	11,0 kW	620*6*10	23,00	39/1	51	375
ZF102	1,20	1400	15,0 Kw	620*6*10	31,00	39/1	51	385
ZF102	1,60	500	5,5 kW	500*5*10	13,50	49/2	51	345
ZF102	1,60	680	7,5 kW	500*5*10	17,50	49/2	51	350
ZF102	1,60	800	9,0 kW	500*5*10	21,00	49/2	51	345
ZF102	1,60	1000	11,0 kW	500*6*10	23,00	49/2	51	365
ZF102	1,60	1300	15,0 kW	500*6*10	31,00	49/2	51	370
ZF102	2,00	400	5,5 kW	620*4*10	13,50	49/2	51	345
ZF102	2,00	550	7,5 kW	620*5*10	17,50	49/2	51	350
ZF102	2,00	630	9,0 kW	620*5*10	21,00	49/2	51	360
ZF102	2,00	800	11,0 kW	620*6*10	23,00	49/2	51	375
ZF102	2,00	1050	15,0 kW	620*6*10	31,00	49/2	51	385
ZF102	2,40	320	5,5 kW	500*4*10	13,50	46/3	51	320
ZF102	2,40	400	7,5 kW	500*5*10	17,50	46/3	51	335
ZF102	2,40	525	9,0 kW	500*5*10	21,00	46/3	51	345
ZF102	2,40	640	11,0 kW	500*5*10	23,00	46/3	51	365
ZF102	2,40	880	15,0 kW	500*6*10	31,00	46/3	51	370
ZF102	3,20	320	7,5 kW	620*4*10	17,50	46/3	51	350
ZF102	3,20	450	9,0 kW	620*4*10	21,00	46/3	51	360
ZF102	3,20	525	11,0 kW	620*5*10	23,00	46/3	51	375
ZF102	3,20	720	15,0 kW	620*5*10	31,00	46/3	51	385
Z102	1,00-0,25	800	8,2 HP	500*5*10	14,0/8,5	39/1	33	340
Z102	1,00-0,25	1000	10,5 HP	500*6*10	18,5/11,5	39/1	33	360
Z102	1,00-0,25	1200	12,5 HP	500*6*10	20,5/15,00	39/1	33	385
Z102	1,00-0,25	1350	14,0 HP	500*6*10	22,5/12,0	39/1	33	395
Z102	1,00-0,25	1400	16,0 HP	500*7*10	25,0/17,0	39/1	33	405

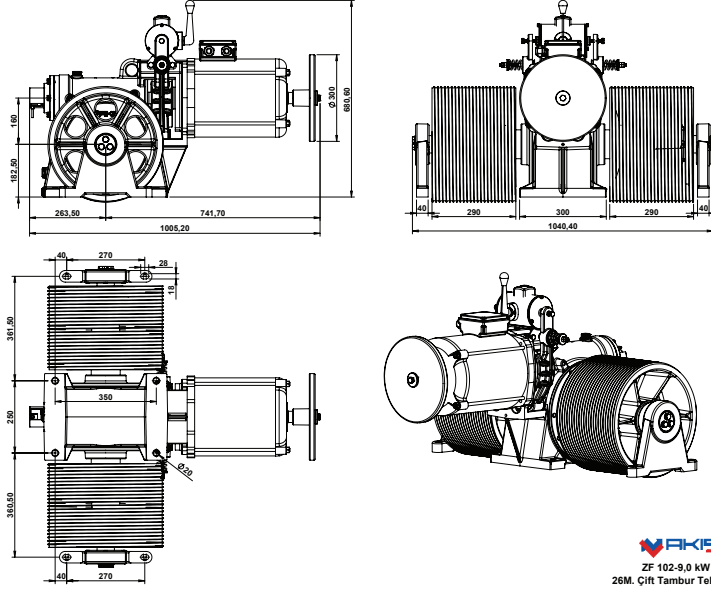

6,5-40 Metre Seyir Mesafesi

6,5-40 Meter Travel Distance

1:1 Askı

1:1 Suspension

4500 Kg Statik Yük

4500 Kg Static Load





Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg)_Kabin Ağırlığı Dahil Capacity (Kg)_Cabin Weight Included		Güç (kW) Power (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Tahvil Oranı Ratio	Seyir Mesafesi (m.) Travel Distance (m.)
ZF 102	0,57	795	Tek Tambur Tek Halat-13M.	5,5	400*10	13,5	55/1	13
ZF 102	0,57	1084	Tek Tambur Tek Halat-13M.	7,5	400*10	17,5	55/1	13
ZF 102	0,57	1300	Tek Tambur Tek Halat-13M.	9,0	400*10	21,0	55/1	13
ZF 102	0,57	1590	Tek Tambur Tek Halat-13M.	11,0	400*10	23,0	55/1	13
ZF 102	0,57	2167	Tek Tambur Tek Halat-13M.	15,0	400*10	31,0	55/1	13
ZF 102	0,57	795	Tek Tambur Çift Halat-6,5M.	5,5	400*10	13,5	55/1	6,5
ZF 102	0,57	1084	Tek Tambur Çift Halat-6,5M.	7,5	400*10	17,5	55/1	6,5
ZF 102	0,57	1300	Tek Tambur Çift Halat-6,5M.	9,0	400*10	21,0	55/1	6,5
ZF 102	0,57	1590	Tek Tambur Çift Halat-6,5M.	11,0	400*10	23,0	55/1	6,5
ZF 102	0,57	2167	Tek Tambur Çift Halat-6,5M.	15,0	400*10	31,0	55/1	6,5
ZF 102	0,57	795	Çift Tambur Tek halat-13M.	5,5	400*10	13,5	55/1	13
ZF 102	0,57	1084	Çift Tambur Tek halat-13M.	7,5	400*10	17,5	55/1	13
ZF 102	0,57	1300	Çift Tambur Tek halat-13M.	9,0	400*10	21,0	55/1	13
ZF 102	0,57	1590	Çift Tambur Tek halat-13M.	11,0	400*10	23,0	55/1	13
ZF 102	0,57	2167	Çift Tambur Tek halat-13M.	15,0	400*10	31,0	55/1	13
ZF 102	0,57	795	Çift Tambur 4 Halat-6,5M.	5,5	400*10	13,5	55/1	6,5
ZF 102	0,57	1084	Çift Tambur 4 Halat-6,5M.	7,5	400*10	17,5	55/1	6,5
ZF 102	0,57	1300	Çift Tambur 4 Halat-6,5M.	9,0	400*10	21,0	55/1	6,5
ZF 102	0,57	1590	Çift Tambur 4 Halat-6,5M.	11,0	400*10	23,0	55/1	6,5
ZF 102	0,57	2167	Çift Tambur 4 Halat-6,5M.	15,0	400*10	31,0	55/1	6,5
ZF 102	0,57	795	Tek Tambur Tek Halat-26M.	5,5	400*10	13,5	55/1	26
ZF 102	0,57	1084	Tek Tambur Tek Halat-26M.	7,5	400*10	17,5	55/1	26
ZF 102	0,57	1300	Tek Tambur Tek Halat-26M.	9,0	400*10	21,0	55/1	26
ZF 102	0,57	1590	Tek Tambur Tek Halat-26M.	11,0	400*10	23,0	55/1	26
ZF 102	0,57	2167	Tek Tambur Tek Halat-26M.	15,0	400*10	31,0	55/1	26
ZF 102	0,57	795	Tek Tambur Çift Halat-13M.	5,5	400*10	13,5	55/1	13
ZF 102	0,57	1084	Tek Tambur Çift Halat-13M.	7,5	400*10	17,5	55/1	13
ZF 102	0,57	1300	Tek Tambur Çift Halat-13M.	9,0	400*10	21,0	55/1	13
ZF 102	0,57	1590	Tek Tambur Çift Halat-13M.	11,0	400*10	23,0	55/1	13
ZF 102	0,57	2167	Tek Tambur Çift Halat-13M.	15,0	400*10	31,0	55/1	13
ZF 102	0,57	795	Çift Tambur Tek Halat-26M.	5,5	400*10	13,5	55/1	26
ZF 102	0,57	1084	Çift Tambur Tek Halat-26M.	7,5	400*10	17,5	55/1	26
ZF 102	0,57	1300	Çift Tambur Tek Halat-26M.	9,0	400*10	21,0	55/1	26
ZF 102	0,57	1590	Çift Tambur Tek Halat-26M.	11,0	400*10	23,0	55/1	26
ZF 102	0,57	2167	Çift Tambur Tek Halat-26M.	15,0	400*10	31,0	55/1	26
ZF 102	0,57	795	Çift Tambur 4 Halat-13M.	5,5	400*10	13,5	55/1	13

Ürün	Hız (m/s)	Kapasite (Kg) _Kabin Ağırlığı Dahil		Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)
Product	Speed (m/s)	Capacity (Kg) _Cabin Weight Included		Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)
ZF 102	0,57	1084	Çift Tambur 4 Halat-13M.	7,5	400*10	17,5	55/1	13
ZF 102	0,57	1300	Çift Tambur 4 Halat-13M.	9,0	400*10	21,0	55/1	13
ZF 102	0,57	1590	Çift Tambur 4 Halat-13M.	11,0	400*10	23,0	55/1	13
ZF 102	0,57	2167	Çift Tambur 4 Halat-13M.	15,0	400*10	31,0	55/1	13
ZF 102	0,57	795	Tek Tambur Tek Halat-40M.	5,5	400*10	13,5	55/1	40
ZF 102	0,57	1084	Tek Tambur Tek Halat-40M.	7,5	400*10	17,5	55/1	40
ZF 102	0,57	1300	Tek Tambur Tek Halat-40M.	9,0	400*10	21,0	55/1	40
ZF 102	0,57	1590	Tek Tambur Tek Halat-40M.	11,0	400*10	23,0	55/1	40
ZF 102	0,57	2167	Tek Tambur Tek Halat-40M.	15,0	400*10	31,0	55/1	40
ZF 102	0,57	795	Tek Tambur Çift Halat-20M.	5,5	400*10	13,5	55/1	20
ZF 102	0,57	1084	Tek Tambur Çift Halat-20M.	7,5	400*10	17,5	55/1	20
ZF 102	0,57	1300	Tek Tambur Çift Halat-20M.	9,0	400*10	21,0	55/1	20
ZF 102	0,57	1590	Tek Tambur Çift Halat-20M.	11,0	400*10	23,0	55/1	20
ZF 102	0,57	2167	Tek Tambur Çift Halat-20M.	15,0	400*10	31,0	55/1	20
ZF 102	0,57	795	Çift Tambur Tek Halat-40M.	5,5	400*10	13,5	55/1	40
ZF 102	0,57	1084	Çift Tambur Tek Halat-40M.	7,5	400*10	17,5	55/1	40
ZF 102	0,57	1300	Çift Tambur Tek Halat-40M.	9,0	400*10	21,0	55/1	40
ZF 102	0,57	1590	Çift Tambur Tek Halat-40M.	11,0	400*10	23,0	55/1	40
ZF 102	0,57	2167	Çift Tambur Tek Halat-40M.	15,0	400*10	31,0	55/1	40
ZF 102	0,57	795	Çift Tambur 4 Halat-20M.	5,5	400*10	13,5	55/1	20
ZF 102	0,57	1084	Çift Tambur 4 Halat-20M.	7,5	400*10	17,5	55/1	20
ZF 102	0,57	1300	Çift Tambur 4 Halat-20M.	9,0	400*10	21,0	55/1	20
ZF 102	0,57	1590	Çift Tambur 4 Halat-20M.	11,0	400*10	23,0	55/1	20
ZF 102	0,57	2167	Çift Tambur 4 Halat-20M.	15,0	400*10	31,0	55/1	20
ZF 102	0,71	605	Tek Tambur Tek Halat-13M.	5,5	400*10	13,5	44/1	13
ZF 102	0,71	825	Tek Tambur Tek Halat-13M.	7,5	400*10	17,5	44/1	13
ZF 102	0,71	990	Tek Tambur Tek Halat-13M.	9,0	400*10	21,0	44/1	13
ZF 102	0,71	1211	Tek Tambur Tek Halat-13M.	11,0	400*10	23,0	44/1	13
ZF 102	0,71	1651	Tek Tambur Tek Halat-13M.	15,0	400*10	31,0	44/1	13
ZF 102	0,71	605	Tek Tambur Çift Halat-6,5M.	5,5	400*10	13,5	44/1	6,5
ZF 102	0,71	825	Tek Tambur Çift Halat-6,5M.	7,5	400*10	17,5	44/1	6,5
ZF 102	0,71	990	Tek Tambur Çift Halat-6,5M.	9,0	400*10	21,0	44/1	6,5
ZF 102	0,71	1211	Tek Tambur Çift Halat-6,5M.	11,0	400*10	23,0	44/1	6,5
ZF 102	0,71	1651	Tek Tambur Çift Halat-6,5M.	15,0	400*10	31,0	44/1	6,5
ZF 102	0,71	605	Çift Tambur Tek halat-13M.	5,5	400*10	13,5	44/1	13
ZF 102	0,71	825	Çift Tambur Tek halat-13M.	7,5	400*10	17,5	44/1	13
ZF 102	0,71	990	Çift Tambur Tek halat-13M.	9,0	400*10	21,0	44/1	13
ZF 102	0,71	1211	Çift Tambur Tek halat-13M.	11,0	400*10	23,0	44/1	13
ZF 102	0,71	1651	Çift Tambur Tek halat-13M.	15,0	400*10	31,0	44/1	13
ZF 102	0,71	605	Çift Tambur 4 Halat-6,5M.	5,5	400*10	13,5	44/1	6,5
ZF 102	0,71	825	Çift Tambur 4 Halat-6,5M.	7,5	400*10	17,5	44/1	6,5
ZF 102	0,71	990	Çift Tambur 4 Halat-6,5M.	9,0	400*10	21,0	44/1	6,5
ZF 102	0,71	1211	Çift Tambur 4 Halat-6,5M.	11,0	400*10	23,0	44/1	6,5
ZF 102	0,71	1651	Çift Tambur 4 Halat-6,5M.	15,0	400*10	31,0	44/1	6,5
ZF 102	0,71	605	Tek Tambur Tek Halat-26M.	5,5	400*10	13,5	44/1	26
ZF 102	0,71	825	Tek Tambur Tek Halat-26M.	7,5	400*10	17,5	44/1	26
ZF 102	0,71	990	Tek Tambur Tek Halat-26M.	9,0	400*10	21,0	44/1	26
ZF 102	0,71	1211	Tek Tambur Tek Halat-26M.	11,0	400*10	23,0	44/1	26
ZF 102	0,71	1651	Tek Tambur Tek Halat-26M.	15,0	400*10	31,0	44/1	26
ZF 102	0,71	605	Tek Tambur Çift Halat-13M.	5,5	400*10	13,5	44/1	13
ZF 102	0,71	825	Tek Tambur Çift Halat-13M.	7,5	400*10	17,5	44/1	13
ZF 102	0,71	990	Tek Tambur Çift Halat-13M.	9,0	400*10	21,0	44/1	13
ZF 102	0,71	1211	Tek Tambur Çift Halat-13M.	11,0	400*10	23,0	44/1	13
ZF 102	0,71	1651	Tek Tambur Çift Halat-13M.	15,0	400*10	31,0	44/1	13

Ürün	Hız (m/s)	Kapasite (Kg) _Kabin Ağırlığı Dahil		Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)
Product	Speed (m/s)	Capacity (Kg) _Cabin Weight Included		Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)
ZF 102	0,71	605	Çift Tambur Tek Halat-26M.	5,5	400*10	13,5	44/1	26
ZF 102	0,71	825	Çift Tambur Tek Halat-26M.	7,5	400*10	17,5	44/1	26
ZF 102	0,71	990	Çift Tambur Tek Halat-26M.	9,0	400*10	21,0	44/1	26
ZF 102	0,71	1211	Çift Tambur Tek Halat-26M.	11,0	400*10	23,0	44/1	26
ZF 102	0,71	1651	Çift Tambur Tek Halat-26M.	15,0	400*10	31,0	44/1	26
ZF 102	0,71	605	Çift Tambur 4 Halat-13M.	5,5	400*10	13,5	44/1	13
ZF 102	0,71	825	Çift Tambur 4 Halat-13M.	7,5	400*10	17,5	44/1	13
ZF 102	0,71	990	Çift Tambur 4 Halat-13M.	9,0	400*10	21,0	44/1	13
ZF 102	0,71	1211	Çift Tambur 4 Halat-13M.	11,0	400*10	23,0	44/1	13
ZF 102	0,71	1651	Çift Tambur 4 Halat-13M.	15,0	400*10	31,0	44/1	13
ZF 102	0,71	605	Tek Tambur Tek Halat-40M.	5,5	400*10	13,5	44/1	40
ZF 102	0,71	825	Tek Tambur Tek Halat-40M.	7,5	400*10	17,5	44/1	40
ZF 102	0,71	990	Tek Tambur Tek Halat-40M.	9,0	400*10	21,0	44/1	40
ZF 102	0,71	1211	Tek Tambur Tek Halat-40M.	11,0	400*10	23,0	44/1	40
ZF 102	0,71	1651	Tek Tambur Tek Halat-40M.	15,0	400*10	31,0	44/1	40
ZF 102	0,71	605	Tek Tambur Çift Halat-20M.	5,5	400*10	13,5	44/1	20
ZF 102	0,71	825	Tek Tambur Çift Halat-20M.	7,5	400*10	17,5	44/1	20
ZF 102	0,71	990	Tek Tambur Çift Halat-20M.	9,0	400*10	21,0	44/1	20
ZF 102	0,71	1211	Tek Tambur Çift Halat-20M.	11,0	400*10	23,0	44/1	20
ZF 102	0,71	1651	Tek Tambur Çift Halat-20M.	15,0	400*10	31,0	44/1	20
ZF 102	0,71	605	Çift Tambur Tek Halat-40M.	5,5	400*10	13,5	44/1	40
ZF 102	0,71	825	Çift Tambur Tek Halat-40M.	7,5	400*10	17,5	44/1	40
ZF 102	0,71	990	Çift Tambur Tek Halat-40M.	9,0	400*10	21,0	44/1	40
ZF 102	0,71	1211	Çift Tambur Tek Halat-40M.	11,0	400*10	23,0	44/1	40
ZF 102	0,71	1651	Çift Tambur Tek Halat-40M.	15,0	400*10	31,0	44/1	40
ZF 102	0,71	605	Çift Tambur 4 Halat-20M.	5,5	400*10	13,5	44/1	20
ZF 102	0,71	825	Çift Tambur 4 Halat-20M.	7,5	400*10	17,5	44/1	20
ZF 102	0,71	990	Çift Tambur 4 Halat-20M.	9,0	400*10	21,0	44/1	20
ZF 102	0,71	1211	Çift Tambur 4 Halat-20M.	11,0	400*10	23,0	44/1	20
ZF 102	0,71	1651	Çift Tambur 4 Halat-20M.	15,0	400*10	31,0	44/1	20
ZF 102	0,81	547	Tek Tambur Tek Halat-13M.	5,5	400*10	13,5	39/1	13
ZF 102	0,81	747	Tek Tambur Tek Halat-13M.	7,5	400*10	17,5	39/1	13
ZF 102	0,81	896	Tek Tambur Tek Halat-13M.	9,0	400*10	21,0	39/1	13
ZF 102	0,81	1095	Tek Tambur Tek Halat-13M.	11,0	400*10	23,0	39/1	13
ZF 102	0,81	1493	Tek Tambur Tek Halat-13M.	15,0	400*10	31,0	39/1	13
ZF 102	0,81	547	Tek Tambur Çift Halat-6,5M.	5,5	400*10	13,5	39/1	6,5
ZF 102	0,81	747	Tek Tambur Çift Halat-6,5M.	7,5	400*10	17,5	39/1	6,5
ZF 102	0,81	896	Tek Tambur Çift Halat-6,5M.	9,0	400*10	21,0	39/1	6,5
ZF 102	0,81	1095	Tek Tambur Çift Halat-6,5M.	11,0	400*10	23,0	39/1	6,5
ZF 102	0,81	1493	Tek Tambur Çift Halat-6,5M.	15,0	400*10	31,0	39/1	6,5
ZF 102	0,81	547	Çift Tambur Tek halat-13M.	5,5	400*10	13,5	39/1	13
ZF 102	0,81	747	Çift Tambur Tek halat-13M.	7,5	400*10	17,5	39/1	13
ZF 102	0,81	896	Çift Tambur Tek halat-13M.	9,0	400*10	21,0	39/1	13
ZF 102	0,81	1095	Çift Tambur Tek halat-13M.	11,0	400*10	23,0	39/1	13
ZF 102	0,81	1493	Çift Tambur Tek halat-13M.	15,0	400*10	31,0	39/1	13
ZF 102	0,81	547	Çift Tambur 4 Halat-6,5M.	5,5	400*10	13,5	39/1	6,5
ZF 102	0,81	747	Çift Tambur 4 Halat-6,5M.	7,5	400*10	17,5	39/1	6,5
ZF 102	0,81	896	Çift Tambur 4 Halat-6,5M.	9,0	400*10	21,0	39/1	6,5
ZF 102	0,81	1095	Çift Tambur 4 Halat-6,5M.	11,0	400*10	23,0	39/1	6,5
ZF 102	0,81	1493	Çift Tambur 4 Halat-6,5M.	15,0	400*10	31,0	39/1	6,5
ZF 102	0,81	547	Tek Tambur Tek Halat-26M.	5,5	400*10	13,5	39/1	26
ZF 102	0,81	747	Tek Tambur Tek Halat-26M.	7,5	400*10	17,5	39/1	26
ZF 102	0,81	896	Tek Tambur Tek Halat-26M.	9,0	400*10	21,0	39/1	26

Ürün	Hız (m/s)	Kapasite (Kg)_Kabin Ağırlığı Dahil		Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)
Product	Speed (m/s)	Capacity (Kg)_Cabin Weight Included		Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)
ZF 102	0,81	1095	Tek Tambur Tek Halat-26M.	11,0	400*10	23,0	39/1	26
ZF 102	0,81	1493	Tek Tambur Tek Halat-26M.	15,0	400*10	31,0	39/1	26
ZF 102	0,81	547	Tek Tambur Çift Halat-13M.	5,5	400*10	13,5	39/1	13
ZF 102	0,81	747	Tek Tambur Çift Halat-13M.	7,5	400*10	17,5	39/1	13
ZF 102	0,81	896	Tek Tambur Çift Halat-13M.	9,0	400*10	21,0	39/1	13
ZF 102	0,81	1095	Tek Tambur Çift Halat-13M.	11,0	400*10	23,0	39/1	13
ZF 102	0,81	1493	Tek Tambur Çift Halat-13M.	15,0	400*10	31,0	39/1	13
ZF 102	0,81	547	Çift Tambur Tek Halat-26M.	5,5	400*10	13,5	39/1	26
ZF 102	0,81	747	Çift Tambur Tek Halat-26M.	7,5	400*10	17,5	39/1	26
ZF 102	0,81	896	Çift Tambur Tek Halat-26M.	9,0	400*10	21,0	39/1	26
ZF 102	0,81	1095	Çift Tambur Tek Halat-26M.	11,0	400*10	23,0	39/1	26
ZF 102	0,81	1493	Çift Tambur Tek Halat-26M.	15,0	400*10	31,0	39/1	26
ZF 102	0,81	547	Çift Tambur 4 Halat-13M.	5,5	400*10	13,5	39/1	13
ZF 102	0,81	747	Çift Tambur 4 Halat-13M.	7,5	400*10	17,5	39/1	13
ZF 102	0,81	896	Çift Tambur 4 Halat-13M.	9,0	400*10	21,0	39/1	13
ZF 102	0,81	1095	Çift Tambur 4 Halat-13M.	11,0	400*10	23,0	39/1	13
ZF 102	0,81	1493	Çift Tambur 4 Halat-13M.	15,0	400*10	31,0	39/1	13
ZF 102	0,81	547	Tek Tambur Tek Halat-40M.	5,5	400*10	13,5	39/1	40
ZF 102	0,81	747	Tek Tambur Tek Halat-40M.	7,5	400*10	17,5	39/1	40
ZF 102	0,81	896	Tek Tambur Tek Halat-40M.	9,0	400*10	21,0	39/1	40
ZF 102	0,81	1095	Tek Tambur Tek Halat-40M.	11,0	400*10	23,0	39/1	40
ZF 102	0,81	1493	Tek Tambur Tek Halat-40M.	15,0	400*10	31,0	39/1	40
ZF 102	0,81	547	Tek Tambur Çift Halat-20M.	5,5	400*10	13,5	39/1	20
ZF 102	0,81	747	Tek Tambur Çift Halat-20M.	7,5	400*10	17,5	39/1	20
ZF 102	0,81	896	Tek Tambur Çift Halat-20M.	9,0	400*10	21,0	39/1	20
ZF 102	0,81	1095	Tek Tambur Çift Halat-20M.	11,0	400*10	23,0	39/1	20
ZF 102	0,81	1493	Tek Tambur Çift Halat-20M.	15,0	400*10	31,0	39/1	20
ZF 102	0,81	547	Çift Tambur Tek Halat-40M.	5,5	400*10	13,5	39/1	40
ZF 102	0,81	747	Çift Tambur Tek Halat-40M.	7,5	400*10	17,5	39/1	40
ZF 102	0,81	896	Çift Tambur Tek Halat-40M.	9,0	400*10	21,0	39/1	40
ZF 102	0,81	1095	Çift Tambur Tek Halat-40M.	11,0	400*10	23,0	39/1	40
ZF 102	0,81	1493	Çift Tambur Tek Halat-40M.	15,0	400*10	31,0	39/1	40
ZF 102	0,81	547	Çift Tambur 4 Halat-20M.	5,5	400*10	13,5	39/1	20
ZF 102	0,81	747	Çift Tambur 4 Halat-20M.	7,5	400*10	17,5	39/1	20
ZF 102	0,81	896	Çift Tambur 4 Halat-20M.	9,0	400*10	21,0	39/1	20
ZF 102	0,81	1095	Çift Tambur 4 Halat-20M.	11,0	400*10	23,0	39/1	20
ZF 102	0,81	1493	Çift Tambur 4 Halat-20M.	15,0	400*10	31,0	39/1	20
ZF 102	1,28	376	Tek Tambur Tek Halat-13M.	5,5	400*10	13,5	49/2	13
ZF 102	1,28	513	Tek Tambur Tek Halat-13M.	7,5	400*10	17,5	49/2	13
ZF 102	1,28	616	Tek Tambur Tek Halat-13M.	9,0	400*10	21,0	49/2	13
ZF 102	1,28	753	Tek Tambur Tek Halat-13M.	11,0	400*10	23,0	49/2	13
ZF 102	1,28	1027	Tek Tambur Tek Halat-13M.	15,0	400*10	31,0	49/2	13
ZF 102	1,28	376	Tek Tambur Çift Halat-6,5M.	5,5	400*10	13,5	49/2	6,5
ZF 102	1,28	513	Tek Tambur Çift Halat-6,5M.	7,5	400*10	17,5	49/2	6,5
ZF 102	1,28	616	Tek Tambur Çift Halat-6,5M.	9,0	400*10	21,0	49/2	6,5
ZF 102	1,28	753	Tek Tambur Çift Halat-6,5M.	11,0	400*10	23,0	49/2	6,5
ZF 102	1,28	1027	Tek Tambur Çift Halat-6,5M.	15,0	400*10	31,0	49/2	6,5
ZF 102	1,28	376	Çift Tambur Tek halat-13M.	5,5	400*10	13,5	49/2	13
ZF 102	1,28	513	Çift Tambur Tek halat-13M.	7,5	400*10	17,5	49/2	13
ZF 102	1,28	616	Çift Tambur Tek halat-13M.	9,0	400*10	21,0	49/2	13
ZF 102	1,28	753	Çift Tambur Tek halat-13M.	11,0	400*10	23,0	49/2	13
ZF 102	1,28	1027	Çift Tambur Tek halat-13M.	15,0	400*10	31,0	49/2	13
ZF 102	1,28	376	Çift Tambur 4 Halat-6,5M.	5,5	400*10	13,5	49/2	6,5

Ürün	Hız (m/s)	Kapasite (Kg) _Kabin Ağırlığı Dahil		Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)
Product	Speed (m/s)	Capacity (Kg)_Cabin Weight Included		Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)
ZF 102	1,28	513	Çift Tambur 4 Halat-6,5M.	7,5	400*10	17,5	49/2	6,5
ZF 102	1,28	616	Çift Tambur 4 Halat-6,5M.	9,0	400*10	21,0	49/2	6,5
ZF 102	1,28	753	Çift Tambur 4 Halat-6,5M.	11,0	400*10	23,0	49/2	6,5
ZF 102	1,28	1027	Çift Tambur 4 Halat-6,5M.	15,0	400*10	31,0	49/2	6,5
ZF 102	1,28	376	Tek Tambur Tek Halat-26M.	5,5	400*10	13,5	49/2	26
ZF 102	1,28	513	Tek Tambur Tek Halat-26M.	7,5	400*10	17,5	49/2	26
ZF 102	1,28	616	Tek Tambur Tek Halat-26M.	9,0	400*10	21,0	49/2	26
ZF 102	1,28	753	Tek Tambur Tek Halat-26M.	11,0	400*10	23,0	49/2	26
ZF 102	1,28	1027	Tek Tambur Tek Halat-26M.	15,0	400*10	31,0	49/2	26
ZF 102	1,28	376	Tek Tambur Çift Halat-13M.	5,5	400*10	13,5	49/2	13
ZF 102	1,28	513	Tek Tambur Çift Halat-13M.	7,5	400*10	17,5	49/2	13
ZF 102	1,28	616	Tek Tambur Çift Halat-13M.	9,0	400*10	21,0	49/2	13
ZF 102	1,28	753	Tek Tambur Çift Halat-13M.	11,0	400*10	23,0	49/2	13
ZF 102	1,28	1027	Tek Tambur Çift Halat-13M.	15,0	400*10	31,0	49/2	13
ZF 102	1,28	376	Çift Tambur Tek Halat-26M.	5,5	400*10	13,5	49/2	26
ZF 102	1,28	513	Çift Tambur Tek Halat-26M.	7,5	400*10	17,5	49/2	26
ZF 102	1,28	616	Çift Tambur Tek Halat-26M.	9,0	400*10	21,0	49/2	26
ZF 102	1,28	753	Çift Tambur Tek Halat-26M.	11,0	400*10	23,0	49/2	26
ZF 102	1,28	1027	Çift Tambur Tek Halat-26M.	15,0	400*10	31,0	49/2	26
ZF 102	1,28	376	Çift Tambur 4 Halat-13M.	5,5	400*10	13,5	49/2	13
ZF 102	1,28	513	Çift Tambur 4 Halat-13M.	7,5	400*10	17,5	49/2	13
ZF 102	1,28	616	Çift Tambur 4 Halat-13M.	9,0	400*10	21,0	49/2	13
ZF 102	1,28	753	Çift Tambur 4 Halat-13M.	11,0	400*10	23,0	49/2	13
ZF 102	1,28	1027	Çift Tambur 4 Halat-13M.	15,0	400*10	31,0	49/2	13
ZF 102	1,28	376	Tek Tambur Tek Halat-40M.	5,5	400*10	13,5	49/2	40
ZF 102	1,28	513	Tek Tambur Tek Halat-40M.	7,5	400*10	17,5	49/2	40
ZF 102	1,28	616	Tek Tambur Tek Halat-40M.	9,0	400*10	21,0	49/2	40
ZF 102	1,28	753	Tek Tambur Tek Halat-40M.	11,0	400*10	23,0	49/2	40
ZF 102	1,28	1027	Tek Tambur Tek Halat-40M.	15,0	400*10	31,0	49/2	40
ZF 102	1,28	376	Tek Tambur Çift Halat-20M.	5,5	400*10	13,5	49/2	20
ZF 102	1,28	513	Tek Tambur Çift Halat-20M.	7,5	400*10	17,5	49/2	20
ZF 102	1,28	616	Tek Tambur Çift Halat-20M.	9,0	400*10	21,0	49/2	20
ZF 102	1,28	753	Tek Tambur Çift Halat-20M.	11,0	400*10	23,0	49/2	20
ZF 102	1,28	1027	Tek Tambur Çift Halat-20M.	15,0	400*10	31,0	49/2	20
ZF 102	1,28	376	Çift Tambur Tek Halat-40M.	5,5	400*10	13,5	49/2	40
ZF 102	1,28	513	Çift Tambur Tek Halat-40M.	7,5	400*10	17,5	49/2	40
ZF 102	1,28	616	Çift Tambur Tek Halat-40M.	9,0	400*10	21,0	49/2	40
ZF 102	1,28	753	Çift Tambur Tek Halat-40M.	11,0	400*10	23,0	49/2	40
ZF 102	1,28	1027	Çift Tambur Tek Halat-40M.	15,0	400*10	31,0	49/2	40
ZF 102	1,28	376	Çift Tambur 4 Halat-20M.	5,5	400*10	13,5	49/2	20
ZF 102	1,28	513	Çift Tambur 4 Halat-20M.	7,5	400*10	17,5	49/2	20
ZF 102	1,28	616	Çift Tambur 4 Halat-20M.	9,0	400*10	21,0	49/2	20
ZF 102	1,28	753	Çift Tambur 4 Halat-20M.	11,0	400*10	23,0	49/2	20
ZF 102	1,28	1027	Çift Tambur 4 Halat-20M.	15,0	400*10	31,0	49/2	20

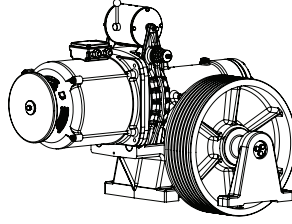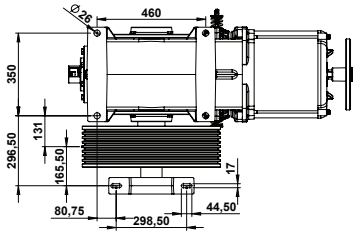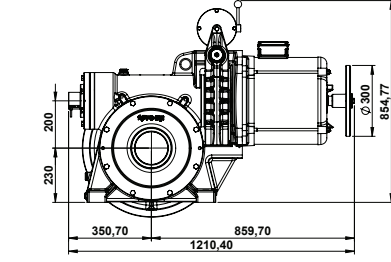

AKIS
ZF 112-15,0 kW
1,0 M



33-51 Metre Seyir Mesafesi

33-51 Meter Travel Distance





1:1 Askı

1:1 Suspension

12000 Kg Statik Yük

12000 Kg Static Load

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Güç (kW) Power (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Tahvil Oranı Ratio	Seyir Mesafesi (m.) Travel Distance (m.)	Makine Ağırlığı (Kg.) Machine Weight (Kg.)
ZF112	1,00	1840	11,0 kW	580*9*10	23,00	46/1	51	700
ZF112	1,00	2480	15,0 kW	580*8*12	31,00	46/1	51	720
ZF112	1,00	3075	18,5 kW	580*10*12	38,80	46/1	51	745
ZF112	1,00	3680	22,0 kW	580*9*14	44,20	46/1	51	770
ZF112	1,20	1520	11,0 kW	700*7*10	23,00	46/1	51	710
ZF112	1,20	2080	15,0 kW	700*10*10	31,00	46/1	51	730
ZF112	1,20	2560	18,5 kW	700*8*12	38,80	46/1	51	755
ZF112	1,20	3040	22,0 kW	700*10*12	44,20	46/1	51	780
ZF112	1,60	1200	11,0 kW	580*6*10	23,00	55/2	51	700
ZF112	1,60	1650	15,0 kW	580*8*10	31,00	55/2	51	720
ZF112	1,60	2025	18,5 kW	580*10*10	38,80	55/2	51	745
ZF112	1,60	2400	22,0 kW	580*8*12	44,20	55/2	51	770
ZF112	2,00	960	11,0 kW	700*6*10	23,00	55/2	51	710
ZF112	2,00	1360	15,0 kW	700*6*10	31,00	55/2	51	730
ZF112	2,00	1680	18,5 kW	700*8*10	38,80	55/2	51	755
ZF112	2,00	2000	22,0 kW	700*9*10	44,20	55/2	51	780
ZF112	2,40	750	11,0 kW	580*5*10	23,00	51/3	51	700
ZF112	2,40	1050	15,0 kW	580*6*10	31,00	51/3	51	720
ZF112	2,40	1280	18,5 kW	580*6*10	38,80	51/3	51	745
ZF112	2,40	1575	22,0 kW	580*8*10	44,20	51/3	51	770
ZF112	3,20	640	11,0 kW	700*5*10	23,00	51/3	51	710
ZF112	3,20	880	15,0 kW	700*6*10	31,00	51/3	51	730
ZF112	3,20	1050	18,5 kW	700*6*10	38,80	51/3	51	755
ZF112	3,20	1280	22,0 kW	700*6*10	44,20	51/3	51	780
Z112	1,00-0,25	1725	14,0 HP	580*8*10	22,5/12,0	46/1	33	740
Z112	1,00-0,25	1950	16,0 HP	580*9*10	25,0/17,0	46/1	33	750
Z112	1,00-0,25	2475	20,0 HP	580*8*12	31,0/21,0	46/1	33	760



ZF 112-11,0 kW
20M. ÇİFT TAMBUR ÇİFT HALAT

6,5-40 Metre Seyir Mesafesi

6,5-40 Meter Travel Distance

1:1 Askı






1:1 Suspension

12000 Kg Statik Yük

12000 Kg Static Load

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg)_Kabin Ağırlığı Dahil Capacity (Kg)_Cabin Weight Included		Güç (kW) Power (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Tahvil Oranı Ratio	Seyir Mesafesi (m.) Travel Distance (m.)
ZF 112	0,68	1631	Tek Tambur Çift Halat-6,5M.	11,0	400*10	23,0	46/1	6,5
ZF 112	0,68	2225	Tek Tambur Çift Halat-6,5M.	15,0	400*10	31,0	46/1	6,5
ZF 112	0,68	2744	Tek Tambur Çift Halat-6,5M.	18,5	400*10	38,8	46/1	6,5
ZF 112	0,68	3263	Tek Tambur Çift Halat-6,5M.	22,0	400*10	44,2	46/1	6,5
ZF 112	0,68	1631	Çift Tambur Tek halat-13M.	11,0	400*10	23,0	46/1	13
ZF 112	0,68	2225	Çift Tambur Tek halat-13M.	15,0	400*10	31,0	46/1	13
ZF 112	0,68	2744	Çift Tambur Tek halat-13M.	18,5	400*10	38,8	46/1	13
ZF 112	0,68	3263	Çift Tambur Tek halat-13M.	22,0	400*10	44,2	46/1	13
ZF 112	0,68	1631	Çift Tambur 4 Halat-6,5M.	11,0	400*10	23,0	46/1	6,5
ZF 112	0,68	2225	Çift Tambur 4 Halat-6,5M.	15,0	400*10	31,0	46/1	6,5
ZF 112	0,68	2744	Çift Tambur 4 Halat-6,5M.	18,5	400*10	38,8	46/1	6,5
ZF 112	0,68	3263	Çift Tambur 4 Halat-6,5M.	22,0	400*10	44,2	46/1	6,5
ZF 112	0,68	1631	Tek Tambur Çift Halat-13M.	11,0	400*10	23,0	46/1	13
ZF 112	0,68	2225	Tek Tambur Çift Halat-13M.	15,0	400*10	31,0	46/1	13
ZF 112	0,68	2744	Tek Tambur Çift Halat-13M.	18,5	400*10	38,8	46/1	13
ZF 112	0,68	3263	Tek Tambur Çift Halat-13M.	22,0	400*10	44,2	46/1	13
ZF 112	0,68	1631	Çift Tambur Tek Halat-26M.	11,0	400*10	23,0	46/1	26
ZF 112	0,68	2225	Çift Tambur Tek Halat-26M.	15,0	400*10	31,0	46/1	26
ZF 112	0,68	2744	Çift Tambur Tek Halat-26M.	18,5	400*10	38,8	46/1	26
ZF 112	0,68	3263	Çift Tambur Tek Halat-26M.	22,0	400*10	44,2	46/1	26
ZF 112	0,68	1631	Çift Tambur 4 Halat-13M.	11,0	400*10	23,0	46/1	13
ZF 112	0,68	2225	Çift Tambur 4 Halat-13M.	15,0	400*10	31,0	46/1	13
ZF 112	0,68	2744	Çift Tambur 4 Halat-13M.	18,5	400*10	38,8	46/1	13
ZF 112	0,68	3263	Çift Tambur 4 Halat-13M.	22,0	400*10	44,2	46/1	13
ZF 112	0,68	1631	Tek Tambur Çift Halat-20M.	11,0	400*10	23,0	46/1	20
ZF 112	0,68	2225	Tek Tambur Çift Halat-20M.	15,0	400*10	31,0	46/1	20
ZF 112	0,68	2744	Tek Tambur Çift Halat-20M.	18,5	400*10	38,8	46/1	20
ZF 112	0,68	3263	Tek Tambur Çift Halat-20M.	22,0	400*10	44,2	46/1	20
ZF 112	0,68	1631	Çift Tambur Tek Halat-40M.	11,0	400*10	23,0	46/1	40
ZF 112	0,68	2225	Çift Tambur Tek Halat-40M.	15,0	400*10	31,0	46/1	40
ZF 112	0,68	2744	Çift Tambur Tek Halat-40M.	18,5	400*10	38,8	46/1	40
ZF 112	0,68	3263	Çift Tambur Tek Halat-40M.	22,0	400*10	44,2	46/1	40
ZF 112	0,68	1631	Çift Tambur 4 Halat-20M.	11,0	400*10	23,0	46/1	20
ZF 112	0,68	2225	Çift Tambur 4 Halat-20M.	15,0	400*10	31,0	46/1	20
ZF 112	0,68	2744	Çift Tambur 4 Halat-20M.	18,5	400*10	38,8	46/1	20

Ürün	Hız (m/s)	Kapasite (Kg)_Kabin Ağırlığı Dahil	Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)
Product	Speed (m/s)	Capacity (Kg)_Cabin Weight Included	Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)
ZF 112	0,68	3263 Çift Tambur 4 Halat-20M.	22,0	400*10	44,2	46/1	20
ZF 112	1,14	1067 Tek Tambur Çift Halat-6,5M.	11,0	400*10	23,0	55/2	6,5
ZF 112	1,14	1455 Tek Tambur Çift Halat-6,5M.	15,0	400*10	31,0	55/2	6,5
ZF 112	1,14	1795 Tek Tambur Çift Halat-6,5M.	18,5	400*10	38,8	55/2	6,5
ZF 112	1,14	2134 Tek Tambur Çift Halat-6,5M.	22,0	400*10	44,2	55/2	6,5
ZF 112	1,14	1067 Çift Tambur Tek halat-13M.	11,0	400*10	23,0	55/2	13
ZF 112	1,14	1455 Çift Tambur Tek halat-13M.	15,0	400*10	31,0	55/2	13
ZF 112	1,14	1795 Çift Tambur Tek halat-13M.	18,5	400*10	38,8	55/2	13
ZF 112	1,14	2134 Çift Tambur Tek halat-13M.	22,0	400*10	44,2	55/2	13
ZF 112	1,14	1067 Çift Tambur 4 Halat-6,5M.	11,0	400*10	23,0	55/2	6,5
ZF 112	1,14	1455 Çift Tambur 4 Halat-6,5M.	15,0	400*10	31,0	55/2	6,5
ZF 112	1,14	1795 Çift Tambur 4 Halat-6,5M.	18,5	400*10	38,8	55/2	6,5
ZF 112	1,14	2134 Çift Tambur 4 Halat-6,5M.	22,0	400*10	44,2	55/2	6,5
ZF 112	1,14	1067 Tek Tambur Çift Halat-13M.	11,0	400*10	23,0	55/2	13
ZF 112	1,14	1455 Tek Tambur Çift Halat-13M.	15,0	400*10	31,0	55/2	13
ZF 112	1,14	1795 Tek Tambur Çift Halat-13M.	18,5	400*10	38,8	55/2	13
ZF 112	1,14	2134 Tek Tambur Çift Halat-13M.	22,0	400*10	44,2	55/2	13
ZF 112	1,14	1067 Çift Tambur Tek Halat-26M.	11,0	400*10	23,0	55/2	26
ZF 112	1,14	1455 Çift Tambur Tek Halat-26M.	15,0	400*10	31,0	55/2	26
ZF 112	1,14	1795 Çift Tambur Tek Halat-26M.	18,5	400*10	38,8	55/2	26
ZF 112	1,14	2134 Çift Tambur Tek Halat-26M.	22,0	400*10	44,2	55/2	26
ZF 112	1,14	1067 Çift Tambur 4 Halat-13M.	11,0	400*10	23,0	55/2	13
ZF 112	1,14	1455 Çift Tambur 4 Halat-13M.	15,0	400*10	31,0	55/2	13
ZF 112	1,14	1795 Çift Tambur 4 Halat-13M.	18,5	400*10	38,8	55/2	13
ZF 112	1,14	2134 Çift Tambur 4 Halat-13M.	22,0	400*10	44,2	55/2	13
ZF 112	1,14	1067 Tek Tambur Çift Halat-20M.	11,0	400*10	23,0	55/2	20
ZF 112	1,14	1455 Tek Tambur Çift Halat-20M.	15,0	400*10	31,0	55/2	20
ZF 112	1,14	1795 Tek Tambur Çift Halat-20M.	18,5	400*10	38,8	55/2	20
ZF 112	1,14	2134 Tek Tambur Çift Halat-20M.	22,0	400*10	44,2	55/2	20
ZF 112	1,14	1067 Çift Tambur Tek Halat-40M.	11,0	400*10	23,0	55/2	40
ZF 112	1,14	1455 Çift Tambur Tek Halat-40M.	15,0	400*10	31,0	55/2	40
ZF 112	1,14	1795 Çift Tambur Tek Halat-40M.	18,5	400*10	38,8	55/2	40
ZF 112	1,14	2134 Çift Tambur Tek Halat-40M.	22,0	400*10	44,2	55/2	40
ZF 112	1,14	1067 Çift Tambur 4 Halat-20M.	11,0	400*10	23,0	55/2	20
ZF 112	1,14	1455 Çift Tambur 4 Halat-20M.	15,0	400*10	31,0	55/2	20
ZF 112	1,14	1795 Çift Tambur 4 Halat-20M.	18,5	400*10	38,8	55/2	20
ZF 112	1,14	2134 Çift Tambur 4 Halat-20M.	22,0	400*10	44,2	55/2	20

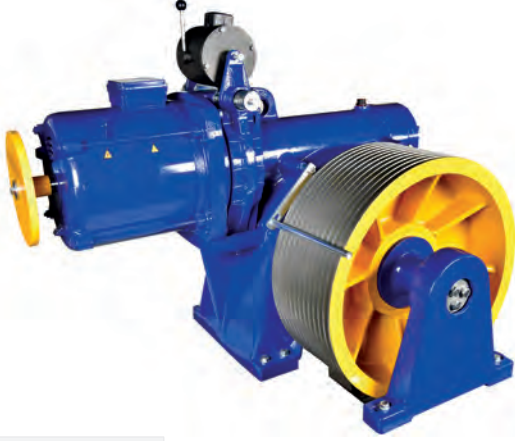

AKIS
ZF 142-18,5 kW
1,0 M

33-51 Metre Seyir Mesafesi

33-51 Meter Travel Distance

1:1 Askı

1:1 Suspension

30000 Kg Statik Yük

30000 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Güç (kW)	Kasnak (mm)	Amper (A)	Tahvil Oranı	Seyir Mesafesi (m.)	Makine Ağırlığı (Kg.)
Product	Speed (m/s)	Capacity (Kg)	Power (kW)	Sheave (mm)	Current (A)	Ratio	Travel Distance (m.)	Machine Weighth (Kg.)
ZF142	1,00	4880	18,5 kW	700*12*14	38,80	55/1	51	1350
ZF142	1,00	5775	22,0 kW	700*14*14	44,20	55/1	51	1370
ZF142	1,00	6880	30,0 kW	700*12*16	60,00	55/1	51	1400
ZF142	1,00	9750	37,0 kW	700*16*16	72,00	55/1	51	1430
ZF142	1,20	3900	18,5 kW	875*10*14	38,80	55/1	51	1360
ZF142	1,20	4640	22,0 kW	875*11*14	44,20	55/1	51	1380
ZF142	1,20	5475	30,0 kW	875*13*14	60,00	55/1	51	1410
ZF142	1,20	7800	37,0 kW	875*14*16	72,00	55/1	51	1440
ZF142	1,60	3225	18,5 kW	700*10*12	38,80	69/2	51	1350
ZF142	1,60	3840	22,0 kW	700*12*12	44,20	69/2	51	1370
ZF142	1,60	5250	30,0 kW	700*12*14	60,00	69/2	51	1400
ZF142	1,60	6480	37,0 kW	700*14*14	72,00	69/2	51	1430
ZF142	2,00	2560	18,5 kW	875*9*12	38,80	69/2	51	1360
ZF142	2,00	3040	22,0 kW	875*10*12	44,20	69/2	51	1380
ZF142	2,00	4200	30,0 kW	875*10*14	60,00	69/2	51	1410
ZF142	2,00	5200	37,0 kW	875*12*14	72,00	69/2	51	1440
ZF142	2,40	2175	18,5 kW	700*10*10	38,80	65/3	51	1350
ZF142	2,40	2560	22,0 kW	700*9*12	44,20	65/3	51	1370
ZF142	2,40	3525	30,0 kW	700*9*14	60,00	65/3	51	1400
ZF142	2,40	4350	37,0 kW	700*10*14	72,00	65/3	51	1430
ZF142	3,20	1725	18,5 kW	875*9*10	38,80	65/3	51	1360
ZF142	3,20	2025	22,0 kW	875*10*10	44,20	65/3	51	1380
ZF142	3,20	2800	30,0 kW	875*10*12	60,00	65/3	51	1410
ZF142	3,20	3450	37,0 kW	875*9*14	72,00	65/3	51	1440
Z142	1,00-0,25	3840	20,0 HP	700*9*14	31,0/21,0	55/1	33	1350

GEARLESS MACHINES



Speed: 0,63-2,50 m/s

Capacity: 320-3.500 kg

Travel Distance: 21-51 meter





21 Metre Seyir Mesafesi





21 Meter Travel Distance

2:1 Askı

2:1 Suspension





7000 Kg Statik Yük

7000 Kg Static Load



mugen
MÜGEN MRL1

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
MUGEN MRL 1	0,63	320	1,2	210X5X6,5	3,7	20P-19.16	115	103	155
MUGEN MRL 1	1,00		2,0		5,2	20P-30.33	182		
MUGEN MRL 1	1,60		3,1		7,8	20P-48.50	291		
MUGEN MRL 1	0,63	400	1,5	210X5X6,5	4,7	20P-19.16	115	129	
MUGEN MRL 1	1,00		2,4		6,5	20P-30.33	182		
MUGEN MRL 1	1,60		3,9		9,8	20P-48.50	291		
MUGEN MRL 1	0,63	320	1,2	240X5X6,5	3,7	20P-16.71	100	118	
MUGEN MRL 1	1,00		2,0		5,2	20P-26.53	160		
MUGEN MRL 1	1,60		3,1		7,8	20P-42.44	255		



mugen
MUGEN MRL-2



21 Metre Seyir Mesafesi

21 Meter Travel Distance

2:1 Askı

2:1 Suspension

7000 Kg Statik Yük

7000 Kg Static Load

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Çıkış Gücü (kW) Power Output (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Kutup-Frekans Pole-Frequency	Devir (rpm) Revolution (rpm)	Tork (Nm) Torque (Nm)	Makine Ağırlığı (Kg) Machine Weight (Kg)
MUGEN MRL 2	0,63	480	1,9	210X6X6,5	5,6	20P-19.16	115	155	175
MUGEN MRL 2	1,00		2,9		7,8	20P-30.33	182		
MUGEN MRL 2	1,60		4,7		11,8	20P-48.50	291		
MUGEN MRL 2	0,63	630	2,4	210X7X6,5	7,4	20P-19.16	115	203	
MUGEN MRL 2	1,00		3,9		10,2	20P-30.33	182		
MUGEN MRL 2	1,60		6,2		15,4	20P-48.50	291		
MUGEN MRL 2	0,63	800	3,1	210X8X6,5	9,4	20P-19.16	115	258	
MUGEN MRL 2	1,00		4,9		13,0	20P-30.33	182		
MUGEN MRL 2	1,60		7,8		19,6	20P-48.50	291		
MUGEN MRL 2	0,63	400	1,5	240X5X6,5	4,7	20P-16.67	100	147	
MUGEN MRL 2	1,00		2,5		6,5	20P-26.66	160		
MUGEN MRL 2	1,60		3,9		9,8	20P-42.44	255		
MUGEN MRL 2	0,63	480	1,9	240X5X6,5	5,6	20P-16.67	100	177	
MUGEN MRL 2	1,00		2,9		7,8	20P-26.66	160		
MUGEN MRL 2	1,60		4,7		11,8	20P-42.44	255		
MUGEN MRL 2	0,63	630	2,4	240X6X6,5	7,4	20P-16.67	100	232	
MUGEN MRL 2	1,00		3,9		10,2	20P-26.66	160		
MUGEN MRL 2	1,60		6,2		15,4	20P-42.44	255		
MUGEN MRL 2	0,63	800	3,1	240X7X6,5	9,4	20P-16.67	100	294	
MUGEN MRL 2	1,00		4,9		13,0	20P-26.66	160		
MUGEN MRL 2	1,60		7,8		19,6	20P-42.44	255		
MUGEN MRL 2	0,63	320	1,2	320X4X8	4,4	20P-12.53	76	157	
MUGEN MRL 2	1,00		2,0		5,9	20P-19.89	120		
MUGEN MRL 2	1,60		3,1		8,3	20P-31.83	191		
MUGEN MRL 2	0,63	400	1,5	320X4X8	5,5	20P-12.53	76	196	
MUGEN MRL 2	1,00		2,4		7,4	20P-19.89	120		
MUGEN MRL 2	1,60		3,9		10,4	20P-31.83	191		
MUGEN MRL 2	0,63	480	1,9	320X4X8	6,6	20P-12.53	76	235	
MUGEN MRL 2	1,00		2,9		8,9	20P-19.89	120		
MUGEN MRL 2	1,60		4,7		12,5	20P-31.83	191		
MUGEN MRL 2	0,63	630	2,4	320X5X8	8,6	20P-12.53	76	309	
MUGEN MRL 2	1,00		3,9		11,7	20P-19.89	120		
MUGEN MRL 2	1,60		6,2		16,4	20P-31.83	191		



21 Metre Seyir Mesafesi





21 Meter Travel Distance

2:1 Askı

2:1 Suspension





7000 Kg Statik Yük

7000 Kg Static Load

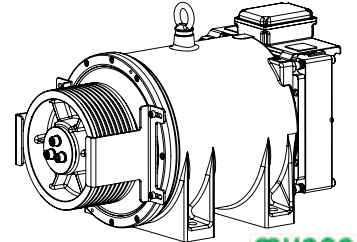

mugen
MÜGEN MRL 3

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
MUGEN MRL 3	0,63	1000	3,9	210X10X6,5	11,7	20P-19.16	115	322	210
MUGEN MRL 3	1,00		6,1		16,3	20P-30.32	182		
MUGEN MRL 3	1,60		9,8		24,5	20P-48.50	291		
MUGEN MRL 3	0,63	1275	4,9	210X11X6,5	14,9	20P-19.10	115	410	
MUGEN MRL 3	1,00		7,8		20,7	20P-30.32	182		
MUGEN MRL 3	1,60		12,5		31,2	20P-48.50	291		
MUGEN MRL 3	0,63	1000	3,9	240X8X6,5	11,7	20P-16.66	100	368	
MUGEN MRL 3	1,00		6,1		16,3	20P-26.50	159		
MUGEN MRL 3	1,60		9,8		24,5	20P-42.50	255		
MUGEN MRL 3	0,63	1275	4,9	240X9X6,5	14,9	20P-16.66	100	469	
MUGEN MRL 3	1,00		7,8		20,7	20P-26.50	159		
MUGEN MRL 3	1,60		12,5		31,2	20P-42.50	255		
MUGEN MRL 3	0,63	800	3,1	320X5X8	10,9	20P-12.66	76	392	215
MUGEN MRL 3	1,00		4,9		14,9	20P-19.89	120		
MUGEN MRL 3	1,60		7,8		20,8	20P-31.61	191		



volpi
VOLPI MRL1
1,0 M-320 KG

33 Metre Seyir Mesafesi

33 Meter Travel Distance

2:1 Askı

2:1 Suspension

7000 Kg Statik Yük

7000 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
VOLPI MRL 1	0,63	320	1,2	210X5X6,5	3,7	20P-19.10	115	103	155
VOLPI MRL 1	1,00		2,0		5,2	20P-30.33	182		
VOLPI MRL 1	1,60		3,1		7,8	20P-48.50	291		
VOLPI MRL 1	2,00		3,9		9,8	20P-60.63	364		
VOLPI MRL 1	2,50		4,9		12,2	20P-75.79	455		
VOLPI MRL 1	0,63	400	1,5	210X5X6,5	4,7	20P-19.16	115	129	
VOLPI MRL 1	1,00		2,4		6,5	20P-30.33	182		
VOLPI MRL 1	1,60		3,9		9,8	20P-48.50	291		
VOLPI MRL 1	2,00		4,9		12,2	20P-60.66	364		
VOLPI MRL 1	2,50		6,1		15,3	20P-75.79	455		
VOLPI MRL 1	0,63	320	1,2	240X4X6,5	3,7	20P-16.66	100	118	
VOLPI MRL 1	1,00		2,0		5,2	20P-26.53	159		
VOLPI MRL 1	1,60		3,1		7,8	20P-42.44	255		
VOLPI MRL 1	2,00		3,9		9,8	20P-53.05	318		
VOLPI MRL 1	2,50		4,9		12,2	20P-66.31	398		



33 Metre Seyir Mesafesi





33 Meter Travel Distance

2:1 Askı

2:1 Suspension

7000 Kg Statik Yük

7000 Kg Static Load



volpi
VOLPI MRL-2
1 M-630 KG

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Çıkış Gücü (kW) Power Output (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Kutup-Frekans Pole-Frequency	Devir (rpm) Revolution (rpm)	Tork (Nm) Torque (Nm)	Makine Ağırlığı (Kg) Machine Weight (Kg)
VOLPI MRL 2	0,63	480	1,9	210X6X6,5	5,6	20P-19.16	115	155	175
VOLPI MRL 2	1,00		2,9		7,8	20P-30.33	182		
VOLPI MRL 2	1,60		4,7		11,8	20P-48.50	291		
VOLPI MRL 2	2,00		5,9		14,7	20P-60.66	364		
VOLPI MRL 2	2,50		7,3		18,4	20P-75.79	455		
VOLPI MRL 2	0,63	630	2,4	210X7X6,5	7,4	20P-19.16	115	203	
VOLPI MRL 2	1,00		3,9		10,2	20P-30.33	182		
VOLPI MRL 2	1,60		6,2		15,4	20P-48.50	291		
VOLPI MRL 2	2,00		7,7		19,3	20P-60.66	364		
VOLPI MRL 2	2,50		9,6		24,1	20P-75.79	455		
VOLPI MRL 2	0,63	800	3,1	210x8X6,5	9,4	20P-19.16	115	258	
VOLPI MRL 2	1,00		4,9		13,0	20P-30.33	182		
VOLPI MRL 2	1,60		7,8		19,6	20P-48.50	291		
VOLPI MRL 2	2,00		9,8		24,5	20P-60.66	364		
VOLPI MRL 2	2,50		12,2		30,6	20P-75.79	455		
VOLPI MRL 2	0,63	400	1,5	240X4X6,5	4,7	20P-16.66	100	147	
VOLPI MRL 2	1,00		2,5		6,5	20P-26.53	159		
VOLPI MRL 2	1,60		3,9		9,8	20P-42.44	255		
VOLPI MRL 2	2,00		4,9		12,2	20P-53.05	318		
VOLPI MRL 2	2,50		6,1		15,3	20P-66.31	398		
VOLPI MRL 2	0,63	480	1,9	240x5x6,5	5,6	20P-16.66	100	177	
VOLPI MRL 2	1,00		2,9		7,8	20P-26.53	159		
VOLPI MRL 2	1,60		4,7		11,8	20P-42.44	255		
VOLPI MRL 2	2,00		5,9		14,7	20P-53.05	318		
VOLPI MRL 2	2,50		7,4		18,4	20P-66.31	398		
VOLPI MRL 2	0,63	630	2,4	240x6x6,5	7,4	20P-16.66	100	232	
VOLPI MRL 2	1,00		3,9		10,2	20P-26.53	159		
VOLPI MRL 2	1,60		6,2		15,4	20P-42.44	255		
VOLPI MRL 2	2,00		7,7		19,3	20P-53.05	318		
VOLPI MRL 2	2,50		9,6		24,1	20P-66.31	398		

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
VOLPI MRL 2	0,63	800	3,1	240X7X6,5	9,4	20P-16.66	100	294	175
VOLPI MRL 2	1,00		4,9		13,0	20P-26.53	159		
VOLPI MRL 2	1,60		7,8		19,6	20P-42.44	255		
VOLPI MRL 2	2,00		9,8		24,5	20P-53.05	318		
VOLPI MRL 2	2,50		12,2		30,6	20P-66.31	398		
VOLPI MRL 2	0,63	320	1,2	320x4x8	4,4	20P-12.66	76	157	215
VOLPI MRL 2	1,00		2,0		5,9	20P-19.89	120		
VOLPI MRL 2	1,60		3,1		8,3	20P-31.83	191		
VOLPI MRL 2	2,00		3,9		9,8	20P-39.66	238		
VOLPI MRL 2	2,50		4,9		12,2	20P-49.74	298		
VOLPI MRL 2	0,63	400	1,5	320x4x8	5,5	20P-12.66	76	196	
VOLPI MRL 2	1,00		2,4		7,4	20P-19.89	120		
VOLPI MRL 2	1,60		3,9		10,4	20P-31.83	191		
VOLPI MRL 2	2,00		4,9		12,2	20P-39.66	238		
VOLPI MRL 2	2,50		6,1		15,3	20P-49.74	298		
VOLPI MRL 2	0,63	480	1,9	320x4x8	6,6	20P-12.66	76	235	
VOLPI MRL 2	1,00		2,9		8,9	20P-19.89	120		
VOLPI MRL 2	1,60		4,7		12,5	20P-31.83	191		
VOLPI MRL 2	2,00		5,9		14,7	20P-39.66	239		
VOLPI MRL 2	2,50		7,3		18,4	20P-49.74	298		
VOLPI MRL 2	0,63	630	2,4	320x5x8	8,6	20P-12.66	76	309	
VOLPI MRL 2	1,00		3,9		11,7	20P-19.89	120		
VOLPI MRL 2	1,60		6,2		16,4	20P-31.83	191		
VOLPI MRL 2	2,00		7,7		19,3	20P-39.83	239		
VOLPI MRL 2	2,50		9,6		24,1	20P-49.74	298		



33 Metre Seyir Mesafesi





33 Meter Travel Distance

2:1 Askı

2:1 Suspension





7000 Kg Statik Yük

7000 Kg Static Load

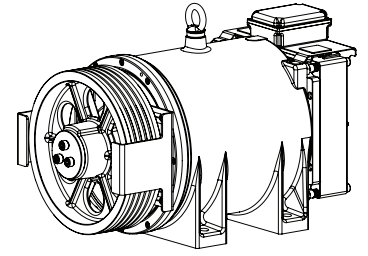

volpi
VOLPİ MRL-3
1,0 M-800 KG

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
VOLPİ MRL 3	0,63	1000	3,9	210X10X6,5	11,7	20P-19.16	115	322	210
VOLPİ MRL 3	1,00		6,1		16,3	20P-30.32	182		
VOLPİ MRL 3	1,60		9,8		24,5	20P-48.50	291		
VOLPİ MRL 3	2,00		12,2		30,6	20P-60.63	364		
VOLPİ MRL 3	2,50		15,3		38,3	20P-75.79	455		
VOLPİ MRL 3	0,63	1275	4,9	210X11X6,5	14,9	20P-19.10	115	410	
VOLPİ MRL 3	1,00		7,8		20,7	20P-30.32	182		
VOLPİ MRL 3	1,60		12,5		31,2	20P-48.50	291		
VOLPİ MRL 3	2,00		15,6		39,0	20P-60.63	364		
VOLPİ MRL 3	2,50		19,5		48,8	20P-75.79	455		
VOLPİ MRL 3	0,63	1000	3,9	240X8X6,5	11,7	20P-16.66	100	368	
VOLPİ MRL 3	1,00		6,1		16,3	20P-26.50	159		
VOLPİ MRL 3	1,60		9,8		24,5	20P-42.50	255		
VOLPİ MRL 3	2,00		12,2		30,6	20P-53.00	318		
VOLPİ MRL 3	2,50		15,3		38,3	20P-66.33	398		
VOLPİ MRL 3	0,63	1275	4,9	240X9X6,5	14,9	20P-16.66	100	469	
VOLPİ MRL 3	1,00		7,8		20,7	20P-26.50	159		
VOLPİ MRL 3	1,60		12,5		31,2	20P-42.50	255		
VOLPİ MRL 3	2,00		15,6		39,0	20P-53.00	318		
VOLPİ MRL 3	2,50		19,5		48,8	20P-66.33	398		
VOLPİ MRL 3	0,63	800	3,1	320X5X8	10,9	20P-12.66	76	392	215
VOLPİ MRL 3	1,00		4,9		14,9	20P-20.00	120		
VOLPİ MRL 3	1,60		7,8		20,8	20P-31.83	191		
VOLPİ MRL 3	2,00		9,8		24,5	20P-39.83	239		
VOLPİ MRL 3	2,50		12,2		30,6	20P-49.74	298		

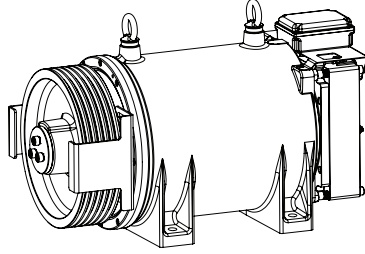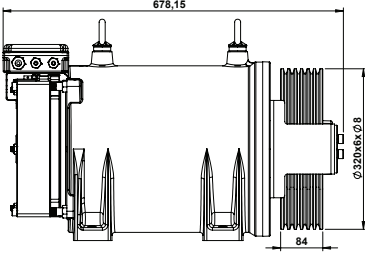

volpi
VOLPI MRL-4
1,0 M-1000 KG



33 Metre Seyir Mesafesi

33 Meter Travel Distance

2:1 Askı

2:1 Suspension

7000 Kg Statik Yük

7000 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
VOLPİ MRL 4	0,63	1600	6,2	210X13X6,5	18,7	20P-19.16	115	515	270
VOLPİ MRL 4	1,00		9,8		26,0	20P-30.33	182		
VOLPİ MRL 4	1,60		15,7		39,2	20P-48.50	291		
VOLPİ MRL 4	2,00		19,6		49,0	20P-60.66	364		
VOLPİ MRL 4	2,50		24,5		61,2	20P-75.79	455		
VOLPİ MRL 4	0,63	1600	6,2	240X11X6,5	18,7	20P-16.66	100	589	
VOLPİ MRL 4	1,00		9,8		26,0	20P-26.53	159		
VOLPİ MRL 4	1,60		15,7		39,2	20P-42.44	255		
VOLPİ MRL 4	2,00		19,6		49,0	20P-53.05	318		
VOLPİ MRL 4	2,50		24,5		61,2	20P-66.31	398		
VOLPİ MRL 4	0,63	1000	3,9	320X6X8	13,7	20P-12.66	76	491	275
VOLPİ MRL 4	1,00		6,1		18,6	20P-20.00	120		
VOLPİ MRL 4	1,60		9,8		26,0	20P-31.83	191		
VOLPİ MRL 4	2,00		12,2		30,6	20P-39.83	239		
VOLPİ MRL 4	2,50		15,3		38,3	20P-49.66	298		
VOLPİ MRL 4	0,63	1275	4,9	320X7X8	17,4	20P-12.66	76	625	
VOLPİ MRL 4	1,00		7,8		23,7	20P-20.00	120		
VOLPİ MRL 4	1,60		12,5		33,2	20P-31.83	191		
VOLPİ MRL 4	2,00		15,6		39,0	20P-39.83	239		
VOLPİ MRL 4	2,50		19,5		48,8	20P-49.66	298		



33 Metre Seyir Mesafesi





33 Meter Travel Distance

2:1 Askı

2:1 Suspension





7000 Kg Statik Yük

7000 Kg Static Load

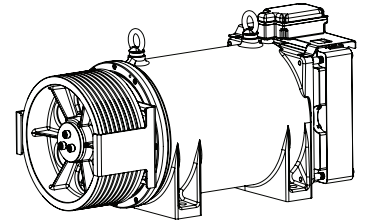

volpi
VOLPI MRL-5
1,0 M-1600 KG

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
VOLPI MRL 5	0,63	1600	6,2	320X9X8	21,9	20P-12.66	76	785	310
VOLPI MRL 5	1,00		9,8		29,7	20P-19.89	120		
VOLPI MRL 5	1,60		15,7		41,6	20P-31.83	191		
VOLPI MRL 5	2,00		19,6		49,0	20P-39.83	239		
VOLPI MRL 5	2,50		24,5		61,2	20P-49.66	298		



volpi
VOLPI MRL 2-2
1,0 M-800 KG

33 Metre Seyir Mesafesi

33 Meter Travel Distance

2:1 Askı



2:1 Suspension

7000 Kg Statik Yük

7000 Kg Static Load



Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
VOLPİ MRL 2-2	0,63	630	2,4	320X6X8	8,6	20P-12.53	75	309	240
VOLPİ MRL 2-2	1,00		3,9		11,7	20P-20.00	120		
VOLPİ MRL 2-2	1,60		6,2		16,4	20P-31.83	191		
VOLPİ MRL 2-2	2,00		7,7		19,3	20P-39.83	239		
VOLPİ MRL 2-2	2,50		9,6		24,1	20P-49.66	298		
VOLPİ MRL 2-2	0,63	800	3,1	320X7X8	10,9	20P-12.53	75	392	
VOLPİ MRL 2-2	1,00		4,9		14,9	20P-20.00	120		
VOLPİ MRL 2-2	1,60		7,8		20,8	20P-31.83	191		
VOLPİ MRL 2-2	2,00		9,8		24,5	20P-39.83	239		
VOLPİ MRL 2-2	2,50		12,2		30,6	20P-49.66	298		
VOLPİ MRL 2-2	0,63	1000	3,9	320X8X8	13,7	20P-12.53	75	491	
VOLPİ MRL 2-2	1,00		6,1		18,6	20P-20.00	120		
VOLPİ MRL 2-2	1,60		9,8		26,0	20P-31.83	191		
VOLPİ MRL 2-2	2,00		12,2		30,6	20P-39.83	239		
VOLPİ MRL 2-2	2,50		15,3		38,3	20P-49.66	298		
VOLPİ MRL 2-2	0,63	630	2,4	360X5X8	8,6	20P-11.14	67	348	
VOLPİ MRL 2-2	1,00		3,9		11,7	20P-17.66	106		
VOLPİ MRL 2-2	1,60		6,2		16,4	20P-28.33	170		
VOLPİ MRL 2-2	2,00		7,7		19,3	20P-35.33	212		
VOLPİ MRL 2-2	2,50		9,6		24,1	20P-44.16	265		
VOLPİ MRL 2-2	0,63	800	3,1	360X6X8	10,9	20P-11.14	67	441	
VOLPİ MRL 2-2	1,00		4,9		14,9	20P-17.66	106		
VOLPİ MRL 2-2	1,60		7,8		20,8	20P-28.33	170		
VOLPİ MRL 2-2	2,00		9,8		24,5	20P-35.33	212		
VOLPİ MRL 2-2	2,50		12,2		30,5	20P-44.16	265		
VOLPİ MRL 2-2	0,63	630	2,4	400X4X10	8,6	20P-10.00	60	386	
VOLPİ MRL 2-2	1,00		3,9		13,7	20P-16.00	96		
VOLPİ MRL 2-2	1,60		6,2		16,4	20P-25.50	153		
VOLPİ MRL 2-2	2,00		7,7		20,5	20P-31.83	191		
VOLPİ MRL 2-2	2,50		9,6		24,1	20P-39.83	239		
VOLPİ MRL 2-2	0,63	800	3,1	400X5X10	10,9	20P-10.00	60	491	
VOLPİ MRL 2-2	1,00		4,9		17,3	20P-16.00	96		
VOLPİ MRL 2-2	1,60		7,8		20,8	20P-25.50	153		
VOLPİ MRL 2-2	2,00		9,8		26,0	20P-31.83	191		
VOLPİ MRL 2-2	2,50		12,2		30,6	20P-39.83	239		



33 Metre Seyir Mesafesi



33 Meter Travel Distance

2:1 Askı

2:1 Suspension


7000 Kg Statik Yük

7000 Kg Static Load



volpi
VOLPI MRL_2-3
1,0 M-1000 KG

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
VOLPI MRL 2-3	0,63	1275	4,9	320X10X8	17,4	20P-12.53	75	625	290
VOLPI MRL 2-3	1,00		7,8		23,7	20P-20.00	120		
VOLPI MRL 2-3	1,60		12,5		33,2	20P-31.83	191		
VOLPI MRL 2-3	2,00		15,6		39,0	20P-39.83	239		
VOLPI MRL 2-3	2,50		19,5		48,8	20P-49.66	298		
VOLPI MRL 2-3	0,63	1600	6,2	320X11X8	21,9	20P-12.53	75	785	
VOLPI MRL 2-3	1,00		9,8		29,7	20P-20.00	120		
VOLPI MRL 2-3	1,60		15,7		41,6	20P-31.83	191		
VOLPI MRL 2-3	2,00		19,6		49,0	20P-39.83	239		
VOLPI MRL 2-3	2,50		24,5		61,2	20P-49.66	298		
VOLPI MRL 2-3	0,63	1000	3,9	360X7X8	13,7	20P-11.14	67	552	300
VOLPI MRL 2-3	1,00		6,1		18,6	20P-17.68	106		
VOLPI MRL 2-3	1,60		9,8		26,0	20P-28.29	170		
VOLPI MRL 2-3	2,00		12,2		30,6	20P-35.37	212		
VOLPI MRL 2-3	2,50		15,3		38,3	20P-44.21	265		
VOLPI MRL 2-3	0,63	1275	4,9	360X8X8	17,4	20P-11.14	67	704	
VOLPI MRL 2-3	1,00		7,8		23,7	20P-17.68	106		
VOLPI MRL 2-3	1,60		12,5		33,2	20P-28.29	170		
VOLPI MRL 2-3	2,00		15,6		39,0	20P-35.37	212		
VOLPI MRL 2-3	2,50		19,5		48,8	20P-44.21	265		
VOLPI MRL 2-3	0,63	1000	3,9	400X5X10	13,7	20P-10.03	60	613	310
VOLPI MRL 2-3	1,00		6,1		21,7	20P-15.92	95		
VOLPI MRL 2-3	1,60		9,8		26,0	20P-25.46	153		
VOLPI MRL 2-3	2,00		12,2		32,5	20P-31.83	191		
VOLPI MRL 2-3	2,50		15,3		38,3	20P-39.80	239		
VOLPI MRL 2-3	0,63	1275	4,9	400X6X10	17,4	20P-10.03	60	782	310
VOLPI MRL 2-3	1,00		7,8		27,6	20P-15.92	95		
VOLPI MRL 2-3	1,60		12,5		33,2	20P-25.46	153		
VOLPI MRL 2-3	2,00		15,6		41,5	20P-31.83	191		
VOLPI MRL 2-3	2,50		19,5		48,8	20P-39.80	239		

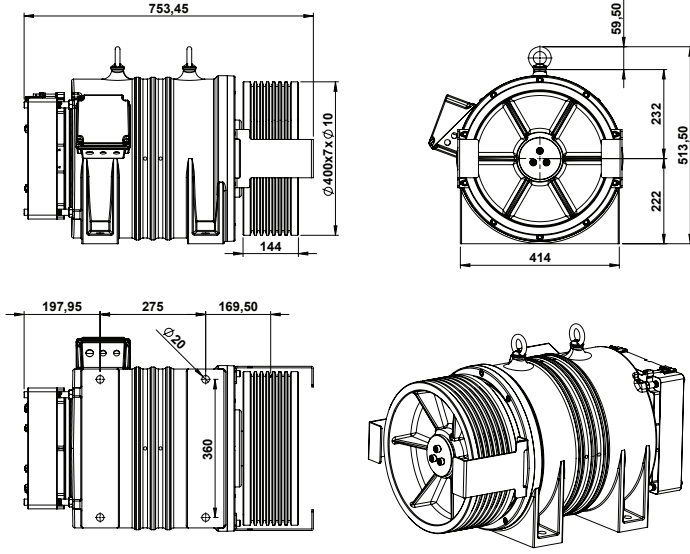

VOLPI
VOLPI MRL 2-4
1,0 M-1600 kg

33 Metre Seyir Mesafesi

33 Meter Travel Distance

2:1 Askı

2:1 Suspension

9000 Kg Statik Yük

9000 Kg Static Load



Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
VOLPI MRL 2-4	0,63	2000	7,7	320X12X8	23,8	20P-12.53	75	981	380
VOLPI MRL 2-4	1,00		12,2		35,1	20P-19.89	119		
VOLPI MRL 2-4	1,60		19,6		49,1	20P-31.83	191		
VOLPI MRL 2-4	2,00		24,5		57,8	20P-39.79	239		
VOLPI MRL 2-4	2,50		30,6		72,3	20P-49.74	298		
VOLPI MRL 2-4	0,63	1600	6,2	360X10X8	21,9	20P-11.14	67	883	385
VOLPI MRL 2-4	1,00		9,8		29,7	20P-17.68	106		
VOLPI MRL 2-4	1,60		15,7		41,6	20P-28.29	170		
VOLPI MRL 2-4	2,00		19,6		49,0	20P-35.37	212		
VOLPI MRL 2-4	2,50		24,5		61,2	20P-44.21	265		
VOLPI MRL 2-4	0,63	1600	6,2	400X7X10	21,9	20P-10.03	60	981	390
VOLPI MRL 2-4	1,00		9,8		34,7	20P-15.92	95		
VOLPI MRL 2-4	1,60		15,7		41,6	20P-25.46	153		
VOLPI MRL 2-4	2,00		19,6		52,0	20P-31.83	191		
VOLPI MRL 2-4	2,50		24,5		61,2	20P-39.80	239		



33 Metre Seyir Mesafesi





33 Meter Travel Distance

2:1 Askı

2:1 Suspension





9000 Kg Statik Yük

9000 Kg Static Load

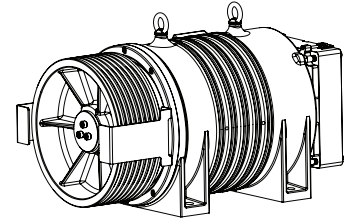

volpi
VOLPI MRL 2-5
1,0 M-2000 KG

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Çıkış Gücü (kW) Power Output (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Kutup-Frekans Pole-Frequency	Devir (rpm) Revolution (rpm)	Tork (Nm) Torque (Nm)	Makine Ağırlığı (Kg) Machine Weight (Kg)
VOLPI MRL 2-5	0,63	2500	9,6	320X14X8	29,8	20P-12.53	75	1226	430
VOLPI MRL 2-5	1,00		15,3		43,9	20P-19.90	119		
VOLPI MRL 2-5	1,60		24,5		61,4	20P-31.83	191		
VOLPI MRL 2-5	2,00		30,6		72,3	20P-39.79	239		
VOLPI MRL 2-5	2,50		38,3		90,3	20P-49.74	298		
VOLPI MRL 2-5	0,63	2000	7,7	360X11X8	23,8	20P-11.14	67	1104	435
VOLPI MRL 2-5	1,00		12,2		35,1	20P-17.68	106		
VOLPI MRL 2-5	1,60		19,6		49,1	20P-28.29	170		
VOLPI MRL 2-5	2,00		24,5		57,8	20P-35.37	212		
VOLPI MRL 2-5	2,50		30,6		72,3	20P-44.21	265		
VOLPI MRL 2-5	0,63	2000	7,7	400X8X10	23,8	20P-10.03	60	1226	440
VOLPI MRL 2-5	1,00		12,2		37,8	20P-15.92	96		
VOLPI MRL 2-5	1,60		19,6		49,1	20P-25.46	153		
VOLPI MRL 2-5	2,00		24,5		61,4	20P-31.83	191		
VOLPI MRL 2-5	2,50		30,6		72,3	20P-39.79	239		

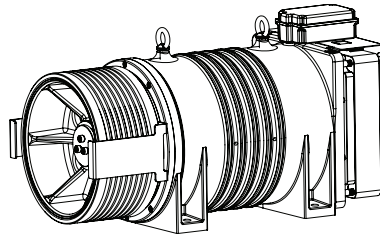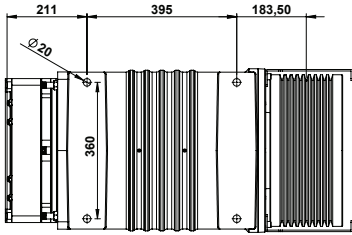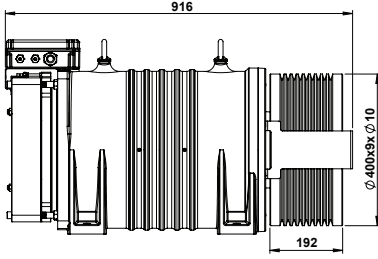

volpi
VOLPI MRL 2-6
1,0 M-2500 KG



33 Metre Seyir Mesafesi

33 Meter Travel Distance

2:1 Askı

2:1 Suspension

9000 Kg Statik Yük

9000 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
VOLPI MRL 2-6	0,63	3000	11,6	320X17X8	35,7	20P-12.53	75	1472	545
VOLPI MRL 2-6	1,00		18,4		52,7	20P-19.89	120		
VOLPI MRL 2-6	1,60		29,4		73,7	20P-31.83	191		
VOLPI MRL 2-6	2,00		36,7		86,7	20P-39.79	239		
VOLPI MRL 2-6	2,50		45,9		108,4	20P-49.74	298		
VOLPI MRL 2-6	0,63	2500	9,6	360X13X8	29,8	20P-11.14	67	1380	550
VOLPI MRL 2-6	1,00		15,3		43,9	20P-17.68	106		
VOLPI MRL 2-6	1,60		24,5		61,4	20P-28.29	170		
VOLPI MRL 2-6	2,00		30,6		72,3	20P-35.37	212		
VOLPI MRL 2-6	2,50		38,3		90,3	20P-44.21	265		
VOLPI MRL 2-6	0,63	2500	9,6	400X9X10	29,8	20P-10.03	60	1533	560
VOLPI MRL 2-6	1,00		15,3		47,3	20P-15.92	96		
VOLPI MRL 2-6	1,60		24,5		61,4	20P-25.46	153		
VOLPI MRL 2-6	2,00		30,6		76,8	20P-31.83	191		
VOLPI MRL 2-6	2,50		38,3		90,3	20P-39.79	239		



33 Metre Seyir Mesafesi





33 Meter Travel Distance

2:1 Askı

2:1 Suspension





9000 Kg Statik Yük

9000 Kg Static Load

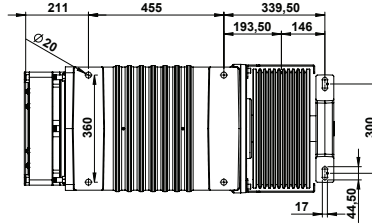

volpi
VOLPI MRL 2-7
1,0 M-3000 KG

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Çıkış Gücü (kW) Power Output (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Kutup-Frekans Pole-Frequency	Devir (rpm) Revolution (rpm)	Tork (Nm) Torque (Nm)	Makine Ağırlığı (Kg) Machine Weight (Kg)
VOLPI MRL 2-7	0,63	3500	13,5	320X19X8	41,7	20P-12.53	75	1717	590
VOLPI MRL 2-7	1,00		21,4		61,4	20P-19.89	120		
VOLPI MRL 2-7	1,60		34,3		86,0	20P-31.83	191		
VOLPI MRL 2-7	2,00		42,8		101,2	20P-39.79	239		
VOLPI MRL 2-7	2,50		53,6		126,5	20P-49.74	289		
VOLPI MRL 2-7	0,63	3000	11,6	360X15X8	35,7	20P-11.14	67	1655	605
VOLPI MRL 2-7	1,00		18,4		52,7	20P-17.68	106		
VOLPI MRL 2-7	1,60		29,4		73,7	20P-28.29	170		
VOLPI MRL 2-7	2,00		36,7		86,7	20P-35.37	212		
VOLPI MRL 2-7	2,50		45,9		108,4	20P-44.21	265		
VOLPI MRL 2-7	0,63	3000	11,6	400X11X10	35,7	20P-10.03	60	1839	615
VOLPI MRL 2-7	1,00		18,4		56,7	20P-15.92	95		
VOLPI MRL 2-7	1,60		29,4		73,7	20P-25.46	153		
VOLPI MRL 2-7	2,00		36,7		92,1	20P-31.83	191		
VOLPI MRL 2-7	2,50		45,9		108,4	20P-39.80	239		

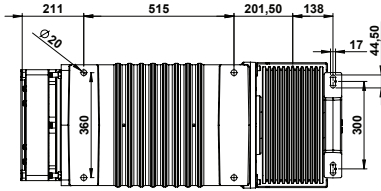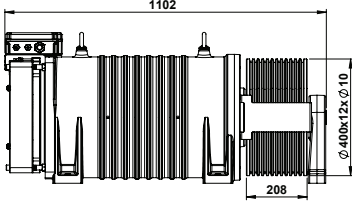

VOLPI
VOLPI MRL 2-8
1,0 M-3500 KG

33 Metre Seyir Mesafesi

33 Meter Travel Distance

2:1 Askı

2:1 Suspension

9000 Kg Statik Yük

9000 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
VOLPI MRL 2-8	0,63	3500	13,5	360X17X8	41,7	20P-11.14	67	1931	655
VOLPI MRL 2-8	1,00		21,4		61,4	20P-17.68	106		
VOLPI MRL 2-8	1,60		34,3		86,0	20P-28.29	170		
VOLPI MRL 2-8	2,00		42,8		101,2	20P-35.37	212		
VOLPI MRL 2-8	2,50		53,6		126,5	20P-44.21	265		
VOLPI MRL 2-8	0,63	3500	13,5	400X12X10	41,7	20P-10.03	60	2146	670
VOLPI MRL 2-8	1,00		21,4		66,2	20P-15.92	96		
VOLPI MRL 2-8	1,60		34,3		86,0	20P-25.46	153		
VOLPI MRL 2-8	2,00		42,8		107,5	20P-31.83	191		
VOLPI MRL 2-8	2,50		53,6		126,5	20P-39.79	239		

**51 Metre Seyir Mesafesi**





51 Meter Travel Distance

2:1 Askı

2:1 Suspension

7000 Kg Statik Yük





7000 Kg Static Load




AK1

1,0 M-320 KG

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Çıkış Gücü (kW) Power Output (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Kutup-Frekans Pole-Frequency	Devir (rpm) Revolution (rpm)	Tork (Nm) Torque (Nm)	Makine Ağırlığı (Kg) Machine Weight (Kg)
AK 1	0,63	320	1,2	210X5X6,5	3,7	20P-19.16	115	103	155
AK 1	1,00		2,0		5,2	20P-30.32	182		
AK 1	1,60		3,1		7,8	20P-48.50	291		
AK 1	2,00		3,9		9,8	20P-60.63	364		
AK 1	2,50		4,9		12,2	20P-75.83	455		
AK 1	0,63	400	1,5	210X5X6,5	4,7	20P-19.16	115	129	
AK 1	1,00		2,4		6,5	20P-30.32	182		
AK 1	1,60		3,9		9,8	20P-48.50	291		
AK 1	2,00		4,9		12,2	20P-60.63	364		
AK 1	2,50		6,1		15,3	20P-75.83	455		
AK 1	0,63	320	1,2	240X4X6,5	3,7	20P-16.71	100	118	
AK 1	1,00		2,0		5,2	20P-26.53	160		
AK 1	1,60		3,1		7,8	20P-42.44	255		
AK 1	2,00		3,9		9,8	20P-53.16	318		
AK 1	2,50		4,9		12,2	20P-66.33	398		



AKIS
AK2
1,0 M-630 KG



51 Metre Seyir Mesafesi

51 Meter Travel Distance

2:1 Askı





2:1 Suspension

7000 Kg Statik Yük

7000 Kg Static Load

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Çıkış Gücü (kW) Power Output (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Kutup-Frekans Pole-Frequency	Devir (rpm) Revolution (rpm)	Tork (Nm) Torque (Nm)	Makine Ağırlığı (Kg) Machine Weight (Kg)
AK 2	0,63	480	1,9	210X6X6,5	5,6	20P-19.16	115	155	175
AK 2	1,00		2,9		7,8	20P-30.32	182		
AK 2	1,60		4,7		11,8	20P-48.50	291		
AK 2	2,00		5,9		14,7	20P-60.63	364		
AK 2	2,50		7,3		18,4	20P-75.83	455		
AK 2	0,63	630	2,4	210X7X6,5	7,4	20P-19.16	115	203	
AK 2	1,00		3,9		10,2	20P-30.32	182		
AK 2	1,60		6,2		15,4	20P-48.50	291		
AK 2	2,00		7,7		19,3	20P-60.63	364		
AK 2	2,50		9,6		24,1	20P-75.83	455		
AK 2	0,63	800	3,1	210X8X6,5	9,4	20P-19.16	115	258	
AK 2	1,00		4,9		13,0	20P-30.32	182		
AK 2	1,60		7,8		19,6	20P-48.50	291		
AK 2	2,00		9,8		24,5	20P-60.63	364		
AK 2	2,50		12,2		30,6	20P-75.83	455		
AK 2	0,63	400	1,5	240x4x6,5	4,7	20P-16.67	100	147	
AK 2	1,00		2,4		6,5	20P-26.66	160		
AK 2	1,60		3,9		9,8	20P-42.44	255		
AK 2	2,00		4,9		12,2	20P-53.16	319		
AK 2	2,50		6,1		15,3	20P-66.33	398		
AK 2	0,63	480	1,9	240x5x6,5	5,6	20P-16.67	100	177	
AK 2	1,00		2,9		7,8	20P-26.66	160		
AK 2	1,60		4,7		11,8	20P-42.44	255		
AK 2	2,00		5,9		14,7	20P-53.16	319		
AK 2	2,50		7,3		18,4	20P-66.33	398		
AK 2	0,63	630	2,4	240x6x6,5	7,4	20P-16.67	100	232	
AK 2	1,00		3,9		10,2	20P-26.66	160		
AK 2	1,60		6,2		15,4	20P-42.44	255		
AK 2	2,00		7,7		19,3	20P-53.16	319		
AK 2	2,50		9,6		24,1	20P-66.33	398		

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
AK 2	0,63	320	1,2	320x4x8	4,4	20P-12.53	76	157	215
AK 2	1,00		2,0		5,9	20P-19.89	120		
AK 2	1,60		3,1		8,3	20P-31.83	191		
AK 2	2,00		3,9		9,8	20P-39.79	239		
AK 2	2,50		4,9		12,2	20P-49.74	299		
AK 2	0,63	400	1,5	320x4x8	5,5	20P-12.53	75	196	
AK 2	1,00		2,4		7,4	20P-19.89	120		
AK 2	1,60		3,9		10,4	20P-31.83	191		
AK 2	2,00		4,9		12,2	20P-39.79	239		
AK 2	2,50		6,1		15,3	20P-49.74	299		
AK 2	0,63	480	1,9	320x4x8	6,6	20P-12.50	75	235	
AK 2	1,00		2,9		8,9	20P-20.00	120		
AK 2	1,60		4,7		12,5	20P-31.83	191		
AK 2	2,00		5,9		14,7	20P-39.83	239		
AK 2	2,50		7,4		18,4	20P-49.66	298		



AKIS
AK3
1,0 M-800 KG


51 Metre Seyir Mesafesi

51 Meter Travel Distance

2:1 Askı

2:1 Suspension

7000 Kg Statik Yük

7000 Kg Static Load

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Çıkış Gücü (kW) Power Output (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Kutup-Frekans Pole-Frequency	Devir (rpm) Revolution (rpm)	Tork (Nm) Torque (Nm)	Makine Ağırlığı (Kg) Machine Weight (Kg)
AK 3	0,63	1000	3,9	210X9X6,5	11,7	20P-19.16	115	322	210
AK 3	1,00		6,1		16,3	20P-30.32	182		
AK 3	1,60		9,8		24,5	20P-48.50	291		
AK 3	2,00		12,2		30,6	20P-60.63	364		
AK 3	2,50		15,3		38,3	20P-75.83	455		
AK 3	0,63	800	3,1	240X7X6,5	9,4	20P-16.71	100	294	
AK 3	1,00		4,9		13,0	20P-26.53	160		
AK 3	1,60		7,8		19,6	20P-42.44	255		
AK 3	2,00		9,8		24,5	20P-53.05	319		
AK 3	2,50		12,2		30,6	20P-66.31	398		
AK 3	0,63	1000	3,9	240X8X6,5	11,7	20P-16.71	100	368	
AK 3	1,00		6,1		16,3	20P-26.53	160		
AK 3	1,60		9,8		24,5	20P-42.44	255		
AK 3	2,00		12,2		30,6	20P-53.06	319		
AK 3	2,50		15,3		38,3	20P-66.31	398		
AK 3	0,63	800	3,1	320X5X8	10,9	20P-12.53	76	392	
AK 3	1,00		4,9		14,9	20P-19.89	120		
AK 3	1,60		7,8		20,8	20P-31.83	191		
AK 3	2,00		9,8		24,5	20P-39.79	239		
AK 3	2,50		12,2		30,6	20P-49.74	299		
AK 3	0,63	630	2,4	320X5X8	8,6	20P-12.53	75	309	
AK 3	1,00		3,9		11,7	20P-19.89	119		
AK 3	1,60		6,2		16,4	20P-31.83	191		
AK 3	2,00		7,7		19,3	20P-39.79	239		
AK 3	2,50		9,6		24,1	20P-49.74	298		

**51 Metre Seyir Mesafesi**


51 Meter Travel Distance

2:1 Askı

2:1 Suspension



7000 Kg Statik Yük

7000 Kg Static Load

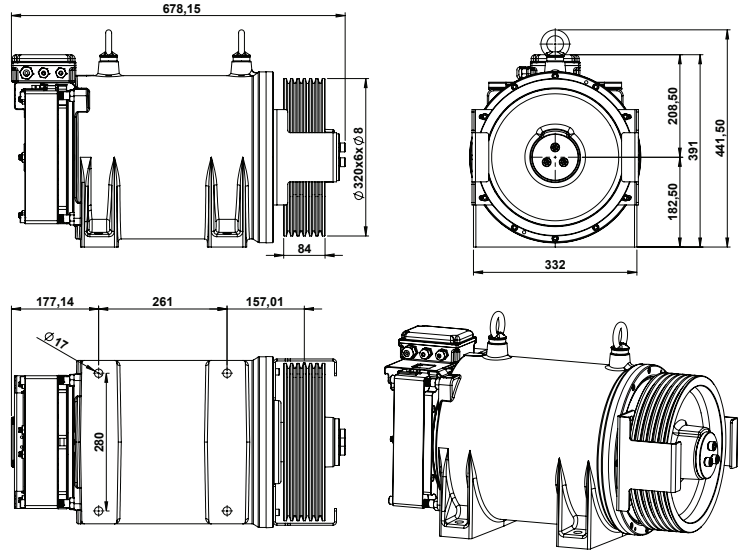

AKIS
 AK4
 1,0 M-1000 KG

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Çıkış Gücü (kW) Power Output (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Kutup-Frekans Pole-Frequency	Devir (rpm) Revolution (rpm)	Tork (Nm) Torque (Nm)	Makine Ağırlığı (Kg) Machine Weight (Kg)
AK 4	0,63	1275	4,9	210X11X6,5	14,9	20P-19.16	115	410	270
AK 4	1,00		7,8		20,7	20P-30.32	182		
AK 4	1,60		12,5		31,2	20P-48.50	291		
AK 4	2,00		15,6		39,0	20P-60.63	364		
AK 4	2,50		19,5		48,8	20P-75.83	455		
AK 4	0,63	1600	6,2	210X13X6,5	18,7	20P-19.16	115	515	
AK 4	1,00		9,8		26,0	20P-30.32	182		
AK 4	1,60		15,7		39,2	20P-48.50	291		
AK 4	2,00		19,6		49,0	20P-60.63	364		
AK 4	2,50		24,5		61,2	20P-75.83	455		
AK 4	0,63	1275	4,9	240X9X6,5	14,9	20P-16.71	100	469	
AK 4	1,00		7,8		20,7	20P-26.53	160		
AK 4	1,60		12,5		31,2	20P-42.44	255		
AK 4	2,00		15,6		39,0	20P-53.16	318		
AK 4	2,50		19,5		48,8	20P-66.33	398		
AK 4	0,63	1000	3,9	320X6X8	13,7	20P-12.53	76	491	
AK 4	1,00		6,1		18,6	20P-19.89	120		
AK 4	1,60		9,8		26,0	20P-31.83	191		
AK 4	2,00		12,2		30,6	20P-39.79	239		
AK 4	2,50		15,3		38,3	20P-49.74	299		

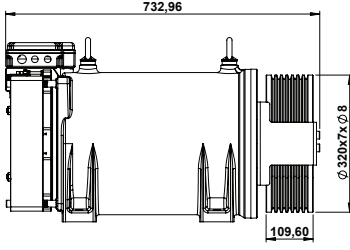
51 Metre Seyir Mesafesi



51 Meter Travel Distance

2:1 Askı



2:1 Suspension

7000 Kg Statik Yük

7000 Kg Static Load



Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Çıkış Gücü (kW) Power Output (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Kutup-Frekans Pole-Frequency	Devir (rpm) Revolution (rpm)	Tork (Nm) Torque (Nm)	Makine Ağırlığı (Kg) Machine Weight (Kg)
AK 5	0,63	1600	6,2	240X11X6,5	18,7	20P-16.71	100	589	305
AK 5	1,00		9,8		26,0	20P-26.53	160		
AK 5	1,60		15,7		39,2	20P-42.44	255		
AK 5	2,00		19,6		49,0	20P-53.16	318		
AK 5	2,50		24,5		61,2	20P-66.33	398		
AK 5	0,63	1275	4,9	320X7X8	17,4	20P-12.53	76	625	310
AK 5	1,00		7,8		23,7	20P-19.89	120		
AK 5	1,60		12,5		33,2	20P-31.83	191		
AK 5	2,00		15,6		39,0	20P-39.79	239		
AK 5	2,50		19,5		48,8	20P-49.74	299		

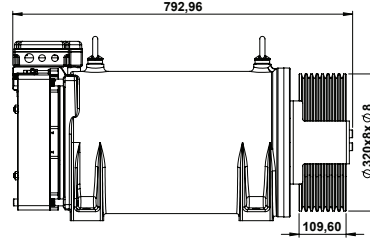**51 Metre Seyir Mesafesi**



51 Meter Travel Distance

2:1 Askı





2:1 Suspension

7000 Kg Statik Yük

7000 Kg Static Load

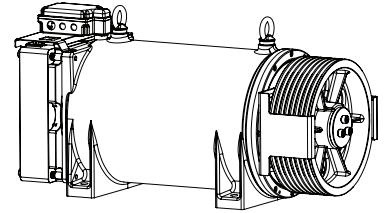

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Çıkış Gücü (kW) Power Output (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Kutup-Frekans Pole-Frequency	Devir (rpm) Revolution (rpm)	Tork (Nm) Torque (Nm)	Makine Ağırlığı (Kg) Machine Weight (Kg)
AK 6	0,63	1600	6,2	320X8X8	21,9	20P-12.53	75	785	345
AK 6	1,00		9,8		29,7	20P-19,89	119		
AK 6	1,60		15,7		41,6	20P-31.83	191		
AK 6	2,00		19,6		49,0	20P-39.79	239		
AK 6	2,50		24,5		61,2	20P-49.74	298		


51 Metre Seyir Mesafesi

51 Meter Travel Distance

2:1 Askı





2:1 Suspension

7000 Kg Statik Yük

7000 Kg Static Load



Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
AK 2-2	0,63	630	2,4	320X6X8	8,6	20P-12.53	75	309	240
AK 2-2	1,00		3,9		11,7	20P-19.89	119		
AK 2-2	1,60		6,2		16,4	20P-31.83	191		
AK 2-2	2,00		7,7		19,3	20P-39.79	239		
AK 2-2	2,50		9,6		24,1	20P-49.74	298		
AK 2-2	0,63	800	3,1	320X7X8	10,9	20P-12.53	75	392	
AK 2-2	1,00		4,9		14,9	20P-19.89	119		
AK 2-2	1,60		7,8		20,8	20P-31.83	191		
AK 2-2	2,00		9,8		24,5	20P-39.79	239		
AK 2-2	2,50		12,2		30,6	20P-49.74	298		
AK 2-2	0,63	630	2,4	360X5X8	8,6	20P-11.14	66	348	250
AK 2-2	1,00		3,9		11,7	20P-17.68	106		
AK 2-2	1,60		6,2		16,4	20P-28.29	170		
AK 2-2	2,00		7,7		19,3	20P-35.37	212		
AK 2-2	2,50		9,6		24,1	20P-44.21	265		
AK 2-2	0,63	800	3,1	360X6X8	10,9	20P-11.14	67	441	
AK 2-2	1,00		4,9		14,9	20P-17.68	106		
AK 2-2	1,60		7,8		20,8	20P-28.29	170		
AK 2-2	2,00		9,8		24,5	20P-35.37	212		
AK 2-2	2,50		12,2		30,6	20P-44.21	265		
AK 2-2	0,63	630	2,4	400X4X10	8,6	20P-10.03	60	386	260
AK 2-2	1,00		3,9		13,7	20P-15.92	95		
AK 2-2	1,60		6,2		16,4	20P-25.46	153		
AK 2-2	2,00		7,7		20,5	20P-31.83	191		
AK 2-2	2,50		9,6		24,1	20P-39.79	239		

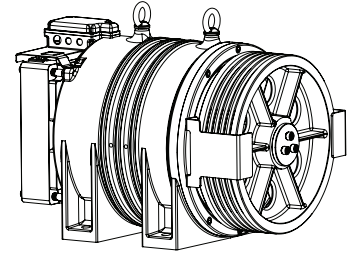**51 Metre Seyir Mesafesi**

51 Meter Travel Distance

2:1 Askı

2:1 Suspension

7000 Kg Statik Yük




7000 Kg Static Load



AK 2-3

1,0 M-800 KG

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Çıkış Gücü (kW) Power Output (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Kutup-Frekans Pole-Frequency	Devir (rpm) Revolution (rpm)	Tork (Nm) Torque (Nm)	Makine Ağırlığı (Kg) Machine Weight (Kg)
AK 2-3	0,63	1000	3,9	320X8X8	13,7	20P-12.53	75	491	310
AK 2-3	1,00		6,1		18,6	20P-19.89	119		
AK 2-3	1,60		9,8		26,0	20P-31.83	191		
AK 2-3	2,00		12,2		30,6	20P-39.79	239		
AK 2-3	2,50		15,3		38,3	20P-49.74	298		
AK 2-3	0,63	1275	4,9	320X10X8	17,4	20P-12.53	75	625	
AK 2-3	1,00		7,8		23,7	20P-19.89	120		
AK 2-3	1,60		12,5		33,2	20P-31.83	191		
AK 2-3	2,00		15,6		39,0	20P-39.79	239		
AK 2-3	2,50		19,5		48,8	20P-49.74	298		
AK 2-3	0,63	1000	3,9	360X7X8	13,7	20P-11.14	67	552	320
AK 2-3	1,00		6,1		18,6	20P-17.68	106		
AK 2-3	1,60		9,8		26,0	20P-28.29	170		
AK 2-3	2,00		12,2		30,6	20P-35.37	212		
AK 2-3	2,50		15,3		38,3	20P-44.21	265		
AK 2-3	0,63	800	3,1	400X5X10	10,9	20P-10.03	60	491	330
AK 2-3	1,00		4,9		17,3	20P-15.92	96		
AK 2-3	1,60		7,8		20,8	20P-25.46	153		
AK 2-3	2,00		9,8		26,0	20P-31.83	191		
AK 2-3	2,50		12,2		30,6	20P-39.79	239		
AK 2-3	0,63	1000	3,9	400X5X10	13,7	20P-10.03	60	613	
AK 2-3	1,00		6,1		21,7	20P-15.92	95		
AK 2-3	1,60		9,8		26,0	20P-25.46	153		
AK 2-3	2,00		12,2		32,5	20P-31.83	191		
AK 2-3	2,50		15,3		38,3	20P-39.79	239		

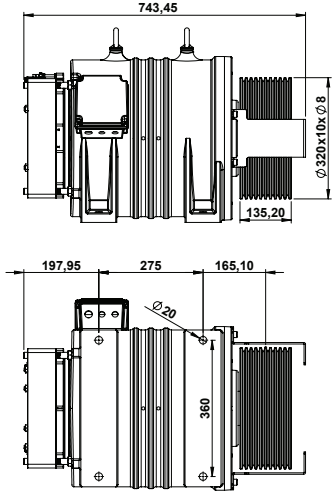
51 Metre Seyir Mesafesi

51 Meter Travel Distance

2:1 Askı

2:1 Suspension

9000 Kg Statik Yük

9000 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)	
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)	
AK 2-4	0,63	1600	6,2	320X10X8	19,1	20P-12.53	75	785	375	
AK 2-4	1,00		9,8		28,1	20P-19.89	119			
AK 2-4	1,60		15,7		39,3	20P-31.83	191			
AK 2-4	2,00		19,6		46,2	20P-39.79	239			
AK 2-4	2,50		24,5		57,8	20P-49.74	298			
AK 2-4	0,63	1275	4,9	360X8X8	15,2	20P-11.14	67	704	385	
AK 2-4	1,00		7,8		22,4	20P-17.68	106			
AK 2-4	1,60		12,5		31,3	20P-28.29	170			
AK 2-4	2,00		15,6		36,9	20P-35.37	212			
AK 2-4	2,50		19,5		46,1	20P-44.21	265			
AK 2-4	0,63	1600	6,2	360X9X8	19,1	20P-11.14	67	883	390	
AK 2-4	1,00		9,8		28,1	20P-17.68	106			
AK 2-4	1,60		15,7		39,3	20P-28.29	170			
AK 2-4	2,00		19,6		46,2	20P-35.37	212			
AK 2-4	2,50		24,5		57,8	20P-44.21	265			
AK 2-4	0,63	1275	4,9	400X6X10	15,2	20P-10.03	60	782		
AK 2-4	1,00		7,8		24,1	20P-15.92	95			
AK 2-4	1,60		12,5		31,3	20P-25.46	153			
AK 2-4	2,00		15,6		39,2	20P-31.83	191			
AK 2-4	2,50		19,5		46,1	20P-39.79	239			

**51 Metre Seyir Mesafesi**





51 Meter Travel Distance

2:1 Askı

2:1 Suspension

9000 Kg Statik Yük





9000 Kg Static Load

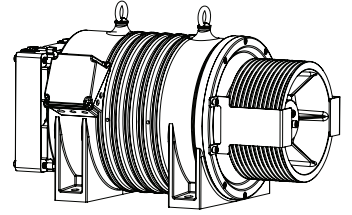


AK 2-5

1,0 M-2000 KG

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Çıkış Gücü (kW) Power Output (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Kutup-Frekans Pole-Frequency	Devir (rpm) Revolution (rpm)	Tork (Nm) Torque (Nm)	Makine Ağırlığı (Kg) Machine Weight (Kg)
AK2-5	0,63	2000	7,7	320X12X8	23,8	20P-12.53	75	981	430
AK2-5	1,00		12,2		35,1	20P-19.89	120		
AK2-5	1,60		19,6		49,1	20P-31.83	191		
AK2-5	2,00		24,5		57,8	20P-39.79	239		
AK2-5	2,50		30,6		72,3	20P-49.74	298		
AK2-5	0,63	2000	7,7	360X11X8	23,8	20P-11.14	67	1104	435
AK2-5	1,00		12,2		35,1	20P-17.68	106		
AK2-5	1,60		19,6		49,1	20P-28.29	170		
AK2-5	2,00		24,5		57,8	20P-35.37	212		
AK2-5	2,50		30,6		72,3	20P-44.21	265		
AK2-5	0,63	1600	6,2	400X6X10	21,9	20P-10.03	60	981	440
AK2-5	1,00		9,8		34,7	20P-15.92	95		
AK2-5	1,60		15,7		41,6	20P-25.46	153		
AK2-5	2,00		19,6		52,0	20P-31.83	191		
AK2-5	2,50		24,5		61,1	20P-39.79	239		

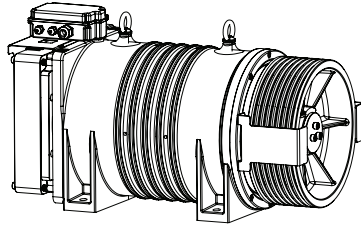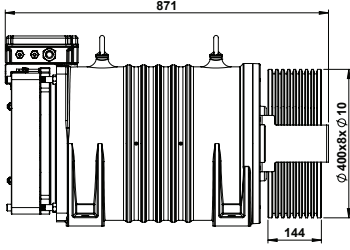

51 Metre Seyir Mesafesi

51 Meter Travel Distance

2:1 Askı

2:1 Suspension

9000 Kg Statik Yük

9000 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
AK 2-6	0,63	2500	9,6	320X14X8	29,8	20P-12.53	75	1226	545
AK 2-6	1,00		15,3		43,9	20P-19.89	120		
AK 2-6	1,60		24,5		61,4	20P-31.83	191		
AK 2-6	2,00		30,6		72,3	20P-39.79	239		
AK 2-6	2,50		38,3		90,3	20P-49.74	298		
AK 2-6	0,63	2500	9,6	360X13X8	29,8	20P-11.14	67	1380	550
AK 2-6	1,00		15,3		43,9	20P-17.68	106		
AK 2-6	1,60		24,5		61,4	20P-28.29	170		
AK 2-6	2,00		30,6		72,3	20P-35.37	212		
AK 2-6	2,50		38,3		90,3	20P-44.21	265		
AK 2-6	0,63	2000	7,7	400X8X10	23,8	20P-10.03	60	1226	545
AK 2-6	1,00		12,2		37,8	20P-15.92	96		
AK 2-6	1,60		19,6		49,1	20P-25.46	153		
AK 2-6	2,00		24,5		61,4	20P-31.83	191		
AK 2-6	2,50		30,6		72,3	20P-39.79	239		

**51 Metre Seyir Mesafesi**





51 Meter Travel Distance

2:1 Askı

2:1 Suspension





9000 Kg Statik Yük

9000 Kg Static Load

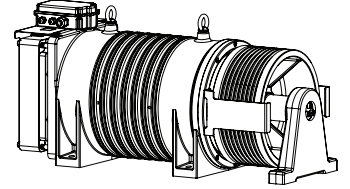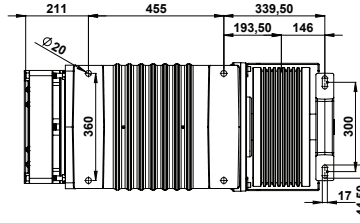

AKIS
AK 2-7
1,0 M-2500 KG
YAN YATAKLI

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Çıkış Gücü (kW) Power Output (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Kutup-Frekans Pole-Frequency	Devir (rpm) Revolution (rpm)	Tork (Nm) Torque (Nm)	Makine Ağırlığı (Kg) Machine Weight (Kg)
AK 2-7	0,63	3000	11,4	320X17X8	35,7	20P-12.53	75	1472	590
AK 2-7	1,00		18,4		52,7	20P-19.89	120		
AK 2-7	1,60		29,4		73,7	20P-31.83	191		
AK 2-7	2,00		36,7		86,7	20P-39.79	239		
AK 2-7	2,50		45,9		108,4	20P-49.74	298		
AK 2-7	0,63	2500	9,6	400X9X10	29,8	20P-10.03	60	1533	615
AK 2-7	1,00		15,3		47,3	20P-15.92	96		
AK 2-7	1,60		24,5		61,4	20P-25.46	153		
AK 2-7	2,00		30,6		76,8	20P-31.83	191		
AK 2-7	2,50		38,3		90,3	20P-39.79	239		

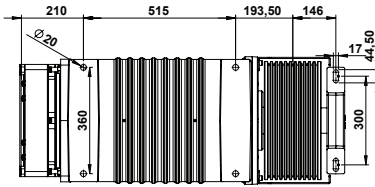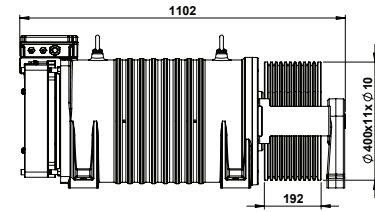

51 Metre Seyir Mesafesi

51 Meter Travel Distance

2:1 Ask1






2:1 Suspension

9000 Kg Statik Yük

9000 Kg Static Load



Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
AK 2-8	0,63	3500	13,5	320X19X8	41,7	20P-12.53	75	1717	645
AK 2-8	1,00		21,4		61,4	20P-19.89	120		
AK 2-8	1,60		34,3		86,0	20P-31.83	191		
AK 2-8	2,00		42,9		101,2	20P-39.79	239		
AK 2-8	2,50		53,6		126,5	20P-49.74	298		
AK 2-8	0,63	3000	11,6	360X15X8	35,7	20P-11.14	67	1655	650
AK 2-8	1,00		18,4		52,7	20P-17.68	106		
AK 2-8	1,60		29,4		73,7	20P-28.29	170		
AK 2-8	2,00		36,7		86,7	20P-35.37	212		
AK 2-8	2,50		45,9		108,4	20P-44.21	265		
AK 2-8	0,63	3000	11,6	400X11X10	35,7	20P-10.03	60	1839	660
AK 2-8	1,00		18,4		56,7	20P-15.92	95		
AK 2-8	1,60		29,4		73,7	20P-25.46	153		
AK 2-8	2,00		36,7		92,1	20P-31.83	191		
AK 2-8	2,50		45,9		108,4	20P-39.79	239		



MAKİS
AD-1
MAKİNE MOTOR MONTAJ

51 Metre Seyir Mesafesi

51 Meter Travel Distance

2:1 Ask1

2:1 Suspension

7000 Kg Statik Yük

7000 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
AKD 1	0,63	630	2,4	320X6X8	6,9	30P-18.80	75	309	190
AKD 1	1,00		3,9		9,6	30P-29.84	119		
AKD 1	1,60		6,2		15,4	30P-47.75	191		
AKD 1	2,00		7,7		19,3	30P-59.68	239		
AKD 1	2,50		9,6		24,1	30P-74.60	298		
AKD 1	0,63	800	3,1	320X7X8	8,7	30P-18.80	75	392	
AKD 1	1,00		4,9		12,2	30P-29.84	119		
AKD 1	1,60		7,8		19,6	30P-47.75	191		
AKD 1	2,00		9,8		24,5	30P-59.68	239		
AKD 1	2,50		12,2		30,6	30P-74.60	298		
AKD 1	0,63	1000	3,9	320X8X8	10,9	30P-18.80	75	491	
AKD 1	1,00		6,1		15,3	30P-29.84	119		
AKD 1	1,60		9,8		24,5	30P-47.75	191		
AKD 1	2,00		12,2		30,6	30P-59.68	239		
AKD 1	2,50		15,3		38,3	30P-74.60	298		
AKD 1	0,63	630	2,4	360X5X8	7,4	30P-16.71	67	348	
AKD 1	1,00		3,9		9,6	30P-26.53	106		
AKD 1	1,60		6,2		15,4	30P-42.44	170		
AKD 1	2,00		7,7		19,3	30P-53.05	212		
AKD 1	2,50		9,6		24,1	30P-66.31	265		
AKD 1	0,63	800	3,1	360X6X8	9,4	30P-16.71	67	441	
AKD 1	1,00		4,9		12,2	30P-26.53	106		
AKD 1	1,60		7,8		19,6	30P-42.44	170		
AKD 1	2,00		9,8		24,5	30P-53.05	212		
AKD 1	2,50		12,2		30,6	30P-66.31	265		
AKD 1	0,63	1000	3,9	360X7X8	11,7	30P-16.71	67	552	
AKD 1	1,00		6,1		15,3	30P-26.53	106		
AKD 1	1,60		9,8		24,5	30P-42.44	170		
AKD 1	2,00		12,2		30,6	30P-53.05	212		
AKD 1	2,50		15,3		38,3	30P-66.31	265		

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
AKD 1	0,63	630	2,4	400X4X10	7,4	30P-15.04	60	386	200
AKD 1	1,00		3,9		10,9	30P-23.87	95		
AKD 1	1,60		6,2		15,4	30P-38.20	153		
AKD 1	2,00		7,7		19,3	30P-47.75	191		
AKD 1	2,50		9,6		24,1	30P-59.68	239		
AKD 1	0,63	800	3,1	400X5X10	9,4	30P-15.04	60	491	
AKD 1	1,00		4,9		13,9	30P-23.87	95		
AKD 1	1,60		7,8		19,6	30P-38.20	153		
AKD 1	2,00		9,8		24,5	30P-47.75	191		
AKD 1	2,50		12,2		30,6	30P-59.68	239		
AKD 1	0,63	1000	3,9	400X5X10	11,7	30P-15.04	60	613	
AKD 1	1,00		6,1		17,3	30P-23.87	95		
AKD 1	1,60		9,8		24,5	30P-38.20	153		
AKD 1	2,00		12,2		30,6	30P-47.75	191		
AKD 1	2,50		15,3		38,3	30P-59.68	239		

**51 Metre Seyir Mesafesi**






51 Meter Travel Distance

2:1 Askı

2:1 Suspension





7000 Kg Statik Yük

7000 Kg Static Load




AKD 2

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Çıkış Gücü (kW) Power Output (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Kutup-Frekans Pole-Frequency	Devir (rpm) Revolution (rpm)	Tork (Nm) Torque (Nm)	Makine Ağırlığı (Kg) Machine Weight (Kg)
AKD 2	0,63	1275	4,9	320X10X8	13,9	30P-18.80	75	625	245
AKD 2	1,00		7,8		19,5	30P-29.84	119		
AKD 2	1,60		12,5		31,2	30P-47.75	191		
AKD 2	2,00		15,6		39,0	30P-59.68	239		
AKD 2	2,50		19,5		48,8	30P-74.60	298		
AKD 2	0,63	1600	6,2	320X10X8	17,5	30P-18.80	75	785	
AKD 2	1,00		9,8		24,5	30P-29.84	119		
AKD 2	1,60		15,7		39,2	30P-47.75	191		
AKD 2	2,00		19,6		49,0	30P-59.68	239		
AKD 2	2,50		24,5		61,2	30P-74.60	298		
AKD 2	0,63	1275	4,9	360X9X8	14,9	30P-16.71	67	704	250
AKD 2	1,00		7,8		19,5	30P-26.53	106		
AKD 2	1,60		12,5		31,2	30P-42.44	170		
AKD 2	2,00		15,6		39,0	30P-53.05	212		
AKD 2	2,50		19,5		48,8	30P-66.31	265		
AKD 2	0,63	1600	6,2	360X9X8	18,7	30P-16.71	67	883	
AKD 2	1,00		9,8		24,5	30P-26.53	106		
AKD 2	1,60		15,7		39,2	30P-42.44	170		
AKD 2	2,00		19,6		49,0	30P-53.05	212		
AKD 2	2,50		24,5		61,2	30P-66.31	265		
AKD 2	0,63	1275	4,9	400X6X10	14,9	30P-15.04	60	782	255
AKD 2	1,00		7,8		22,1	30P-23.87	95		
AKD 2	1,60		12,5		31,2	30P-38.20	153		
AKD 2	2,00		15,6		39,0	30P-47.75	191		
AKD 2	2,50		19,5		48,8	30P-59.68	239		


51 Metre Seyir Mesafesi

51 Meter Travel Distance

2:1 Askı

2:1 Suspension

9000 Kg Statik Yük

9000 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)	
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)	
AKD 3	0,63	2000	7,7	320X12X8	21,9	30P-18.80	75	981	295	
AKD 3	1,00		12,2		30,6	30P-29.84	119			
AKD 3	1,60		19,6		49,0	30P-47.75	191			
AKD 3	2,00		24,5		61,2	30P-59.68	239			
AKD 3	2,50		30,6		76,5	30P-74.60	298			
AKD 3	0,63	2000	7,7	360X11X8	23,4	30P-16.71	67	1104	300	
AKD 3	1,00		12,2		30,6	30P-26.53	106			
AKD 3	1,60		19,6		49,0	30P-42.44	170			
AKD 3	2,00		24,5		61,2	30P-53.05	212			
AKD 3	2,50		30,6		76,5	30P-66.31	265			
AKD 3	0,63	1600	6,2	400X6X10	18,7	30P-15.04	60	981	305	
AKD 3	1,00		9,8		27,7	30P-23.87	95			
AKD 3	1,60		15,7		39,2	30P-38.20	153			
AKD 3	2,00		19,6		49,0	30P-47.75	191			
AKD 3	2,50		24,5		61,2	30P-59.68	239			
AKD 3	0,63	2000	7,7	400X8X10	23,4	30P-15.04	60	1226		305
AKD 3	1,00		12,2		34,7	30P-23.87	95			
AKD 3	1,60		19,6		49,0	30P-38.20	153			
AKD 3	2,00		24,5		61,2	30P-47.75	191			
AKD 3	2,50		30,6		76,5	30P-59.68	239			

**33 Metre Seyir Mesafesi**





33 Meter Travel Distance

2:1 Askı

2:1 Suspension





3000 Kg Statik Yük

3000 Kg Static Load

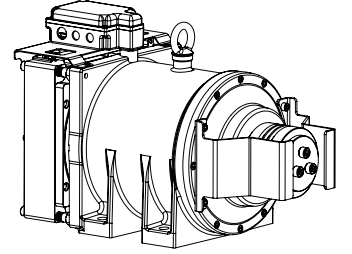

AKIS
GEARLESS S100
1,0 M-400 KG

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
S 100	0,63	320	1,2	120X4X6,5	3,1	20P-33.42	201	59	190
S 100	1,00		2,0		4,9	20P-53.05	318		
S 100	1,60		3,1		7,8	20P-84.88	509		
S 100	2,00		3,9		9,8	20P-106.10	637		
S 100	2,50		4,9		12,2	20P-132.63	796		
S 100	0,63	400	1,5	120X4X6,5	3,9	20P-33.42	201	74	
S 100	1,00		2,4		6,1	20P-53.05	318		
S 100	1,60		3,9		9,8	20P-84.88	509		
S 100	2,00		4,9		12,2	20P-106.10	637		
S 100	2,50		6,1		15,3	20P-132.63	796		
S 100	0,63	480	1,9	120X4X6,5	4,6	20P-33.42	201	88	
S 100	1,00		2,9		7,3	20P-53.05	318		
S 100	1,60		4,7		11,8	20P-84.88	509		
S 100	2,00		5,9		14,7	20P-106.10	637		
S 100	2,50		7,3		18,4	20P-132.63	796		
S 100	0,63	320	1,2	140X4X6,5	3,3	20P-28.65	172	69	
S 100	1,00		2,0		4,9	20P-45.47	273		
S 100	1,60		3,1		7,8	20P-72.76	437		
S 100	2,00		3,9		9,8	20P-90.95	546		
S 100	2,50		4,9		12,2	20P-113.68	682		
S 100	0,63	400	1,5	140X4X6,5	4,1	20P-28.65	172	86	
S 100	1,00		2,4		6,1	20P-45.47	273		
S 100	1,60		3,9		9,8	20P-72.76	437		
S 100	2,00		4,9		12,2	20P-90.95	546		
S 100	2,50		6,1		15,3	20P-113.68	682		
S 100	0,63	320	1,2	160X4X6,5	3,3	20P-25.07	150	78	
S 100	1,00		2,0		4,9	20P-39.79	239		
S 100	1,60		3,1		7,8	20P-63.66	382		
S 100	2,00		3,9		9,8	20P-79.58	477		
S 100	2,50		4,9		12,2	20P-99.47	597		
S 100	0,63	400	1,5	160X4X6,5	4,1	20P-25.07	150	98	
S 100	1,00		2,4		6,1	20P-39.79	239		
S 100	1,60		3,9		9,8	20P-63.66	382		
S 100	2,00		4,9		12,2	20P-79.58	477		
S 100	2,50		6,1		15,3	20P-99.47	597		



33 Metre Seyir Mesafesi

33 Meter Travel Distance

2:1 Askı





2:1 Suspension

4000 Kg Statik Yük

4000 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
S 200	0,63	630	2,4	120X4X6,5	6,1	20P-33.42	201	116	205
S 200	1,00		3,9		9,6	20P-53.05	318		
S 200	1,60		6,2		15,4	20P-84.88	509		
S 200	2,00		7,7		19,3	20P-106.10	637		
S 200	2,50		9,6		24,1	20P-132.63	796		
S 200	0,63	800	3,1	120X5X6,5	7,7	20P-33.42	201	147	
S 200	1,00		4,9		12,2	20P-53.05	318		
S 200	1,60		7,8		19,6	20P-84.88	509		
S 200	2,00		9,8		24,5	20P-106.10	637		
S 200	2,50		12,2		30,6	20P-132.63	796		
S 200	0,63	1000	3,9	120X6X6,5	9,6	20P-33.42	201	184	
S 200	1,00		6,1		15,3	20P-53.05	318		
S 200	1,60		9,8		24,5	20P-84.88	509		
S 200	2,00		12,2		30,6	20P-106.10	637		
S 200	2,50		15,3		38,3	20P-132.63	796		
S 200	0,63	1275	4,9	120X7X6,5	12,3	20P-33.42	201	235	
S 200	1,00		7,8		19,5	20P-53.05	318		
S 200	1,60		12,5		31,2	20P-84.88	509		
S 200	2,00		15,6		39,0	20P-106.10	637		
S 200	2,50		19,5		48,8	20P-132.63	796		
S 200	0,63	480	1,9	140X4X6,5	4,9	20P-28.65	172	103	
S 200	1,00		2,9		7,3	20P-45.47	273		
S 200	1,60		4,7		11,8	20P-72.76	437		
S 200	2,00		5,9		14,7	20P-90.95	546		
S 200	2,50		7,3		18,4	20P-113.68	682		
S 200	0,63	630	2,4	140X5X6,5	6,5	20P-28.65	172	135	
S 200	1,00		3,9		9,6	20P-45.47	273		
S 200	1,60		6,2		15,4	20P-72.76	437		
S 200	2,00		7,7		19,3	20P-90.95	546		
S 200	2,50		9,6		24,1	20P-113.68	682		
S 200	0,63	800	3,1	140X6X6,5	8,2	20P-28.65	172	172	
S 200	1,00		4,9		12,2	20P-45.47	273		
S 200	1,60		7,8		19,6	20P-72.76	437		
S 200	2,00		9,8		24,5	20P-90.95	546		
S 200	2,50		12,2		30,6	20P-113.68	682		

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
S 200	0,63	1000	3,9	140X7X6,5	10,2	20P-28.65	172	215	205
S 200	1,00		6,1		15,3	20P-45.47	273		
S 200	1,60		9,8		24,5	20P-72.76	437		
S 200	2,00		12,2		30,6	20P-90.95	546		
S 200	2,50		15,3		38,3	20P-113.68	682		
S 200	0,63	320	1,2	210X5X6,5	3,7	20P-19.10	115	103	
S 200	1,00		2,0		5,2	20P-30.32	182		
S 200	1,60		3,1		7,8	20P-48.50	291		
S 200	2,00		3,9		9,8	20P-60.63	364		
S 200	2,50		4,9		12,2	20P-75.79	455		
S 200	0,63	400	1,5	210X5X6,5	4,7	20P-19.10	115	129	
S 200	1,00		2,4		6,5	20P-30.32	182		
S 200	1,60		3,9		9,8	20P-48.50	291		
S 200	2,00		4,9		12,2	20P-60.63	364		
S 200	2,50		6,1		15,3	20P-75.79	455		
S 200	0,63	480	1,9	210X6X6,5	5,6	20P-19.10	115	155	
S 200	1,00		2,9		7,8	20P-30.32	182		
S 200	1,60		4,7		11,8	20P-48.50	291		
S 200	2,00		5,9		14,7	20P-60.63	364		
S 200	2,50		7,3		18,4	20P-75.79	455		
S 200	0,63	630	2,4	210X7X6,5	7,4	20P-19.10	115	203	
S 200	1,00		3,9		10,2	20P-30.32	182		
S 200	1,60		6,2		15,4	20P-48.50	291		
S 200	2,00		7,7		19,3	20P-60.63	364		
S 200	2,50		9,6		24,1	20P-75.79	455		
S 200	0,63	320	1,2	240X4X6,5	3,7	20P-16.71	100	118	
S 200	1,00		2,0		5,2	20P-26.53	159		
S 200	1,60		3,1		7,8	20P-42.44	255		
S 200	2,00		3,9		9,8	20P-53.05	318		
S 200	2,50		4,9		12,2	20P-63.61	398		
S 200	0,63	400	1,5	240X4X6,5	4,7	20P-16.71	100	147	
S 200	1,00		2,4		6,5	20P-26.53	159		
S 200	1,60		3,9		9,8	20P-42.44	255		
S 200	2,00		4,9		12,2	20P-53.05	318		
S 200	2,50		6,1		15,3	20P-63.61	398		
S 200	0,63	480	1,9	240X5X6,5	5,6	20P-16.71	100	177	
S 200	1,00		2,9		7,8	20P-26.53	159		
S 200	1,60		4,7		11,8	20P-42.44	255		
S 200	2,00		5,9		14,7	20P-53.05	318		
S 200	2,50		7,3		18,4	20P-66.33	398		
S 200	0,63	630	2,4	240X6X6,5	7,4	20P-16.71	100	232	
S 200	1,00		3,9		10,2	20P-26.53	159		
S 200	1,60		6,2		15,4	20P-42.44	255		
S 200	2,00		7,7		19,3	20P-53.05	318		
S 200	2,50		9,6		24,1	20P-66.33	398		
S 200	0,63	320	1,2	320X4X8	4,4	20P-12.53	75	157	
S 200	1,00		2,0		5,9	20P-19.89	119		
S 200	1,60		3,1		8,3	20P-31.83	191		
S 200	2,00		3,9		9,8	20P-39.79	239		
S 200	2,50		4,9		12,2	20P-49.74	298		
S 200	0,63	400	1,5	320X4X8	5,5	20P-12.53	75	196	
S 200	1,00		2,4		7,4	20P-19.89	119		
S 200	1,60		3,9		10,4	20P-31.83	191		
S 200	2,00		4,9		12,2	20P-39.79	239		
S 200	2,50		6,1		15,3	20P-49.74	298		
S 200	0,63	480	1,9	320X4X8	6,6	20P-12.53	75	235	
S 200	1,00		2,9		8,9	20P-19.89	119		
S 200	1,60		4,7		12,5	20P-31.83	191		
S 200	2,00		5,9		14,7	20P-39.79	239		
S 200	2,50		7,3		18,4	20P-49.74	298		

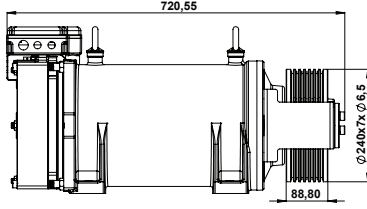
33 Metre Seyir Mesafesi

33 Meter Travel Distance

2:1 Askı

2:1 Suspension

5000 Kg Statik Yük

5000 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
S 300	0,63	800	3,1	210X8X6,5	9,4	20P-19.10	115	258	220
S 300	1,00		4,9		13,0	20P-30.32	182		
S 300	1,60		7,8		19,6	20P-48.50	291		
S 300	2,00		9,8		24,5	20P-60.63	364		
S 300	2,50		12,2		30,6	20P-75.79	455		
S 300	0,63	1000	3,9	210X9X6,5	11,7	20P-19.10	115	322	
S 300	1,00		6,1		16,3	20P-30.32	182		
S 300	1,60		9,8		24,5	20P-48.50	291		
S 300	2,00		12,2		30,6	20P-60.63	364		
S 300	2,50		15,3		38,3	20P-75.79	455		
S 300	0,63	800	3,1	240X7X6,5	9,4	20P-16.71	100	294	
S 300	1,00		4,9		13,0	20P-26.53	159		
S 300	1,60		7,8		19,6	20P-42.44	255		
S 300	2,00		9,8		24,5	20P-53.05	318		
S 300	2,50		12,2		30,6	20P-66.33	398		
S 300	0,63	630	2,4	320X5X8	8,6	20P-12.53	75	309	
S 300	1,00		3,9		11,7	20P-19.89	119		
S 300	1,60		6,2		16,4	20P-31.83	191		
S 300	2,00		7,7		19,3	20P-39.79	239		
S 300	2,50		9,6		24,1	20P-49.74	298		

**33 Metre Seyir Mesafesi**





33 Meter Travel Distance

2:1 Askı

2:1 Suspension





7000 Kg Statik Yük

7000 Kg Static Load

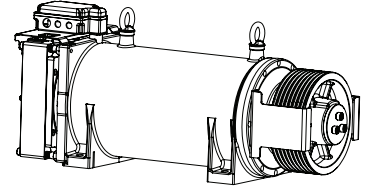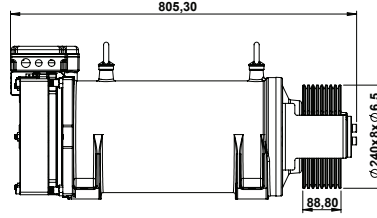


GEARLESS
S 400 MAKİNE MONTAJI

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
S 400	0,63	1275	4,9	210X11X6,5	14,9	20P-19.10	115	410	235
S 400	1,00		7,8		20,7	20P-30.32	182		
S 400	1,60		12,5		31,2	20P-48.50	291		
S 400	2,00		15,6		39,0	20P-60.63	364		
S 400	2,50		19,5		48,8	20P-75.79	455		
S 400	0,63	1000	3,9	240X8X6,5	11,7	20P-16.71	100	368	
S 400	1,00		6,1		16,3	20P-26.53	159		
S 400	1,60		9,8		24,5	20P-42.44	255		
S 400	2,00		12,2		30,6	20P-53.05	318		
S 400	2,50		15,3		38,3	20P-66.33	398		
S 400	0,63	1275	4,9	240X9X6,5	14,9	20P-16.71	100	469	
S 400	1,00		7,8		20,7	20P-26.53	159		
S 400	1,60		12,5		31,2	20P-42.44	255		
S 400	2,00		15,6		39,0	20P-53.05	318		
S 400	2,50		19,5		48,8	20P-66.33	398		
S 400	0,63	800	3,1	320X5X8	10,9	20P-12.53	75	392	
S 400	1,00		4,9		14,9	20P-19.89	119		
S 400	1,60		7,8		20,8	20P-31.83	191		
S 400	2,00		9,8		24,5	20P-39.79	239		
S 400	2,50		12,2		30,6	20P-49.74	298		



10 Metre Seyir Mesafesi

10 Meter Travel Distance

2:1 Askı

2:1 Suspension

5000 Kg Statik Yük

5000 Kg Static Load

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Çıkış Gücü (kW) Power Output (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Kutup-Frekans Pole-Frequency	Devir (rpm) Revolution (rpm)	Tork (Nm) Torque (Nm)	Makine Ağırlığı (Kg) Machine Weight (Kg)
HS 100	0,15	320	0,3	120*3*6,5	3,5	20P-7.96	48	68	190
HS 100	0,30		0,6		3,8	20P-15.92	95	74	
HS 100	0,40		0,8		3,9	20P-21.22	127	59	
HS 100	0,15	320	0,3	140*3*6,5	3,7	20P-6.82	41	80	
HS 100	0,30		0,6		4,0	20P-13.64	82	69	
HS 100	0,40		0,8		4,1	20P-18.19	109	69	
HS 100	0,15	320	0,3	160*3*6,5	3,8	20P-5.97	36	91	
HS 100	0,30		0,6		4,3	20P-11.94	72	78	
HS 100	0,40		0,8		4,3	20P-15.92	95	78	
HS 100	0,15	400	0,4	120*3*6,5	4,4	20P-7.96	48	85	
HS 100	0,30		0,7		4,7	20P-15.92	95	74	
HS 100	0,40		1,0		4,9	20P-21.22	127	74	
HS 100	0,15	400	0,4	140*3*6,5	4,6	20P-6.82	41	100	
HS 100	0,30		0,7		5,0	20P-13.64	82	86	
HS 100	0,40		1,0		5,1	20P-18.19	109	86	
HS 100	0,15	400	0,4	160*3*6,5	4,8	20P-5.97	36	114	
HS 100	0,30		0,7		5,3	20P-11.94	72	98	
HS 100	0,40		1,0		5,4	20P-15.92	95	98	
HS 100	0,15	480	0,5	120*4*6,5	5,2	20P-7.96	48	102	
HS 100	0,30		0,9		5,7	20P-15.92	95	88	
HS 100	0,40		1,2		5,9	20P-21.22	127	88	
HS 100	0,15	480	0,5	140*4*6,5	5,5	20P-6.82	41	119	
HS 100	0,30		0,9		6,0	20P-13.64	82	103	
HS 100	0,40		1,2		6,2	20P-18.19	109	103	



10 Metre Seyir Mesafesi





10 Meter Travel Distance

2:1 Askı

2:1 Suspension

5000 Kg Statik Yük

5000 Kg Static Load

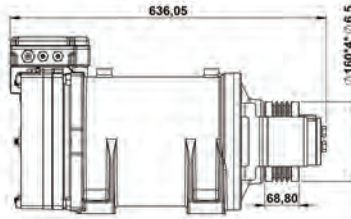

AKIS
HS 200

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Çıkış Gücü (kW) Power Output (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Kutup-Frekans Pole-Frequency	Devir (rpm) Revolution (rpm)	Tork (Nm) Torque (Nm)	Makine Ağırlığı (Kg) Machine Weight (Kg)
HS 200	0,15	480	0,5	160*4*6,5	5,8	20P-5.97	36	137	205
HS 200	0,30		0,9		6,4	20P-11.94	72	118	
HS 200	0,40		1,2		6,5	20P-15.92	95	118	
HS 200	0,15	630	0,7	120*5*6,5	6,9	20P-7.96	48	134	
HS 200	0,30		1,2		7,5	20P-15.92	95	116	
HS 200	0,40		1,5		7,7	20P-21.22	127	116	
HS 200	0,15	630	0,7	140*5*6,5	7,2	20P-6.82	41	157	
HS 200	0,30		1,2		7,9	20P-13.64	82	135	
HS 200	0,40		1,5		8,1	20P-18.19	109	135	
HS 200	0,15	630	0,7	160*5*6,5	7,6	20P-5.97	36	179	
HS 200	0,30		1,2		8,4	20P-11.94	72	155	
HS 200	0,40		1,5		8,5	20P-15.92	95	155	





BELT GEARLESS MACHINES





Speed: 0,30-2,50 m/s

Capacity: 250-2500 kg

Travel Distance: 33 meter

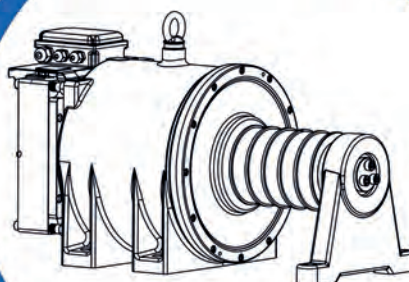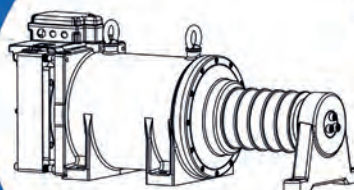

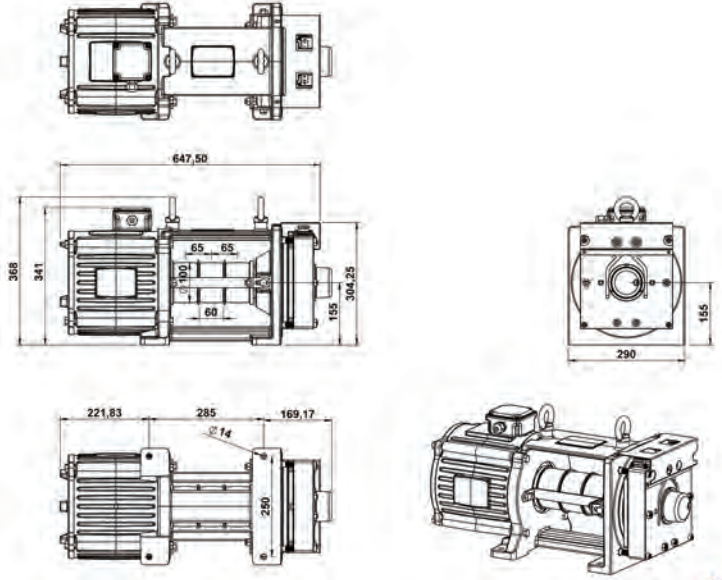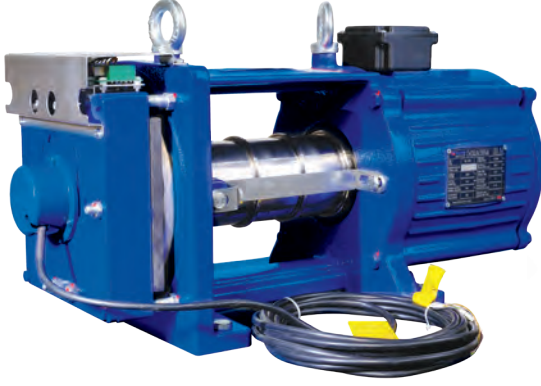

33 Metre Seyir Mesafesi

33 Meter Travel Distance

2:1 Askı


2:1 Suspension

3000 Kg Statik Yük

3000 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
KS100	0,30	250	0,5	100X2X30-65 100X2X30-260	2,1	20P - 19.10	115	45	130
KS100	0,40		0,7		2,4	20P - 25.46	153		
KS100	0,50		0,9		3,0	20P - 31.83	191		
KS100	1,00		1,8		3,8	20P - 63.66	382		
KS100	1,60		2,9		6,1	20P - 101.86	611		
KS100	1,75		3,2		6,7	20P - 111.41	668		
KS100	2,00		3,6		7,6	20P - 127.32	764		
KS100	2,50		4,5		9,6	20P - 159.15	955		
KS100	0,30	320	0,7	100X2X30-65 100X2X30-260	2,7	20P - 19.10	115	60	
KS100	0,40		1,0		3,2	20P - 25.46	153		
KS100	0,50		1,2		4,0	20P - 31.83	191		
KS100	1,00		2,4		4,9	20P - 63.66	382		
KS100	1,60		3,8		7,8	20P - 101.86	611		
KS100	1,75		4,2		8,6	20P - 111.41	668		
KS100	2,00		4,8		9,8	20P - 127.32	764		
KS100	2,50		6,0		12,2	20P - 159.15	955		
KS100	0,30	400	0,9	100X2X30-65 100X2X30-260	3,4	20P - 19.10	115	75	
KS100	0,40		1,2		4,0	20P - 25.46	153		
KS100	0,50		1,5		5,0	20P - 31.83	191		
KS100	1,00		3,0		6,1	20P - 63.66	382		
KS100	1,60		4,8		9,8	20P - 101.86	611		
KS100	1,75		5,3		10,7	20P - 111.41	668		
KS100	2,00		6,0		12,2	20P - 127.32	764		
KS100	2,50		7,5		15,3	20P - 159.15	955		
KS100	0,30	450	1,0	100X2X30-65 100X2X30-260	3,7	20P - 19.10	115	85	
KS100	0,40		1,4		4,3	20P - 25.46	153		
KS100	0,50		1,7		5,3	20P - 31.83	191		
KS100	1,00		3,4		6,9	20P - 63.66	382		
KS100	1,60		5,4		11,0	20P - 101.86	611		
KS100	1,75		6,0		12,0	20P - 111.41	668		
KS100	2,00		6,8		13,8	20P - 127.32	764		
KS100	2,50		8,5		17,2	20P - 159.15	955		
KS100	0,30	630	1,3	100X2X30-65 100X2X30-260 100X3X30-65	5,0	20P - 19.10	115	110	
KS100	0,40		1,8		5,9	20P - 25.46	153		
KS100	0,50		2,2		7,4	20P - 31.83	191		
KS100	1,00		4,4		9,6	20P - 63.66	382		
KS100	1,60		7,0		15,4	20P - 101.86	611		
KS100	1,75		7,7		16,9	20P - 111.41	668		
KS100	2,00		8,8		19,3	20P - 127.32	764		
KS100	2,50		11,0		24,1	20P - 159.15	955		

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
KS100	0,30	250	0,5	120X2X30-65 120X2X30-260	2,2	20P - 15.92	95	55	130
KS100	0,40		0,7		2,4	20P - 21.22	127		
KS100	0,50		0,9		2,8	20P - 26.53	159		
KS100	1,00		1,8		3,8	20P - 53.05	318		
KS100	1,60		2,9		6,1	20P - 84.88	509		
KS100	1,75		3,2		6,7	20P - 92.84	557		
KS100	2,00		3,6		7,6	20P - 106.10	637		
KS100	2,50		4,6		9,6	20P - 132.63	796		
KS100	0,30	320	0,7	120X2X30-65 120X2X30-260	2,9	20P - 15.92	95	70	
KS100	0,40		0,9		3,1	20P - 21.22	127		
KS100	0,50		1,2		3,6	20P - 26.53	159		
KS100	1,00		2,3		4,9	20P - 53.05	318		
KS100	1,60		3,7		7,8	20P - 84.88	509		
KS100	1,75		4,1		8,6	20P - 92.84	557		
KS100	2,00		4,7		9,8	20P - 106.10	637		
KS100	2,50		5,8		12,2	20P - 132.63	796		
KS100	0,30	400	0,9	120X2X30-65 120X2X30-260	3,6	20P - 15.92	95	85	
KS100	0,40		1,1		3,8	20P - 21.22	127		
KS100	0,50		1,4		4,5	20P - 26.53	159		
KS100	1,00		2,8		6,1	20P - 53.05	318		
KS100	1,60		4,5		9,8	20P - 84.88	509		
KS100	1,75		5,0		10,7	20P - 92.84	557		
KS100	2,00		5,7		12,2	20P - 106.10	637		
KS100	2,50		7,1		15,3	20P - 132.63	796		
KS100	0,30	450	1,0	120X2X30-65 120X2X30-260	4,0	20P - 15.92	95	95	
KS100	0,40		1,3		4,3	20P - 21.22	127		
KS100	0,50		1,6		5,0	20P - 26.53	159		
KS100	1,00		3,2		6,9	20P - 53.05	318		
KS100	1,60		5,1		11,0	20P - 84.88	509		
KS100	1,75		5,5		12,0	20P - 92.84	557		
KS100	2,00		6,3		13,8	20P - 106.10	637		
KS100	2,50		7,9		17,2	20P - 132.63	796		
KS100	0,30	250	0,6	130X2X30-65 130X2X30-260	2,5	20P - 14.69	88	65	
KS100	0,40		0,8		2,8	20P - 19.59	118		
KS100	0,50		1,0		3,3	20P - 24.49	147		
KS100	1,00		2,0		3,8	20P - 48.97	294		
KS100	1,60		3,2		6,1	20P - 78.35	470		
KS100	1,75		3,5		6,7	20P - 85.70	514		
KS100	2,00		4,0		7,6	20P - 97.94	588		
KS100	2,50		5,0		9,6	20P - 122.43	735		
KS100	0,30	320	0,7	130X2X30-65 130X2X30-260	3,3	20P - 14.69	88	80	
KS100	0,40		1,0		3,8	20P - 19.59	118		
KS100	0,50		1,2		4,4	20P - 24.49	147		
KS100	1,00		2,5		4,9	20P - 48.97	294		
KS100	1,60		3,9		7,8	20P - 78.35	470		
KS100	1,75		4,3		8,6	20P - 85.70	514		
KS100	2,00		4,9		9,8	20P - 97.94	588		
KS100	2,50		6,2		12,2	20P - 122.43	735		
KS100	0,30	400	0,9	130X2X30-65 130X2X30-260	3,9	20P - 14.69	88	100	
KS100	0,40		1,2		4,5	20P - 19.59	118		
KS100	0,50		1,5		5,2	20P - 24.49	147		
KS100	1,00		3,1		6,1	20P - 48.97	294		
KS100	1,60		4,9		9,8	20P - 78.35	470		
KS100	1,75		5,4		10,7	20P - 85.70	514		
KS100	2,00		6,2		12,2	20P - 97.94	588		
KS100	2,50		7,7		15,3	20P - 122.43	735		
KS100	0,30	450	1,0	130X2X30-65 130X2X30-260	4,5	20P - 14.69	88	110	
KS100	0,40		1,4		5,2	20P - 19.59	118		
KS100	0,50		1,7		6,0	20P - 24.49	147		
KS100	1,00		3,4		6,9	20P - 48.97	294		
KS100	1,60		5,4		11,0	20P - 78.35	470		
KS100	1,75		5,9		12,0	20P - 85.70	514		
KS100	2,00		6,8		13,8	20P - 97.94	588		
KS100	2,50		8,5		17,2	20P - 122.43	735		

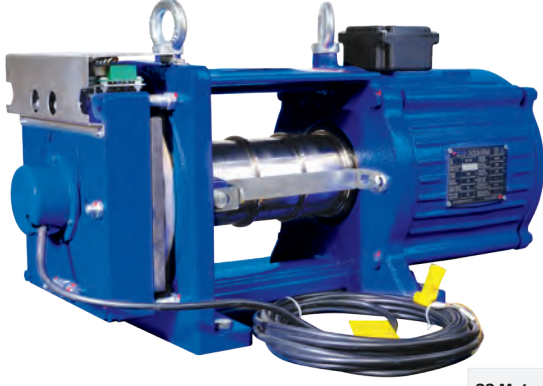

33 Metre Seyir Mesafesi


33 Meter Travel Distance

2:1 Askı

2:1 Suspension


4000 Kg Statik Yük

4000 Kg Static Load

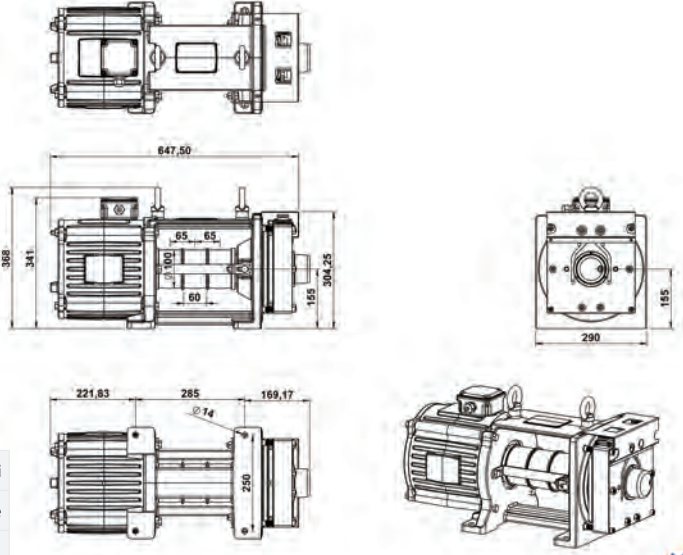

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)
KS200	0,30	800	1,6	100X3X30-65 100X4X30-65	6,0	20P - 19.10	115	130
KS200	0,40		2,1		6,9	20P - 25.46	153	
KS200	0,50		2,6		8,7	20P - 31.83	191	
KS200	1,00		5,2		12,2	20P - 63.66	382	
KS200	1,60		8,3		19,6	20P - 101.86	611	
KS200	1,75		9,1		21,4	20P - 111.41	668	
KS200	2,00		10,4		24,5	20P - 127.32	764	
KS200	2,50		13,0		30,6	20P - 159.15	955	
KS200	0,30	1000	1,9	100X3X30-65 100X4X30-65	7,3	20P - 19.10	115	160
KS200	0,40		2,6		8,6	20P - 25.46	153	
KS200	0,50		3,2		10,7	20P - 31.83	191	
KS200	1,00		6,4		15,3	20P - 63.66	382	
KS200	1,60		10,2		24,5	20P - 101.86	611	
KS200	1,75		11,2		26,8	20P - 111.41	668	
KS200	2,00		12,8		30,6	20P - 127.32	764	
KS200	2,50		16,0		38,2	20P - 159.15	955	
KS200	0,30	1150	2,3	100X4X30-65 100X5X30-65	8,7	20P - 19.10	115	190
KS200	0,40		3,0		10,2	20P - 25.46	153	
KS200	0,50		3,8		12,7	20P - 31.83	191	
KS200	1,00		7,6		17,6	20P - 63.66	382	
KS200	1,60		12,2		28,1	20P - 101.86	611	
KS200	1,75		13,3		30,8	20P - 111.41	668	
KS200	2,00		15,2		35,2	20P - 127.32	764	
KS200	2,50		19,0		43,9	20P - 159.15	955	
KS200	0,30	1250	2,5	100X4X30-65 100X5X30-65	9,4	20P - 19.10	115	205
KS200	0,40		3,3		11,0	20P - 25.46	153	
KS200	0,50		4,1		13,7	20P - 31.83	191	
KS200	1,00		8,2		19,1	20P - 63.66	382	
KS200	1,60		13,1		30,6	20P - 101.86	611	
KS200	1,75		14,4		33,4	20P - 111.41	668	
KS200	2,00		16,4		38,2	20P - 127.32	764	
KS200	2,50		20,5		47,8	20P - 159.15	955	
KS200	0,30	1350	2,6	100X4X30-65 100X5X30-65	10,1	20P - 19.10	115	220
KS200	0,40		3,5		11,8	20P - 25.46	153	
KS200	0,50		4,4		14,7	20P - 31.83	191	
KS200	1,00		8,8		20,6	20P - 63.66	382	
KS200	1,60		14,1		33,0	20P - 101.86	611	
KS200	1,75		15,4		36,1	20P - 111.41	668	
KS200	2,00		17,6		41,3	20P - 127.32	764	
KS200	2,50		22,0		51,6	20P - 159.15	955	

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)
KS200	0,30	630	1,3	120X2X30-65 120X2X30-260 120X3X30-65	5,6	20P - 15.92	95	125
KS200	0,40		1,7		5,9	20P - 21.22	127	
KS200	0,50		2,1		7,0	20P - 26.53	159	
KS200	1,00		4,2		9,6	20P - 53.05	318	
KS200	1,60		6,7		15,4	20P - 84.88	509	
KS200	1,75		7,3		16,9	20P - 92.84	557	
KS200	2,00		8,3		19,3	20P - 106.10	637	
KS200	2,50		10,4		24,1	20P - 132.63	796	
KS200	0,30	800	1,6	120X3X30-65 120X4X30-65	6,9	20P - 15.92	95	155
KS200	0,40		2,1		7,4	20P - 21.22	127	
KS200	0,50		2,6		8,6	20P - 26.53	159	
KS200	1,00		5,2		12,2	20P - 53.05	318	
KS200	1,60		8,3		19,6	20P - 84.88	509	
KS200	1,75		9,0		21,4	20P - 92.84	557	
KS200	2,00		10,3		24,5	20P - 106.10	637	
KS200	2,50		12,9		30,6	20P - 132.63	796	
KS200	0,30	1000	2,0	120X3X30-65 120X4X30-65	8,7	20P - 15.92	95	195
KS200	0,40		2,6		9,3	20P - 21.22	127	
KS200	0,50		3,3		10,9	20P - 26.53	159	
KS200	1,00		6,5		15,3	20P - 53.05	318	
KS200	1,60		10,4		24,5	20P - 84.88	509	
KS200	1,75		11,4		26,8	20P - 92.84	557	
KS200	2,00		13,0		30,6	20P - 106.10	637	
KS200	2,50		16,3		38,2	20P - 132.63	796	
KS200	0,30	1150	2,2	120X4X30-65 120X5X30-65	10,0	20P - 15.92	95	225
KS200	0,40		3,0		10,7	20P - 21.22	127	
KS200	0,50		3,7		12,5	20P - 26.53	159	
KS200	1,00		7,5		17,6	20P - 53.05	318	
KS200	1,60		12,0		28,1	20P - 84.88	509	
KS200	1,75		13,1		30,8	20P - 92.84	557	
KS200	2,00		15,0		35,2	20P - 106.10	637	
KS200	2,50		18,7		43,9	20P - 132.63	796	
KS200	0,30	1250	2,5	120X4X30-65 120X5X30-65	10,9	20P - 15.92	95	245
KS200	0,40		3,3		11,6	20P - 21.22	127	
KS200	0,50		4,1		13,6	20P - 26.53	159	
KS200	1,00		8,2		19,1	20P - 53.05	318	
KS200	1,60		13,1		30,6	20P - 84.88	509	
KS200	1,75		14,3		33,4	20P - 92.84	557	
KS200	2,00		16,3		38,2	20P - 106.10	637	
KS200	2,50		20,4		47,8	20P - 132.63	796	
KS200	0,30	630	1,2	130X2X30-65 130X2X30-260 130X3X30-65	5,6	20P - 14.69	88	135
KS200	0,40		1,7		6,3	20P - 19.59	118	
KS200	0,50		2,1		7,4	20P - 24.49	147	
KS200	1,00		4,2		9,6	20P - 48.97	294	
KS200	1,60		6,6		15,4	20P - 78.35	470	
KS200	1,75		7,3		16,9	20P - 85.70	514	
KS200	2,00		8,3		19,3	20P - 97.94	588	
KS200	2,50		10,4		24,1	20P - 122.43	735	
KS200	0,30	800	1,6	130X3X30-65 130X4X30-65	7,0	20P - 14.69	88	170
KS200	0,40		2,1		8,0	20P - 19.59	118	
KS200	0,50		2,6		9,3	20P - 24.49	147	
KS200	1,00		5,2		12,2	20P - 48.97	294	
KS200	1,60		8,4		19,6	20P - 78.35	470	
KS200	1,75		9,2		21,4	20P - 85.70	514	
KS200	2,00		10,5		24,5	20P - 97.94	588	
KS200	2,50		13,1		30,6	20P - 122.43	735	
KS200	0,30	1000	1,9	130X3X30-65 130X4X30-65	8,6	20P - 14.69	88	210
KS200	0,40		2,6		9,9	20P - 19.59	118	
KS200	0,50		3,2		11,5	20P - 24.49	147	
KS200	1,00		6,5		15,3	20P - 48.97	294	
KS200	1,60		10,3		24,5	20P - 78.35	470	
KS200	1,75		11,3		26,8	20P - 85.70	514	
KS200	2,00		12,9		30,6	20P - 97.94	588	
KS200	2,50		16,2		38,2	20P - 122.43	735	
KS200	0,30	1150	2,3	130X4X30-65 130X5X30-65	10,1	20P - 14.69	88	245
KS200	0,40		3,0		11,5	20P - 19.59	118	
KS200	0,50		3,8		13,4	20P - 24.49	147	
KS200	1,00		7,5		17,6	20P - 48.97	294	
KS200	1,60		12,1		28,1	20P - 78.35	470	
KS200	1,75		13,2		30,8	20P - 85.70	514	
KS200	2,00		15,1		35,2	20P - 97.94	588	
KS200	2,50		18,8		43,9	20P - 122.43	735	

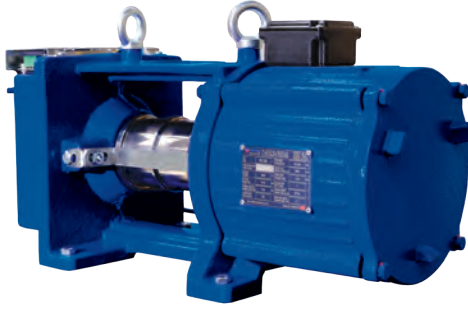**33 Metre Seyir Mesafesi**





33 Meter Travel Distance

2:1 Askı



2:1 Suspension

5000 Kg Statik Yük

5000 Kg Static Load



Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)
KS300	0,30	1600	3,1	100X5X30-65	11,9	20P - 19.10	115	260
KS300	0,40		4,2		13,9	20P - 25.46	153	
KS300	0,50		5,2		17,4	20P - 31.83	191	
KS300	1,00		10,4		24,5	20P - 63.66	382	
KS300	1,60		16,6		39,1	20P - 101.86	611	
KS300	1,75		18,2		42,8	20P - 111.41	668	
KS300	2,00		20,8		48,9	20P - 127.32	764	
KS300	2,50		26,0		61,1	20P - 159.15	955	
KS300	0,30	2000	3,9	100X5X30-65	14,9	20P - 19.10	115	325
KS300	0,40		5,2		17,4	20P - 25.46	153	
KS300	0,50		6,5		21,7	20P - 31.83	191	
KS300	1,00		13,0		30,6	20P - 63.66	382	
KS300	1,60		20,8		48,9	20P - 101.86	611	
KS300	1,75		22,8		53,5	20P - 111.41	668	
KS300	2,00		26,0		61,1	20P - 127.32	764	
KS300	2,50		32,5		76,4	20P - 159.15	955	
KS300	0,30	1350	2,7	120X4X30-65 120X5X30-65	11,8	20P - 15.92	95	265
KS300	0,40		3,5		12,6	20P - 21.22	127	
KS300	0,50		4,4		14,8	20P - 26.53	159	
KS300	1,00		8,8		20,6	20P - 53.05	318	
KS300	1,60		14,1		33,0	20P - 84.88	509	
KS300	1,75		15,5		36,1	20P - 92.84	557	
KS300	2,00		17,7		41,3	20P - 106.10	637	
KS300	2,50		22,1		51,6	20P - 132.63	796	
KS300	0,30	1600	3,1	120X5X30-65	13,8	20P - 15.92	95	310
KS300	0,40		4,1		14,7	20P - 21.22	127	
KS300	0,50		5,2		17,3	20P - 26.53	159	
KS300	1,00		10,3		24,5	20P - 53.05	318	
KS300	1,60		16,5		39,1	20P - 84.88	509	
KS300	1,75		18,1		42,8	20P - 92.84	557	
KS300	2,00		20,7		48,9	20P - 106.10	637	
KS300	2,50		25,8		61,1	20P - 132.63	796	
KS300	0,30	1250	2,4	130X4X30-65 130X5X30-65	10,9	20P - 14.69	88	265
KS300	0,40		3,3		12,5	20P - 19.59	118	
KS300	0,50		4,1		14,5	20P - 24.49	147	
KS300	1,00		8,2		19,1	20P - 48.97	294	
KS300	1,60		13,0		30,6	20P - 78.35	470	
KS300	1,75		14,3		33,4	20P - 85.70	514	
KS300	2,00		16,3		38,2	20P - 97.94	588	
KS300	2,50		20,4		47,8	20P - 122.43	735	
KS300	0,30	1350	2,6	130X4X30-65 130X5X30-65	11,7	20P - 14.69	88	285
KS300	0,40		3,5		13,4	20P - 19.59	118	
KS300	0,50		4,4		15,6	20P - 24.49	147	
KS300	1,00		8,8		20,6	20P - 48.97	294	
KS300	1,60		14,0		33,0	20P - 78.35	470	
KS300	1,75		15,4		36,1	20P - 85.70	514	
KS300	2,00		17,6		41,3	20P - 97.94	588	
KS300	2,50		21,9		51,6	20P - 122.43	735	
KS300	0,30	1600	3,1	130X5X30-65	14,0	20P - 14.69	88	340
KS300	0,40		4,2		16,0	20P - 19.59	118	
KS300	0,50		5,2		18,6	20P - 24.49	147	
KS300	1,00		10,5		24,5	20P - 48.97	294	
KS300	1,60		16,7		39,1	20P - 78.35	470	
KS300	1,75		18,3		42,8	20P - 85.70	514	
KS300	2,00		20,9		48,9	20P - 97.94	588	
KS300	2,50		26,2		61,1	20P - 122.43	735	

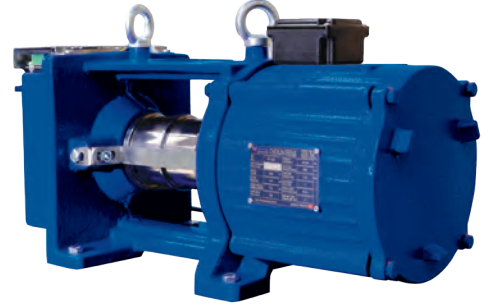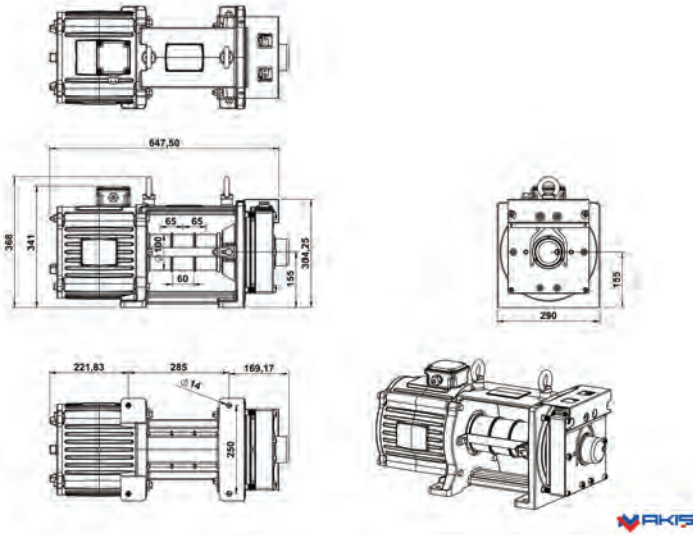

33 Metre Seyir Mesafesi

33 Meter Travel Distance

2:1 Askı

2:1 Suspension

7000 Kg Statik Yük

7000 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)
KS400	0,30	2500	4,9	100X6X30-65 100X6X30-260	18,6	20P - 19.10	115	405
KS400	0,40		6,5		21,7	20P - 25.46	153	
KS400	0,50		8,1		27,1	20P - 31.83	191	
KS400	1,00		16,2		38,2	20P - 63.66	382	
KS400	1,60		25,9		61,1	20P - 101.86	611	
KS400	1,75		28,4		66,9	20P - 111.41	668	
KS400	2,00		32,4		76,4	20P - 127.32	764	
KS400	2,50		40,5		95,5	20P - 159.15	955	
KS400	0,30	2000	3,9	120X5X30-65	17,4	20P - 15.92	95	390
KS400	0,40		5,2		18,5	20P - 21.22	127	
KS400	0,50		6,5		21,7	20P - 26.53	159	
KS400	1,00		13,0		30,6	20P - 53.05	318	
KS400	1,60		20,8		48,9	20P - 84.88	509	
KS400	1,75		22,8		53,5	20P - 92.84	557	
KS400	2,00		26,0		61,1	20P - 106.10	637	
KS400	2,50		32,5		76,4	20P - 132.63	796	
KS400	0,30	2500	4,9	120X6X30-65 120X6X30-260	21,8	20P - 15.92	95	490
KS400	0,40		6,5		23,3	20P - 21.22	127	
KS400	0,50		8,2		27,3	20P - 26.53	159	
KS400	1,00		16,3		38,2	20P - 53.05	318	
KS400	1,60		26,1		61,1	20P - 84.88	509	
KS400	1,75		28,6		66,9	20P - 92.84	557	
KS400	2,00		32,7		76,4	20P - 106.10	637	
KS400	2,50		40,8		95,5	20P - 132.63	796	
KS400	0,30	2000	3,9	130X5X30-65	17,5	20P - 14.69	88	425
KS400	0,40		5,2		20,0	20P - 19.59	118	
KS400	0,50		6,5		23,3	20P - 24.49	147	
KS400	1,00		13,1		30,6	20P - 48.97	294	
KS400	1,60		20,9		48,9	20P - 78.35	470	
KS400	1,75		22,9		53,5	20P - 85.70	514	
KS400	2,00		26,2		61,1	20P - 97.94	588	
KS400	2,50		32,7		76,4	20P - 122.43	735	



33 Metre Seyir Mesafesi





33 Meter Travel Distance

2:1 Askı

2:1 Suspension





7000 Kg Statik Yük

7000 Kg Static Load



volpi
MRL 1-KAYIŞLI
1,0 M-480 KG

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
VOLPI MRL K1	0,63	320	1,2	120X3**	3,1	20P - 33.42	201	59	155
VOLPI MRL K1	1,00		2,0		4,9	20P - 53.05	318		
VOLPI MRL K1	1,60		3,1		7,8	20P - 84.88	509		
VOLPI MRL K1	0,63	400	1,5	120X3**	3,9	20P - 33.42	201	74	
VOLPI MRL K1	1,00		2,4		6,1	20P - 53.05	318		
VOLPI MRL K1	1,60		3,9		9,8	20P - 84.88	509		
VOLPI MRL K1	0,63	480	1,9	120X3**	4,6	20P - 33.42	201	88	
VOLPI MRL K1	1,00		2,9		7,3	20P - 53.05	318		
VOLPI MRL K1	1,60		4,7		11,8	20P - 84.88	509		
VOLPI MRL K1	0,63	630	2,4	120X3**	6,1	20P - 33.42	201	116	
VOLPI MRL K1	1,00		3,9		9,6	20P - 53.05	318		
VOLPI MRL K1	1,60		6,2		15,4	20P - 84.88	509		
VOLPI MRL K1	0,63	320	1,2	140X3**	3,3	20P - 28.65	172	69	
VOLPI MRL K1	1,00		2,0		4,9	20P - 45.47	273		
VOLPI MRL K1	1,60		3,1		7,8	20P - 72.76	437		
VOLPI MRL K1	0,63	400	1,5	140X3**	4,1	20P - 28.65	172	86	
VOLPI MRL K1	1,00		2,4		6,1	20P - 45.47	273		
VOLPI MRL K1	1,60		3,9		9,8	20P - 72.76	437		
VOLPI MRL K1	0,63	480	1,9	140X3**	4,9	20P - 28.65	172	103	
VOLPI MRL K1	1,00		2,9		7,3	20P - 45.47	273		
VOLPI MRL K1	1,60		4,7		11,8	20P - 72.76	437		
VOLPI MRL K1	0,63	320	1,2	160X3**	3,3	20P - 25.07	150	78	
VOLPI MRL K1	1,00		2,0		4,9	20P - 39.79	239		
VOLPI MRL K1	1,60		3,1		7,8	20P - 63.66	382		
VOLPI MRL K1	0,63	400	1,5	160X3**	4,1	20P - 25.07	150	98	
VOLPI MRL K1	1,00		2,4		6,1	20P - 39.79	239		
VOLPI MRL K1	1,60		3,9		9,8	20P - 63.66	382		
VOLPI MRL K1	0,63	480	1,9	160X3**	4,9	20P - 25.07	150	118	
VOLPI MRL K1	1,00		2,9		7,3	20P - 39.79	239		
VOLPI MRL K1	1,60		4,7		11,8	20P - 63.66	382		



volpi
MRL 2-KAYIŞLI
1,0 M-1000 KG



33 Metre Seyir Mesafesi

33 Meter Travel Distance

2:1 Askı

2:1 Suspension

7000 Kg Statik Yük

7000 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
VOLPI MRL K2	0,63	800	3,1	120X4**	7,7	20P - 33.42	201	147	175
VOLPI MRL K2	1,00		4,9		12,2	20P - 53.05	318		
VOLPI MRL K2	1,60		7,8		19,6	20P - 84.88	509		
VOLPI MRL K2	0,63	1000	3,9	120X5**	9,6	20P - 33.42	201	184	
VOLPI MRL K2	1,00		6,1		15,3	20P - 53.05	318		
VOLPI MRL K2	1,60		9,8		24,5	20P - 84.88	509		
VOLPI MRL K2	0,63	630	2,4	140X3**	6,5	20P - 28.65	172	135	
VOLPI MRL K2	1,00		3,9		9,6	20P - 45.47	273		
VOLPI MRL K2	1,60		6,2		15,4	20P - 72.76	437		
VOLPI MRL K2	0,63	800	3,1	140X4**	8,2	20P - 28.65	172	172	
VOLPI MRL K2	1,00		4,9		12,2	20P - 45.47	273		
VOLPI MRL K2	1,60		7,8		19,6	20P - 72.76	437		
VOLPI MRL K2	0,63	1000	3,9	140X5**	10,2	20P - 28.65	172	215	
VOLPI MRL K2	1,00		6,1		15,3	20P - 45.47	273		
VOLPI MRL K2	1,60		9,8		24,5	20P - 72.76	437		
VOLPI MRL K2	0,63	630	2,4	160X3**	6,5	20P - 25.07	150	155	
VOLPI MRL K2	1,00		3,9		9,6	20P - 39.79	239		
VOLPI MRL K2	1,60		6,2		15,4	20P - 63.66	382		
VOLPI MRL K2	0,63	800	3,1	160X4**	8,2	20P - 25.07	150	196	
VOLPI MRL K2	1,00		4,9		12,2	20P - 39.79	239		
VOLPI MRL K2	1,60		7,8		19,6	20P - 63.66	382		
VOLPI MRL K2	0,63	1000	3,9	160X5**	10,2	20P - 25.07	150	245	
VOLPI MRL K2	1,00		6,1		15,3	20P - 39.79	239		
VOLPI MRL K2	1,60		9,8		24,5	20P - 63.66	382		

**51 Metre Seyir Mesafesi**



51 Meter Travel Distance

2:1 Askı

2:1 Suspension





7000 Kg Statik Yük

7000 Kg Static Load

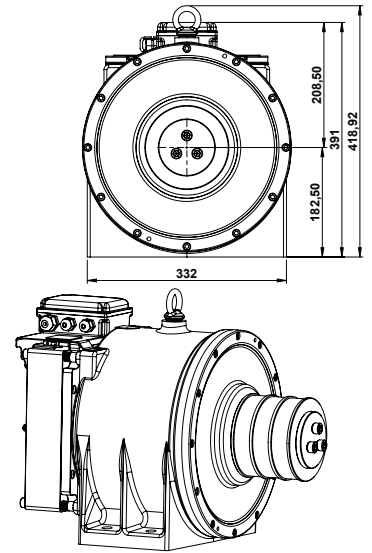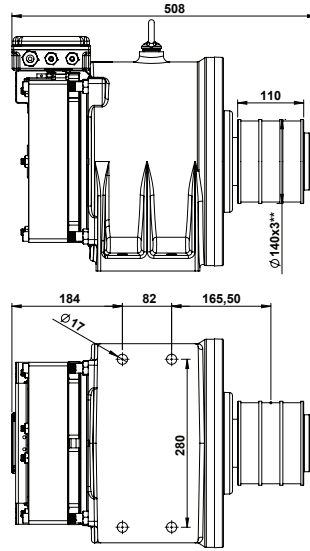

AKIS
AK 1-KAYIŞLI
1,0 M-480 KG

Ürün Product	Hız (m/s) Speed (m/s)	Kapasite (Kg) Capacity (Kg)	Çıkış Gücü (kW) Power Output (kW)	Kasnak (mm) Sheave (mm)	Amper (A) Current (A)	Kutup-Frekans Pole-Frequency	Devir (rpm) Revolution (rpm)	Tork (Nm) Torque (Nm)	Makine Ağırlığı (Kg) Machine Weight (Kg)
AK K1	0,63	320	1,2	120X3**	3,1	20P - 33.42	201	59	155
AK K1	1,00		2,0		4,9	20P - 53.05	318		
AK K1	1,60		3,1		7,8	20P - 84.88	509		
AK K1	0,63	400	1,5	120X3**	3,9	20P - 33.42	201	74	
AK K1	1,00		2,4		6,1	20P - 53.05	318		
AK K1	1,60		3,9		9,8	20P - 84.88	509		
AK K1	0,63	480	1,9	120X3**	4,6	20P - 33.42	201	88	
AK K1	1,00		2,9		7,3	20P - 53.05	318		
AK K1	1,60		4,7		11,8	20P - 84.88	509		
AK K1	0,63	630	2,4	120X4**	6,1	20P - 33.42	201	116	
AK K1	1,00		3,9		9,6	20P - 53.05	318		
AK K1	1,60		6,2		15,4	20P - 84.88	509		
AK K1	0,63	320	1,2	140X3**	3,3	20P - 28.65	172	69	
AK K1	1,00		2,0		4,9	20P - 45.47	273		
AK K1	1,60		3,1		7,8	20P - 72.76	437		
AK K1	0,63	400	1,5	140X3**	4,1	20P - 28.65	172	86	
AK K1	1,00		2,4		6,1	20P - 45.47	273		
AK K1	1,60		3,9		9,8	20P - 72.76	437		
AK K1	0,63	480	1,9	140X3**	4,9	20P - 28.65	172	103	
AK K1	1,00		2,9		7,3	20P - 45.47	273		
AK K1	1,60		4,7		11,8	20P - 72.76	437		
AK K1	0,63	320	1,2	160X3**	3,3	20P - 25.07	150	78	
AK K1	1,00		2,0		4,9	20P - 39.79	239		
AK K1	1,60		3,1		7,8	20P - 63.66	382		
AK K1	0,63	400	1,5	160X3**	4,1	20P - 25.07	150	98	
AK K1	1,00		2,4		6,1	20P - 39.79	239		
AK K1	1,60		3,9		9,8	20P - 63.66	382		
AK K1	0,63	480	1,9	160X3**	4,9	20P - 25.07	150	118	
AK K1	1,00		2,9		7,3	20P - 39.79	239		
AK K1	1,60		4,7		11,8	20P - 63.66	382		



AKIS
AK 2-KAYIŞLI
1,0 M-1000 KG


51 Metre Seyir Mesafesi

51 Meter Travel Distance

2:1 Askı

2:1 Suspension





7000 Kg Statik Yük

7000 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
AK K2	0,63	800	3,1	120X4**	7,7	20P - 33.42	201	147	185
AK K2	1,00		4,9		12,2	20P - 53.05	318		
AK K2	1,60		7,8	120X5**	19,6	20P - 84.88	509		
AK K2	0,63	1000	3,9	120X5**	9,6	20P - 33.42	201	184	
AK K2	1,00		6,1		15,3	20P - 53.05	318		
AK K2	1,60		9,8		24,5	20P - 84.88	509		
AK K2	0,63	630	2,4	140X3**	6,5	20P - 28.65	172	135	
AK K2	1,00		3,9		9,6	20P - 45.47	273		
AK K2	1,60		6,2	140X4**	15,4	20P - 72.76	437		
AK K2	0,63	800	3,1	160X4**	8,2	20P - 28.65	172	172	
AK K2	1,00		4,9		12,2	20P - 45.47	273		
AK K2	1,60		7,8	160X5**	19,6	20P - 72.76	437		
AK K2	0,63	1000	3,9	160X5**	10,2	20P - 28.65	172	215	
AK K2	1,00		6,1		15,3	20P - 45.47	273		
AK K2	1,60		9,8		24,5	20P - 72.76	437		







33 Metre Seyir Mesafesi
33 Meter Travel Distance
2:1 Askı
2:1 Suspension
7000 Kg Statik Yük
7000 Kg Static Load

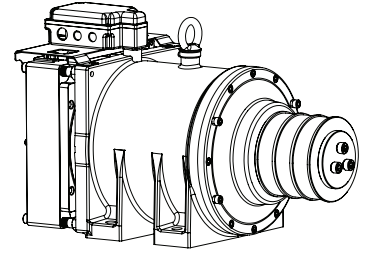

AKIS
S 100-KAYIŞLI
1,0 M-480 KG

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
S 100 K1	0,63	320	1,2	120X3**	3,1	20P - 33,42	201	59	190
S 100 K1	1,00		2,0		4,9	20P - 53,05	318		
S 100 K1	1,60		3,1		7,8	20P - 84,88	509		
S 100 K1	0,63	400	1,5	120X3**	3,9	20P - 33,42	201	74	
S 100 K1	1,00		2,4		6,1	20P - 53,05	318		
S 100 K1	1,60		3,9		9,8	20P - 84,88	509		
S 100 K1	0,63	480	1,9	120X3**	4,6	20P - 33,42	201	88	
S 100 K1	1,00		2,9		7,3	20P - 53,05	318		
S 100 K1	1,60		4,7		11,8	20P - 84,88	509		
S 100 K1	0,63	320	1,2	140X3**	3,3	20P - 28,65	172	69	
S 100 K1	1,00		2,0		4,9	20P - 45,47	273		
S 100 K1	1,60		3,1		7,8	20P - 72,76	437		
S 100 K1	0,63	400	1,5	140X3**	4,1	20P - 28,65	172	86	
S 100 K1	1,00		2,4		6,1	20P - 45,47	273		
S 100 K1	1,60		3,9		9,8	20P - 72,76	437		
S 100 K1	0,63	320	1,2	160X3**	3,3	20P - 25,07	150	78	
S 100 K1	1,00		2,0		4,9	20P - 39,79	239		
S 100 K1	1,60		3,1		7,8	20P - 63,66	382		
S 100 K1	0,63	400	1,5	160X3**	4,1	20P - 25,07	150	98	
S 100 K1	1,00		2,4		6,1	20P - 39,79	239		
S 100 K1	1,60		3,9		9,8	20P - 63,67	382		

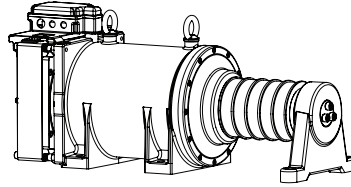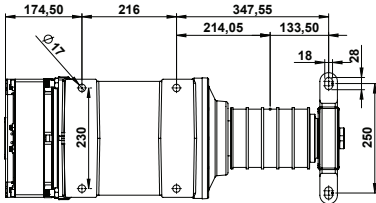

AKIS
S 200-KAYIŞLI
1,0 M-1000 KG



33 Metre Seyir Mesafesi

33 Meter Travel Distance

2:1 Askı

2:1 Suspension

7000 Kg Statik Yük

7000 Kg Static Load

Ürün	Hız (m/s)	Kapasite (Kg)	Çıkış Gücü (kW)	Kasnak (mm)	Amper (A)	Kutup-Frekans	Devir (rpm)	Tork (Nm)	Makine Ağırlığı (Kg)
Product	Speed (m/s)	Capacity (Kg)	Power Output (kW)	Sheave (mm)	Current (A)	Pole-Frequency	Revolution (rpm)	Torque (Nm)	Machine Weight (Kg)
S 200 K2	0,63	630	2,4	120X3**	6,1	20P - 33,42	201	116	215
S 200 K2	1,00		3,9		9,6	20P - 53,05	318		
S 200 K2	1,60		6,2		15,4	20P - 84,88	509		
S 200 K2	0,63	800	3,1	120X4**	7,7	20P - 33,42	201	147	
S 200 K2	1,00		4,9		12,2	20P - 53,05	318		
S 200 K2	1,60		7,8		120X5**	19,6	20P - 84,88		
S 200 K2	0,63	1000	3,9	120X5**	9,6	20P - 33,42	201	184	
S 200 K2	1,00		6,1		15,3	20P - 53,05	318		
S 200 K2	1,60		9,8		24,5	20P - 84,88	509		
S 200 K2	0,63	480	1,9	140X3**	4,9	20P - 28,65	172	103	
S 200 K2	1,00		2,9		7,3	20P - 45,47	273		
S 200 K2	1,60		4,7		11,8	20P - 72,76	437		
S 200 K2	0,63	630	2,4	140X3**	6,5	20P - 28,65	172	135	
S 200 K2	1,00		3,9		9,6	20P - 45,47	273		
S 200 K2	1,60		6,2		15,4	20P - 72,76	437		
S 200 K2	0,63	800	3,1	140X4**	8,2	20P - 28,65	172	172	
S 200 K2	1,00		4,9		12,2	20P - 45,47	273		
S 200 K2	1,60		7,8		140X5**	19,6	20P - 72,76		
S 200 K2	0,63	1000	3,9	140X5**	10,2	20P - 28,65	172	215	
S 200 K2	1,00		6,1		15,3	20P - 45,47	273		
S 200 K2	1,60		9,8		24,5	20P - 72,76	437		
S 200 K2	0,63	480	1,9	160X3**	4,9	20P - 25,07	150	118	
S 200 K2	1,00		2,9		7,3	20P - 39,79	239		
S 200 K2	1,60		4,7		11,8	20P - 63,68	382		
S 200 K2	0,63	630	2,4	160X3**	6,5	20P - 25,07	150	155	
S 200 K2	1,00		3,9		9,6	20P - 39,79	239		
S 200 K2	1,60		6,2		15,4	20P - 63,69	382		
S 200 K2	0,63	800	3,1	160X4**	8,2	20P - 25,07	150	196	
S 200 K2	1,00		4,9		12,2	20P - 39,79	239		
S 200 K2	1,60		7,8		160X5**	19,6	20P - 63,70		

NOT

This image shows a full page of white paper with horizontal blue dotted lines. The lines are evenly spaced and run across the width of the page, providing a guide for handwriting practice. There are no margins, text, or other markings on the page.



OSB, Kayacık Mah. Ziyaeddin Cad. 6. Sok. No:2
42300 Selçuklu/KONYA/TÜRKİYE

Tel: +90 332 239 07 29

info@akisasensor.com.tr - www.akisasensor.com.tr